

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)
Job Location: Hopkinsville, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: J. Horsley

8/3/2026 4:27:27 PM

PC: C. Goff



Structure ID: 286 (442+60 RT)

P2 BX024036-08LD08-15X27

CB FLAT TOP 8"W w/15"x27" HOLE F/F

P3) 15" x 27" - P.I.P. - BY OTHERS - 8"
P2) 24" x 36" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 36"
1) CASTING - HOE KY-230-G F/G (GRADE)
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 20
2) Hole - 4

0 lb
1124 lb
4809 lb
237 lb
0 lb
0 lb
0 lb


Structure Total: 6171 lb

Structure Notes:


- ** KYTC STATE PROJECT ****
1. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. CASTING BY ICAST (HOE KY-230 F/G).
 4. STUB #5 BARS UP 6" AROUND 15x27 OPENING IN TOP SLAB (SPA@12"C/C)
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT).
- WALLS (As .31) #5 BARS AT 12" C.C.E.W..
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO KYTC DBI TYPE 13G/ASTM C-931 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: DOUBLE MAT #5 BAR @ 6" C.C. E.W. (GRADE 60).
4. STUB #5 BARS 6" OUT TOP SLAB AROUND OPENING @ 12" C/C.

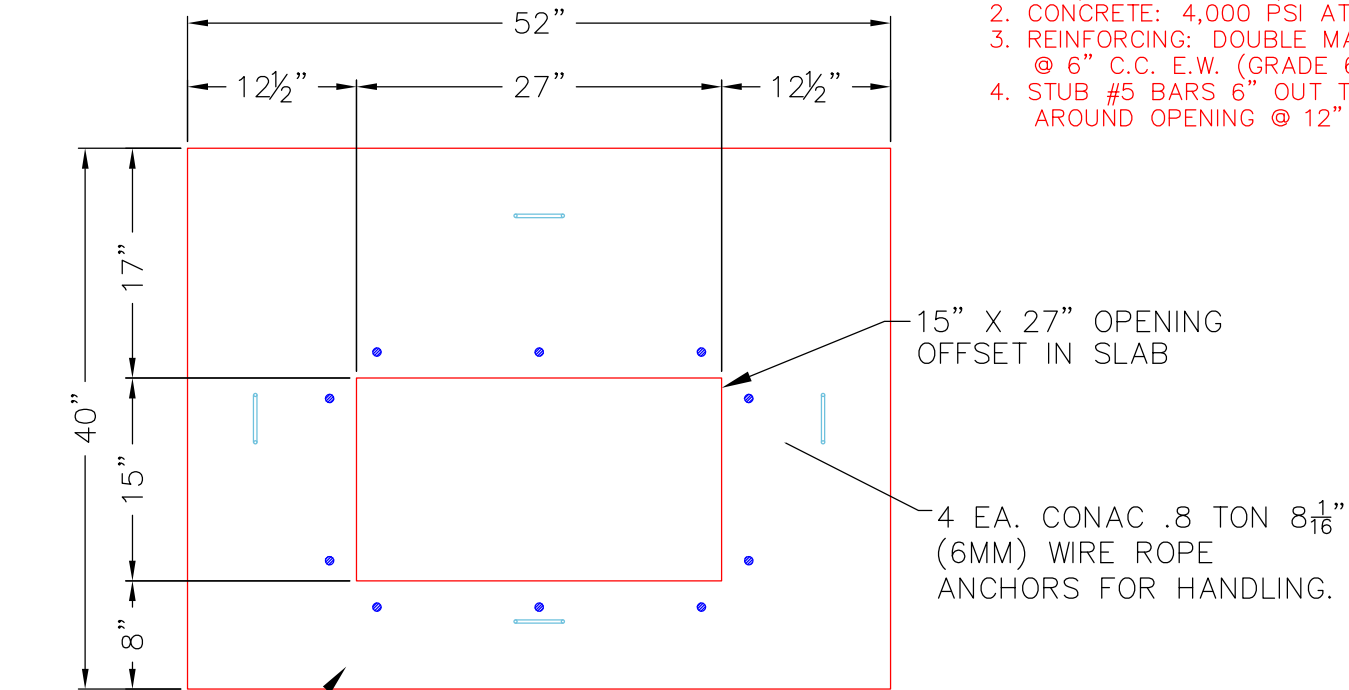

PLAN VIEW

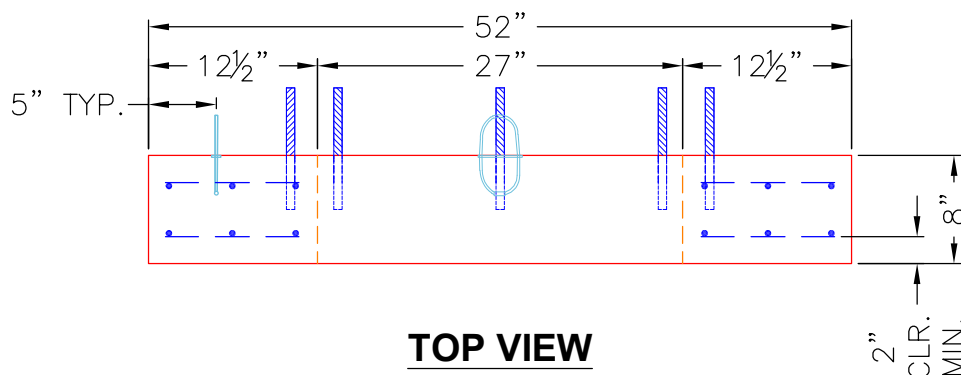

TOP VIEW

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1124 lb
Volume (Net): 0.29cu.yd