

Contractor: Scotty's Contracting & Stone, LLC

TECH: J. Horsley

Plant: Beaver Dam



Size: 24" x 30"

Rim to Invert: 3'

Floor Height: 8"


Slack: 0.25"

REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .31) #5 BARS AT 12" C.C.E.W..
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

1) Hole - 20

0 lb

Structure Total: 4453 lb

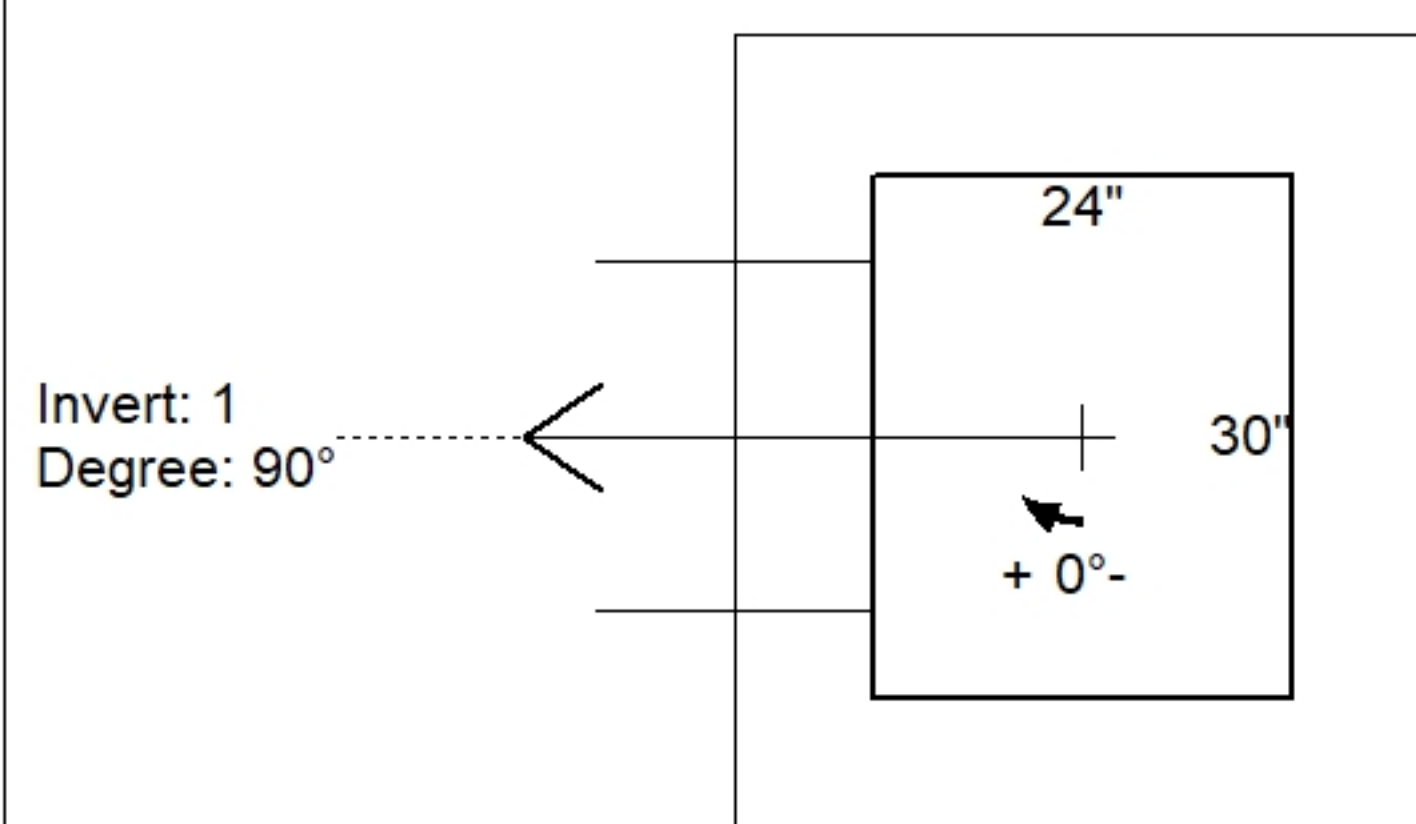


Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	526.5'							
Reducer								
Invert 1	523.5'	90°	15" HDPE	17.6"	20"	Hole 20	-1.3"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 30" - CASTING HEIGHT - 3.75" - (P2)

24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 32" - (P1)

Default - Interior Dimensions

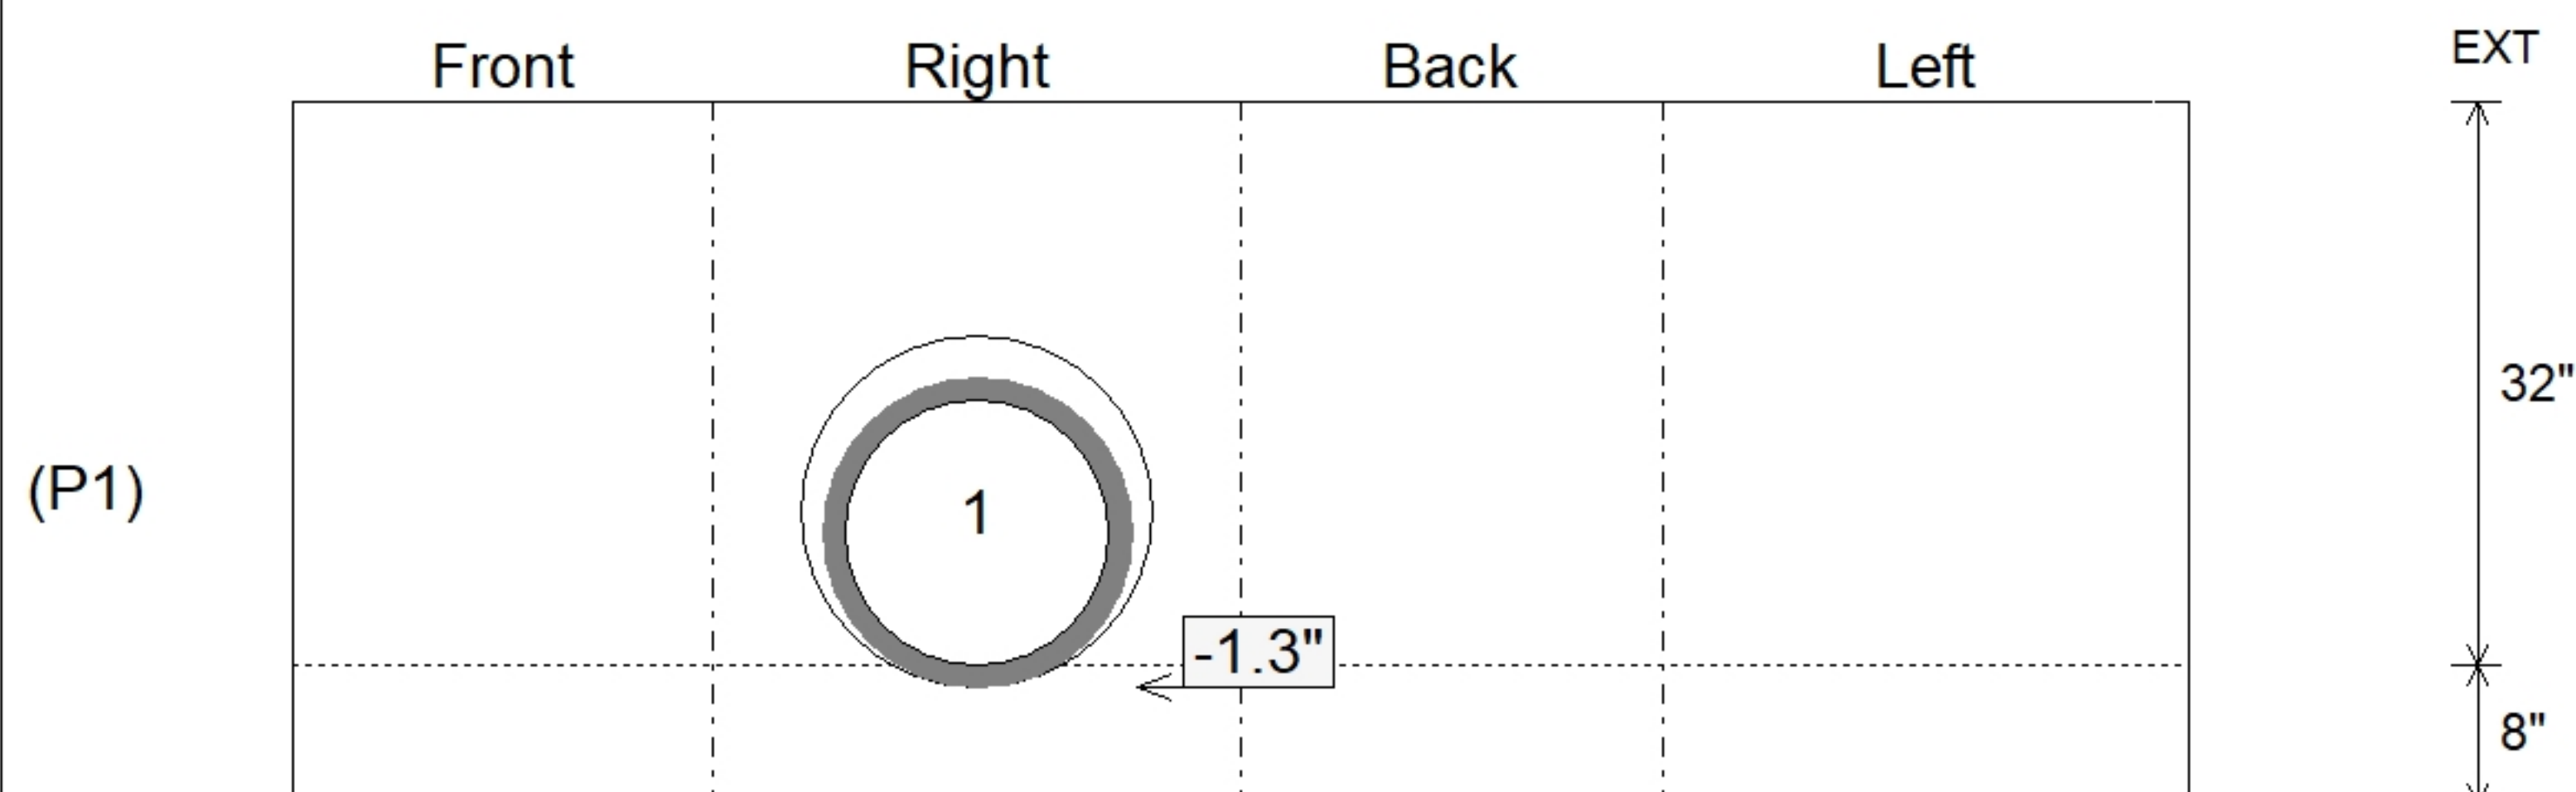

Submittal Drawing
8/3/2026 4:18:07 PM

SUBMITTAL
APPROVED BY: