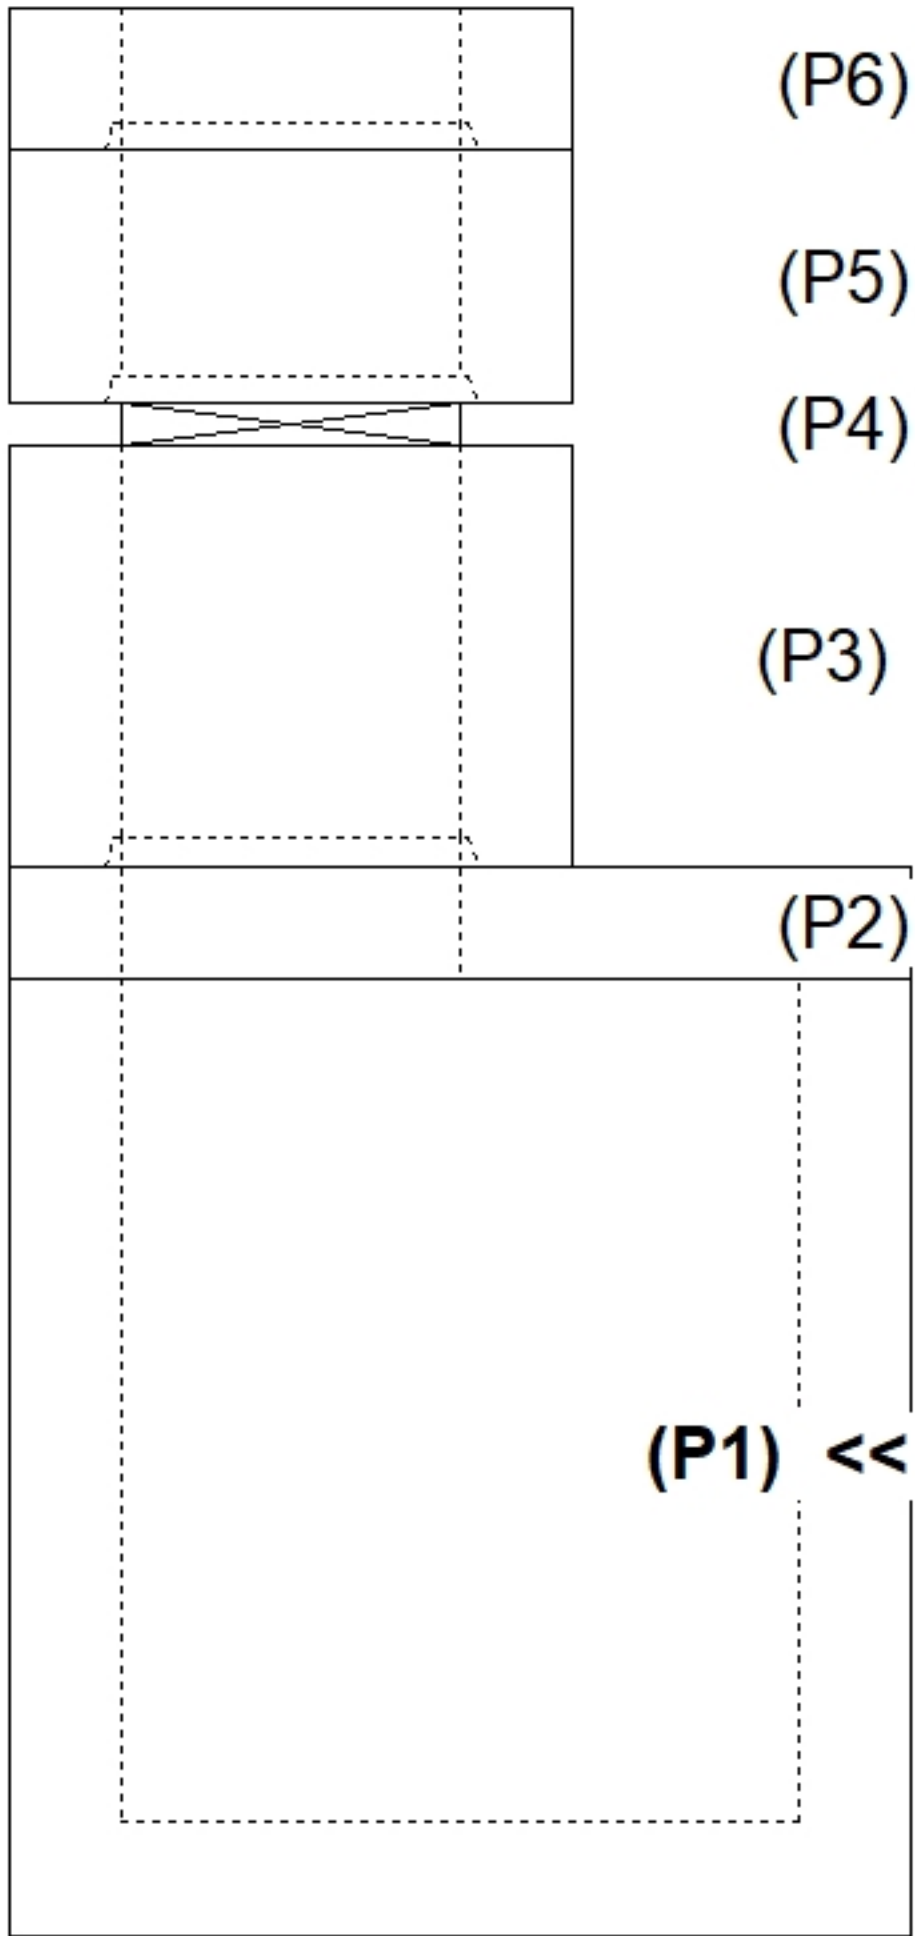
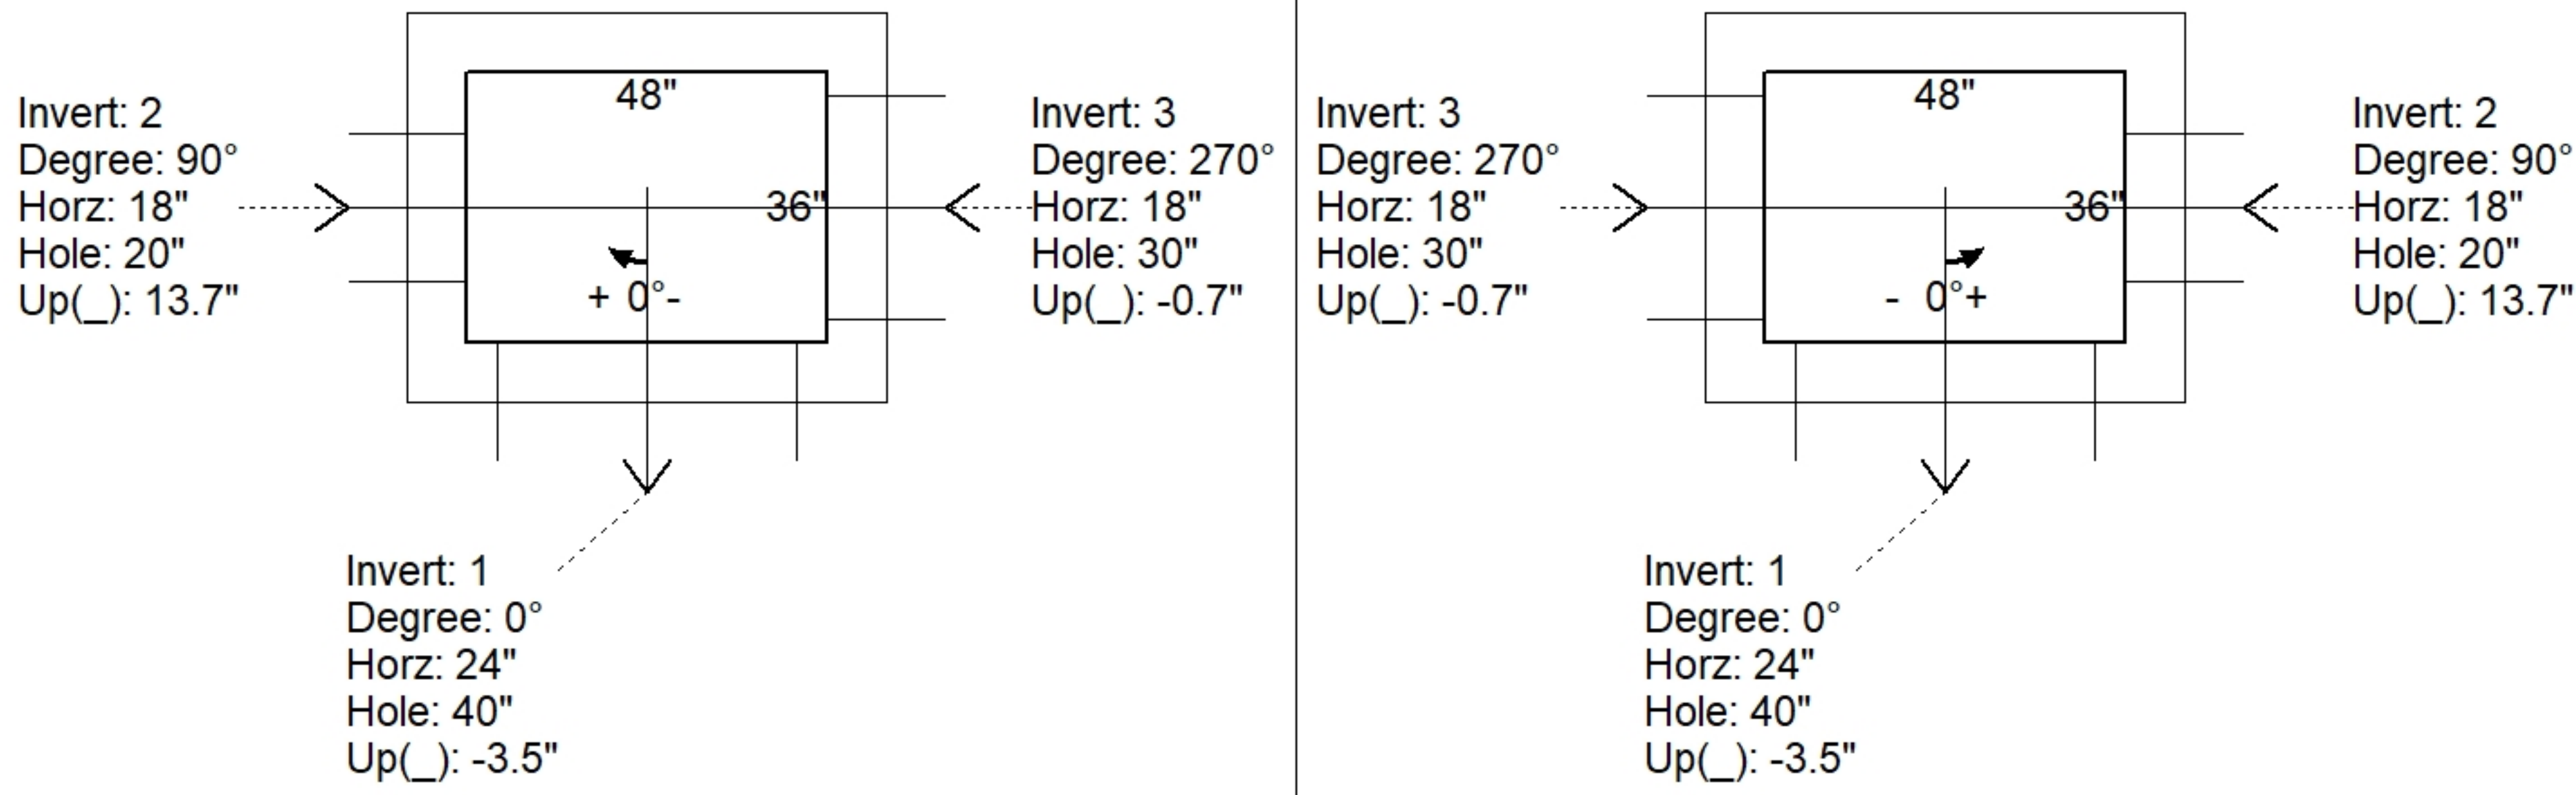
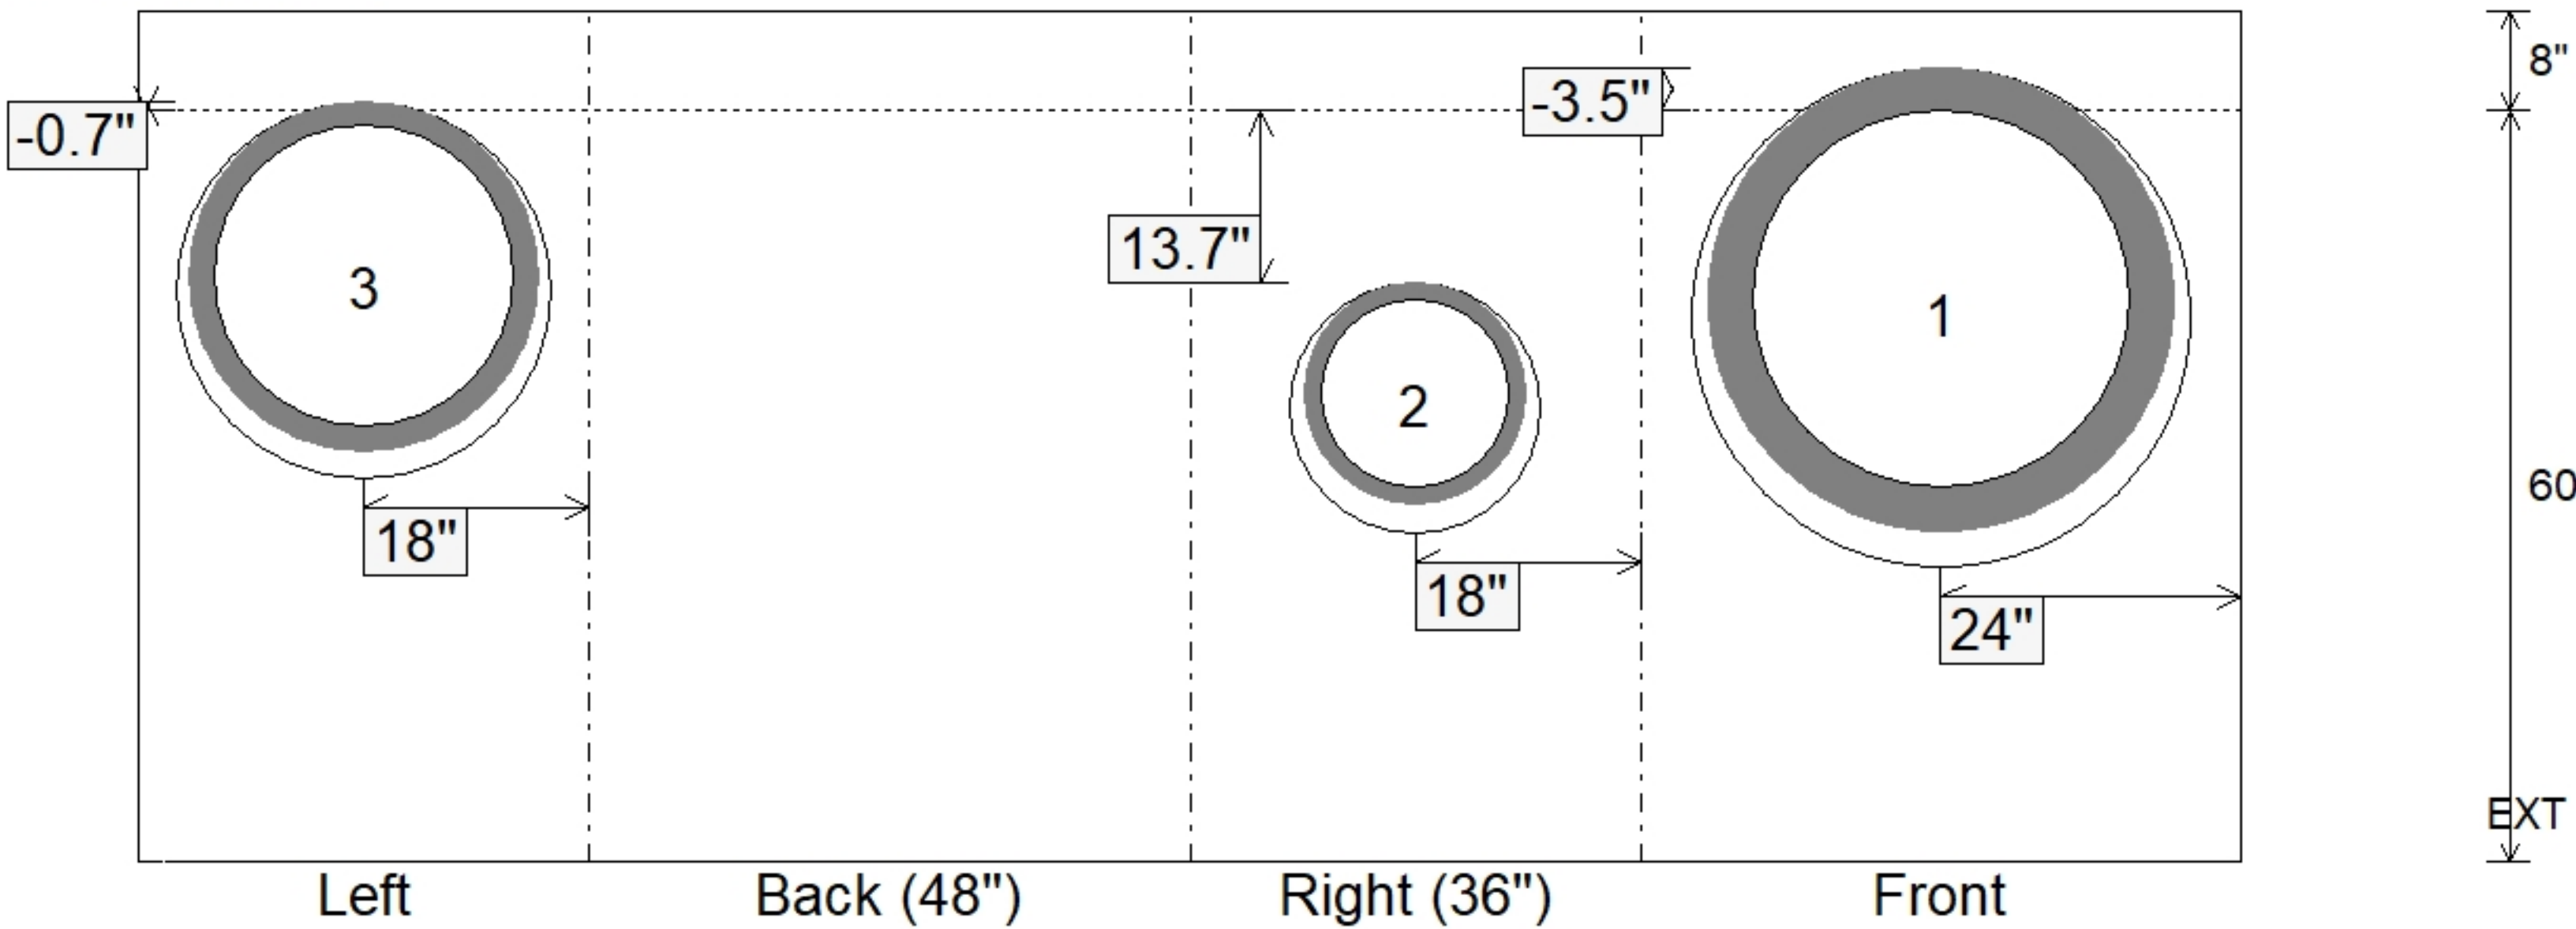


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 8/3/2026 4:21:11 PM		Tech: J. Horsley PC: C. Goff				
Structure ID: 302 (451+00 LT)										
P1		BX4836-08BA60			BOX BASE 8inW, 8inF F/n					
P6) 24" x 120" - CB INLET KY A 10' TOP SAG F/G - 10" P5) 24" x 120" - CB INLET KY A 10' BOTTOM SAG T/G - 18" P4) 24" x 36" - FIELD ADJUSTMENT - 3" P3) 24" x 36" - BOX RISER 8inW F/G - 30" P2) 48" x 36" - CB FT REDUCER 24"X36" HOLE T/F - 8" P1) 48" x 36" - BOX BASE 8inW, 8inF F/n - 60" 1) CASTING - HOE KY-206 F/C (KY TY1) 2) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 40 1) Hole - 20 1) Hole - 30 2) Hole - 6					3398 lb 5270 lb 0 lb 3023 lb 1654 lb 8761 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 22312 lb		Structure Notes: . ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. HOE KY-206 F/C CAST INTO TOP SLAB. . REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 529.95' Rim to Invert: 10.76' Slack: 0.12" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	519.19'	0°	32"	30" RCP B WALL	37"	Hole 40	40"	40"	-3.5"	0"
Invert 2	520.44'	90°	26"	15" HDPE	17.6"	Hole 20	20"	20"	13.7"	0"
Invert 3	519.29'	270°	26"	24" HDPE	27.8"	Hole 30	30"	30"	-0.7"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)					UPSIDE-DOWN VIEW (int. dimenions)					
										
INSIDE WALL DIMENSIONS										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 60" Height (Ext): 68"		Weight (Net): 8761 lb Volume (Net): 2.24cu.yd	