

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)
Job Location: Hopkinsville, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
8/3/2026 4:27:52 PM

Tech: J. Horsley
PC: C. Goff



Structure ID: 310 (452+55 RT)


P3 BX032032-08LD08SP

BX FLAT LID 8inW SPEC. (KY JB-B1) F/F

P4) CASTING (cast in) - 0
P3) 32" x 32" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"
P2) 32" x 32" - BOX RISER 8inW F/G - 24"
P1) 32" x 32" - BOX BASE 8inW, 8inF, Variable Ht T/n - 50"
1) CASTING - HOE KY-206 F/C (KY TY1)
2) 32" x 32" - SGL 1"x14.5" Butyl
2) Hole - 30
1) Hole - 20

0 lb
1243 lb
2578 lb
5757 lb
206 lb
0 lb
0 lb
0 lb
Structure Total: 9784 lb

Structure Notes:
KYTC STATE PROJECT
1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

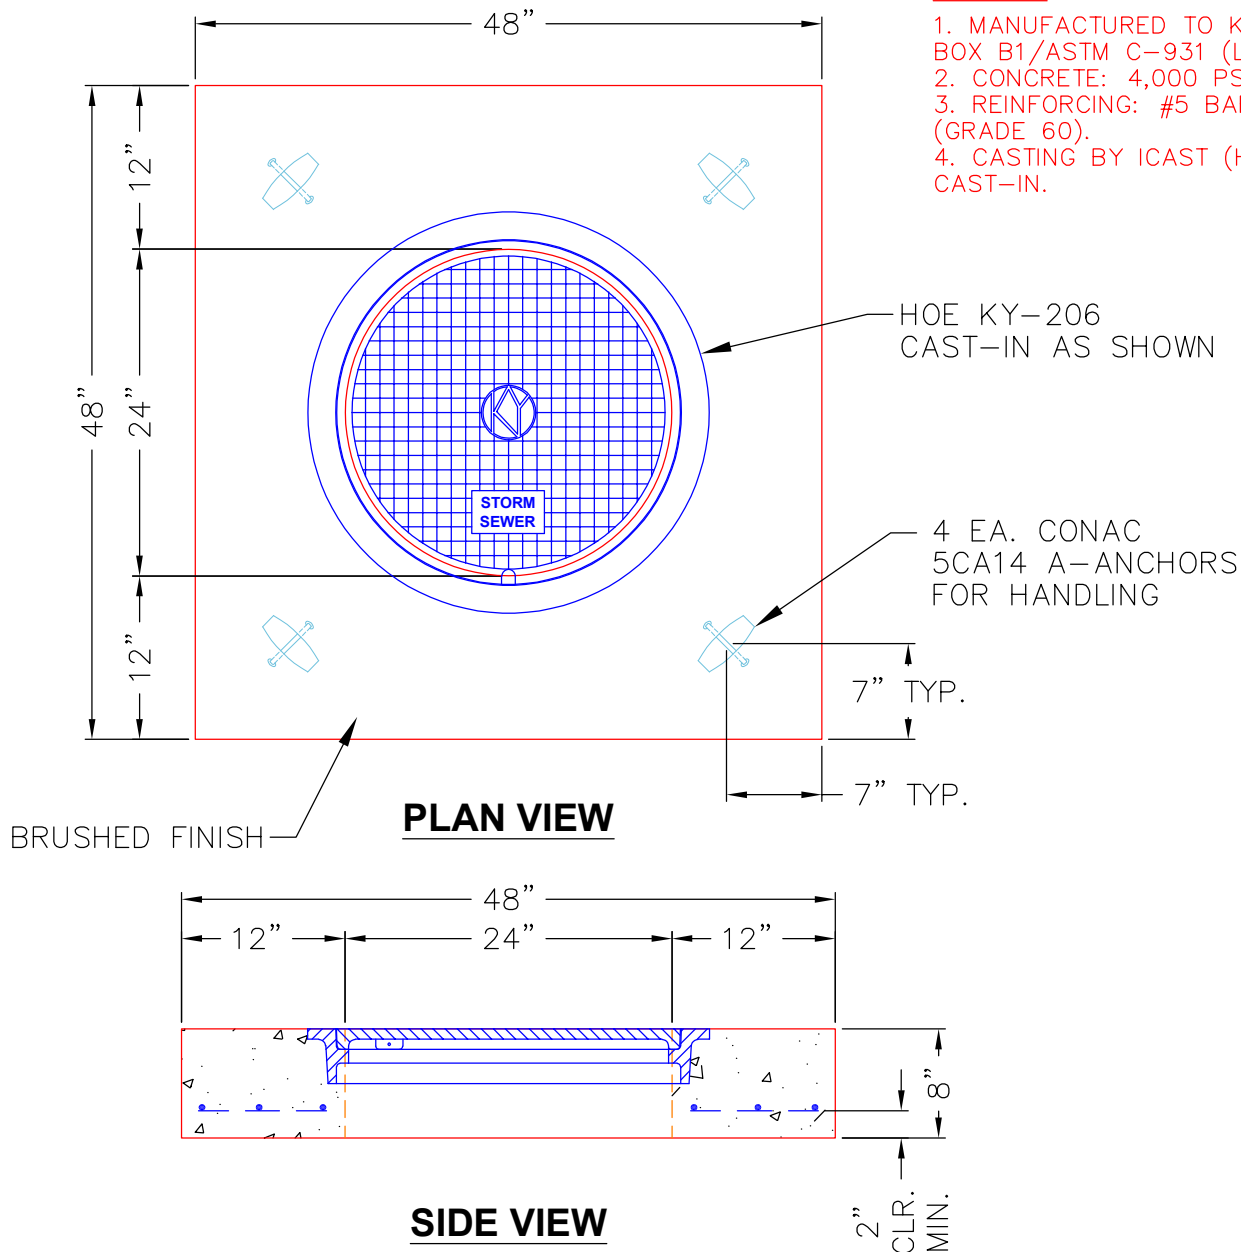

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1243 lb
Volume (Net): 0.32cu.yd