


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 8/3/2026 4:22:46 PM		Tech: J. Horsley PC: C. Goff					
Structure ID: 313 (455+59 LT)											
P1		BX2460-08BA18		BOX BASE 8inW, 8inF F/n							
P4) 15" x 59" - P.I.P. - BY OTHERS - 8" P3) 15" x 59" - FIELD ADJUSTMENT - 2" P2) 24" x 60" - BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S) F/F - 8" P1) 24" x 60" - BOX BASE 8inW, 8inF F/n - 18" 1) CASTING - HOE KY-230-G F/G (GRADE) 1) 24" x 60" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 20"x19.25" 2) Hole - 4				0 lb 0 lb 1461 lb 4037 lb 237 lb 0 lb 0 lb 0 lb ----- Structure Total: 5735 lb		Structure Notes: **KYTC STATE PROJECT** 1. KYTC DBI TYPE 13S / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-230S F/G SHIPPED LOOSE). 4. STUB #5 BARS 4" OUT TOP OF TOP SLAB (SPA AT 12" C/C) AROUND 15"x59" HOLE. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT). - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 526.68'		Rim to Invert: 3'		Slack: 0"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	523.68'	325°	49.129"	15" HDPE	17.6"	DOGHOUSE INVRTD 20"x19.25"	20" x 19.25"	34.869"	-1.3"	-10"	
Invert 2	524.5'	90°	38"	4" WEEP HOLE	4"	Hole 4	4"	4"	9.84"	0"	
Invert 3	524.5'	270°	12"	4" WEEP HOLE	4"	Hole 4	4"	4"	9.84"	-26"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

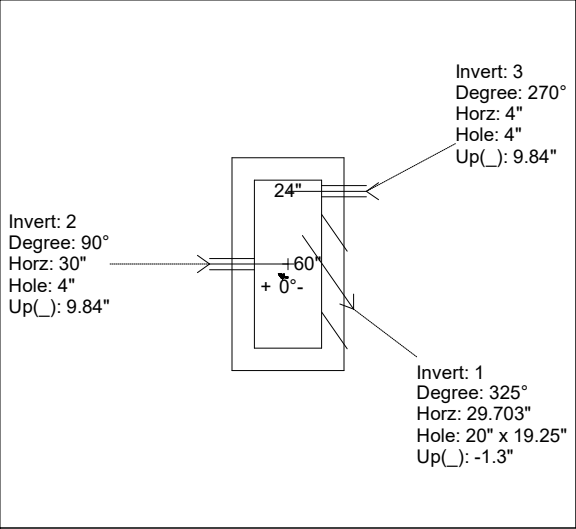

UPSIDE-DOWN VIEW (int. dimensions)


2-Stage Pour Required

First pour drawing
First pour weight = 2,040 LBS
Second pour weight = 1,997 LBS



#5 L Bar cast in for wall attachment


INSIDE WALL DIMENSIONS

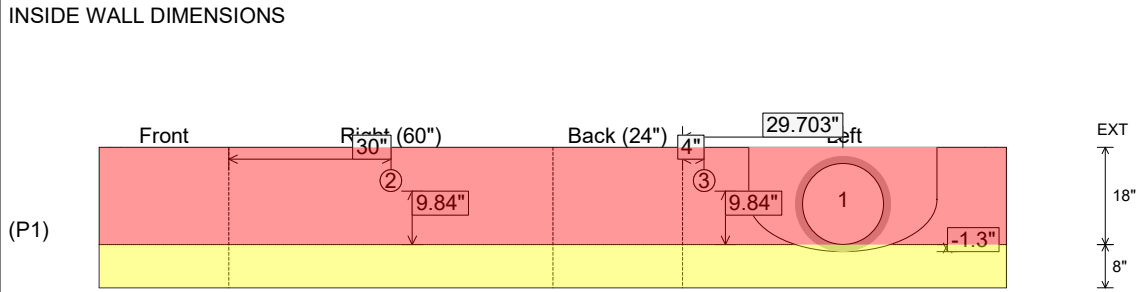

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 18" Height (Ext): 26"	Weight (Net): 4037 lb Volume (Net): 1.03cu.yd
----------------------------------	-------------------------------	--	--	--

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 8/3/2026 4:22:46 PM		Tech: J. Horsley PC: C. Goff					
Structure ID: 313 (455+59 LT)											
P1		BX2460-08BA18		BOX BASE 8inW, 8inF F/n							
P4) 15" x 59" - P.I.P. - BY OTHERS - 8" P3) 15" x 59" - FIELD ADJUSTMENT - 2" P2) 24" x 60" - BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S) F/F - 8" P1) 24" x 60" - BOX BASE 8inW, 8inF F/n - 18" 1) CASTING - HOE KY-230-G F/G (GRADE) 1) 24" x 60" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 20"x19.25" 2) Hole - 4				0 lb 0 lb 1461 lb 4037 lb 237 lb 0 lb 0 lb 0 lb ----- Structure Total: 5735 lb		Structure Notes: **KYTC STATE PROJECT** 1. KYTC DBI TYPE 13S / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-230S F/G SHIPPED LOOSE). 4. STUB #5 BARS 4" OUT TOP OF TOP SLAB (SPA AT 12" C/C) AROUND 15"x59" HOLE. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT). - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 526.68'		Rim to Invert: 3'		Slack: 0"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	523.68'	325°	49.129"	15" HDPE	17.6"	DOGHOUSE INVRTD 20"x19.25"	20" x 19.25"	34.869"	-1.3"	-10"	
Invert 2	524.5'	90°	38"	4" WEEP HOLE	4"	Hole 4	4"	4"	9.84"	0"	
Invert 3	524.5'	270°	12"	4" WEEP HOLE	4"	Hole 4	4"	4"	9.84"	-26"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

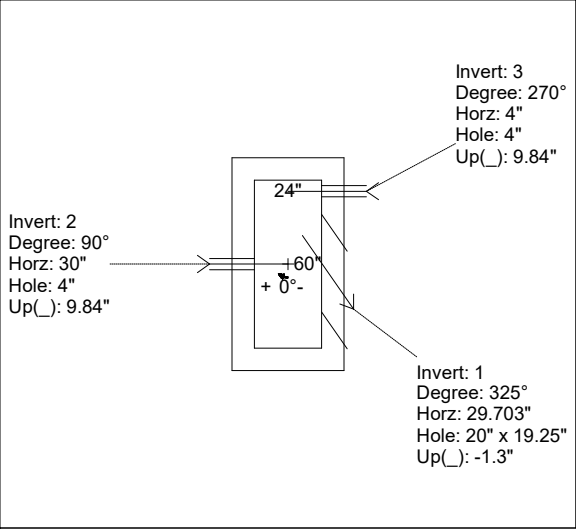

UPSIDE-DOWN VIEW (int. dimensions)


2-Stage Pour Required

Second pour drawing

First pour weight = 2,040 LBS

Second pour weight = 1,997 LBS

INSIDE WALL DIMENSIONS

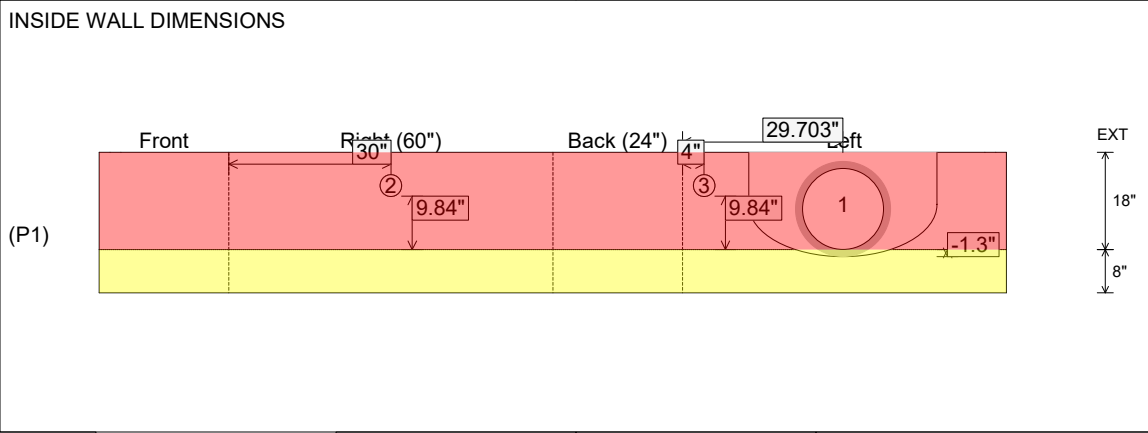

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 18" Height (Ext): 26"	Weight (Net): 4037 lb Volume (Net): 1.03cu.yd
----------------------------------	-------------------------------	--	--	--