

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)  
Job Location: Hopkinsville, KY  
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam  
8/3/2026 4:27:49 PM

Tech: J. Horsley  
PC: C. Goff



## Structure ID: 320 (451+61 LT)

**P2 BX024060-08LD08-1559**

**BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S)**

P3) 15" x 59" - P.I.P. - BY OTHERS - 8"  
P2) 24" x 60" - BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S) F/F - 8"  
P1) 24" x 60" - BOX BASE 8inW, 8inF, Variable Ht F/n - 23"  
1) CASTING - HOE KY-230-G F/G (GRADE)  
1) 24" x 60" - Conseal CS-102 1.00"  
1) Hole - 20  
2) Hole - 4


Structure Total:

0 lb  
1461 lb  
4901 lb  
237 lb  
0 lb  
0 lb  
0 lb  
-----  
6599 lb

**Structure Notes:**  
\*\*KYTC STATE PROJECT\*\*  
1. KYTC DBI TYPE 13S / ASTM C-913 SPEC'S.  
2. CONCRETE = 4,000 PSI AT 28 DAYS.  
3. CASTING BY ICAST (HOE KY-230S F/G SHIPPED LOOSE).  
4. STUB #5 BARS 4" OUT TOP OF TOP SLAB (SPA AT 12" C/C) AROUND 15"x59" HOLE.  
  
REINFORCING PER ASTM A615 (GRADE 60).  
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT).  
- WALLS (As .31) #5 BARS AT 12" C.C.E.W..  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

### NOTES:

1. MANUFACTURED TO KYTC DBI TYPE 13S/ASTM C-931 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: DOUBLE MAT #5 BAR @ 6" C.C. E.W. (GRADE 60).
4. STUB #5 BARS 4" OUT TOP SLAB AROUND OPENING @ 12" C/C.

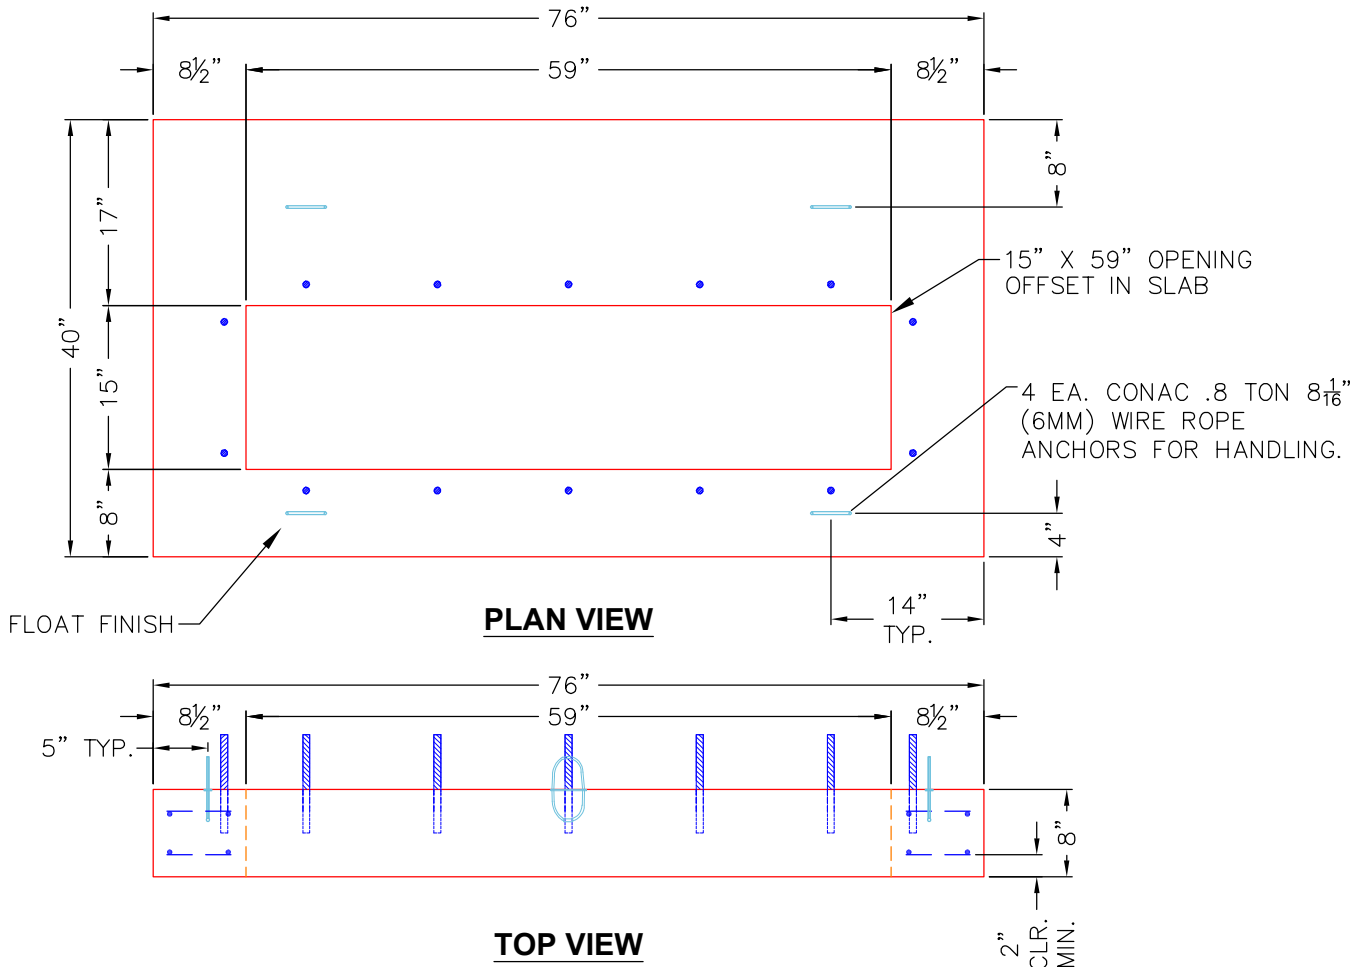

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1461 lb  
Volume (Net): 0.37cu.yd