

Structure ID: CB2

P1 BX3636-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P2) 36" x 36" - CASTING HEIGHT - 3"
- P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 56"
- 1) 36" x 36" - Conseal CS-102 1.00"
- 1) Hole - 24
- 1) Hole - 20

0 lb
 7897 lb
 0 lb
 0 lb
 0 lb

 7897 lb
 Structure Total:



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STEPS AND NO INVERT CHANNEL
 5. CASTING SUPPLIED BY OTHERS (HOE 595 FRAME & GRATE)

Rim: 705.5' Rim to Invert: 4.93' Slack: 0.16" Sump: 0" Step Position:


| Position | Elev | Angle | Ext. (cw) | Pipe | Pipe OD | Connector | Hole | Horz Size | Up () | Offset |
|----------|---------|-------|-----------|----------|---------|-----------|------|-----------|--------|--------|
| Invert 1 | 700.57' | 20° | 29.078" | 18" HDPE | 21.2" | Hole 24 | 24" | 25.54" | -1.6" | -6" |
| Invert 2 | 700.57' | 180° | 26" | 15" HDPE | 17.6" | Hole 20 | 20" | 20" | -1.3" | 0" |
| Invert 3 | | | | | | | | | | |
| Invert 4 | | | | | | | | | | |
| Invert 5 | | | | | | | | | | |
| Invert 6 | | | | | | | | | | |
| Invert 7 | | | | | | | | | | |
| Invert 8 | | | | | | | | | | |

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

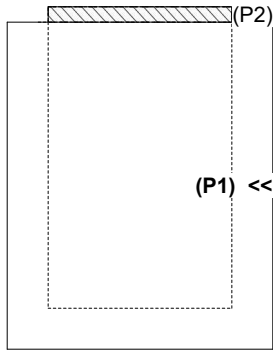

INSIDE WALL DIMENSIONS

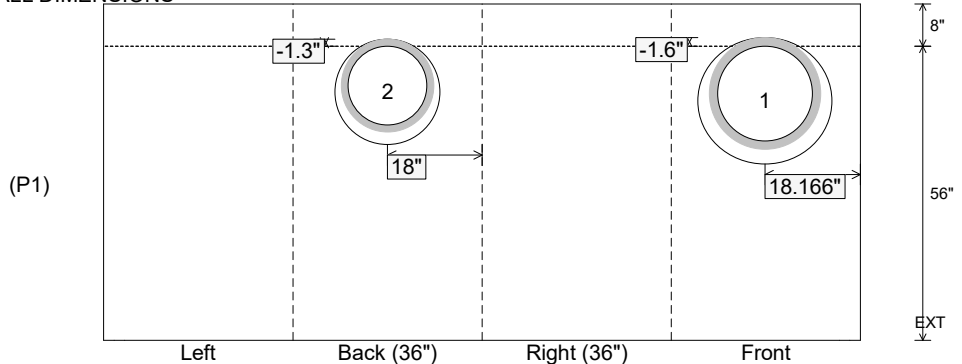

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 56"
Height (Ext): 64"

Weight (Net): 7897 lb
Volume (Net): 2.02cu.yd