


PRINT IN COLOR FOR ADDITIONAL CLARITY

#5 BAR DIAGONALS
TOP & BOTTOM
(8 EA. @ 24" &
8 EA. @ 34")

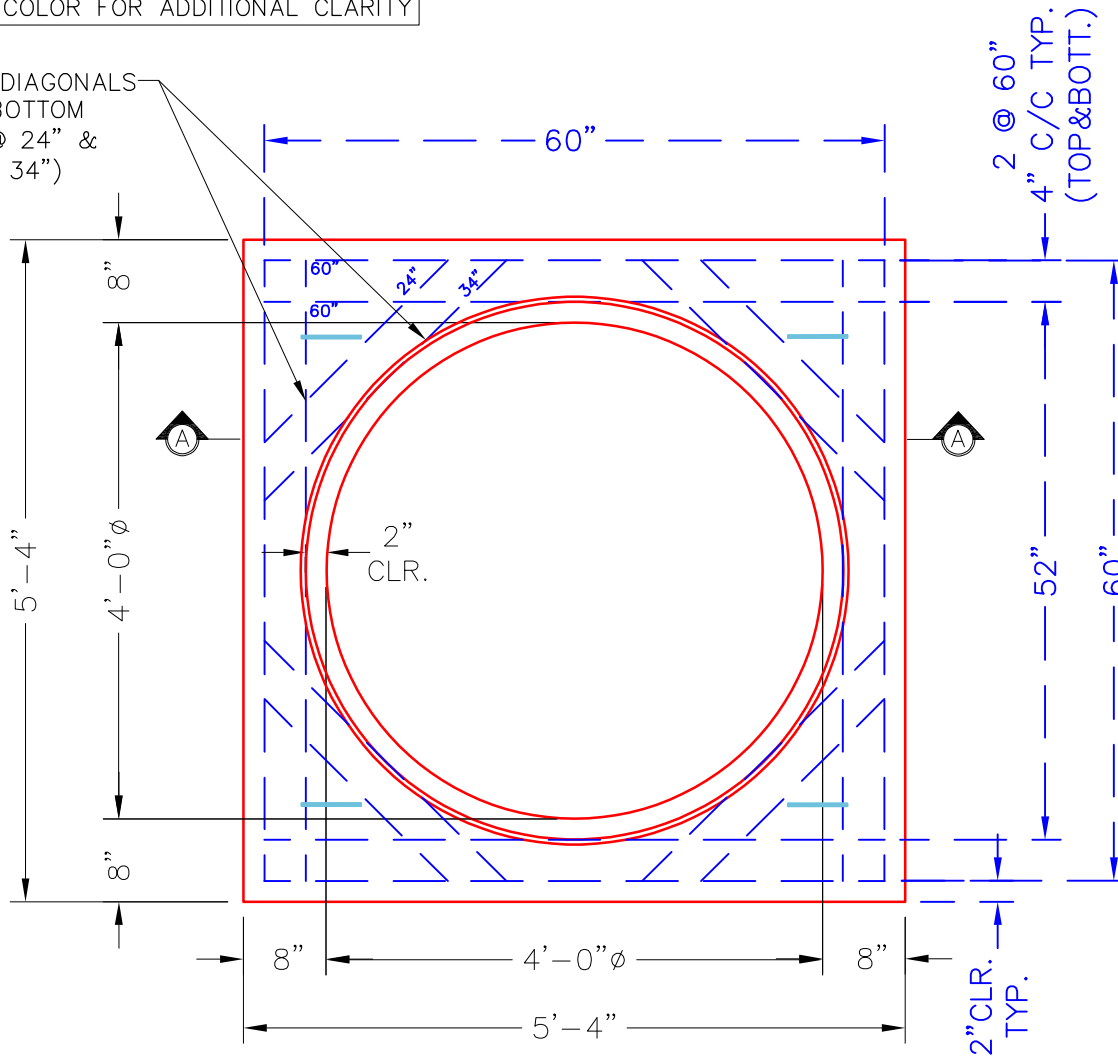

PLAN VIEW

4 EA. CONAC .8 TON $8\frac{1}{16}$ "
(6MM) WIRE ROPE ANCHORS
REQUIRED—MINIMUM.

48"Ø OPENING WITH TONGUE
FOR 48"Ø COMPONENTS.

#5 BAR @ 4"
C/C TYPICAL.
(TOP & BOTTOM)

SECTION A-A

NOTES:

- CONCRETE: 4500 PSI @ 28 DAYS.
- REINFORCING: #5 BAR @ 4" C/C-GRADE 60.
(TOP & BOTTOM LAYERS).
- KYTC CERTIFICATIONS REQUIRED.
- 4 EA. CONAC WIRE LOOP LIFTERS REQUIRED.

KYTC STATE PROJECT

#5 BAR CUT LIST
16 EA. @ 60" LG.
8 EA. @ 34" LG.
8 EA. @ 24" LG.

PRODUCTION WORK ORDER		PRODUCT I.D.:	DESCRIPTION:
		BX4848_08TS8	CB TRANSITION SLAB 48"X48" TO 48"Ø
	QUALITY CONTROL CHECKLIST		CUSTOMER: SCOTTY'S CONTRACTING & STONE LLC
	☐ ALL DIMENSIONS CORRECT.		PROJECT: KYTC CHRISTIAN CO. CALL 100 (ID 241018)
	☐ LIFTERS INSTALLED.		STRUCTURE ID.: MH278 (440+75 RT) (SEC. P2)
	☐ OPENING CENTERED.		QUOTE/ORDER NO: 24-4208
	☐ REINFORCING CORRECT.		PC: C. GOFF
	☐ SURFACE QUALITY ACCEPTABLE.		DRAWING: S. FELLETER
☐ EDGES CHAMFERED.		DATE: 08/05/26	SCALE: NTS
☐ ALL PATCHWORK ACCEPTABLE.		QC CHECK INITIALS:	PG. 1 of 1