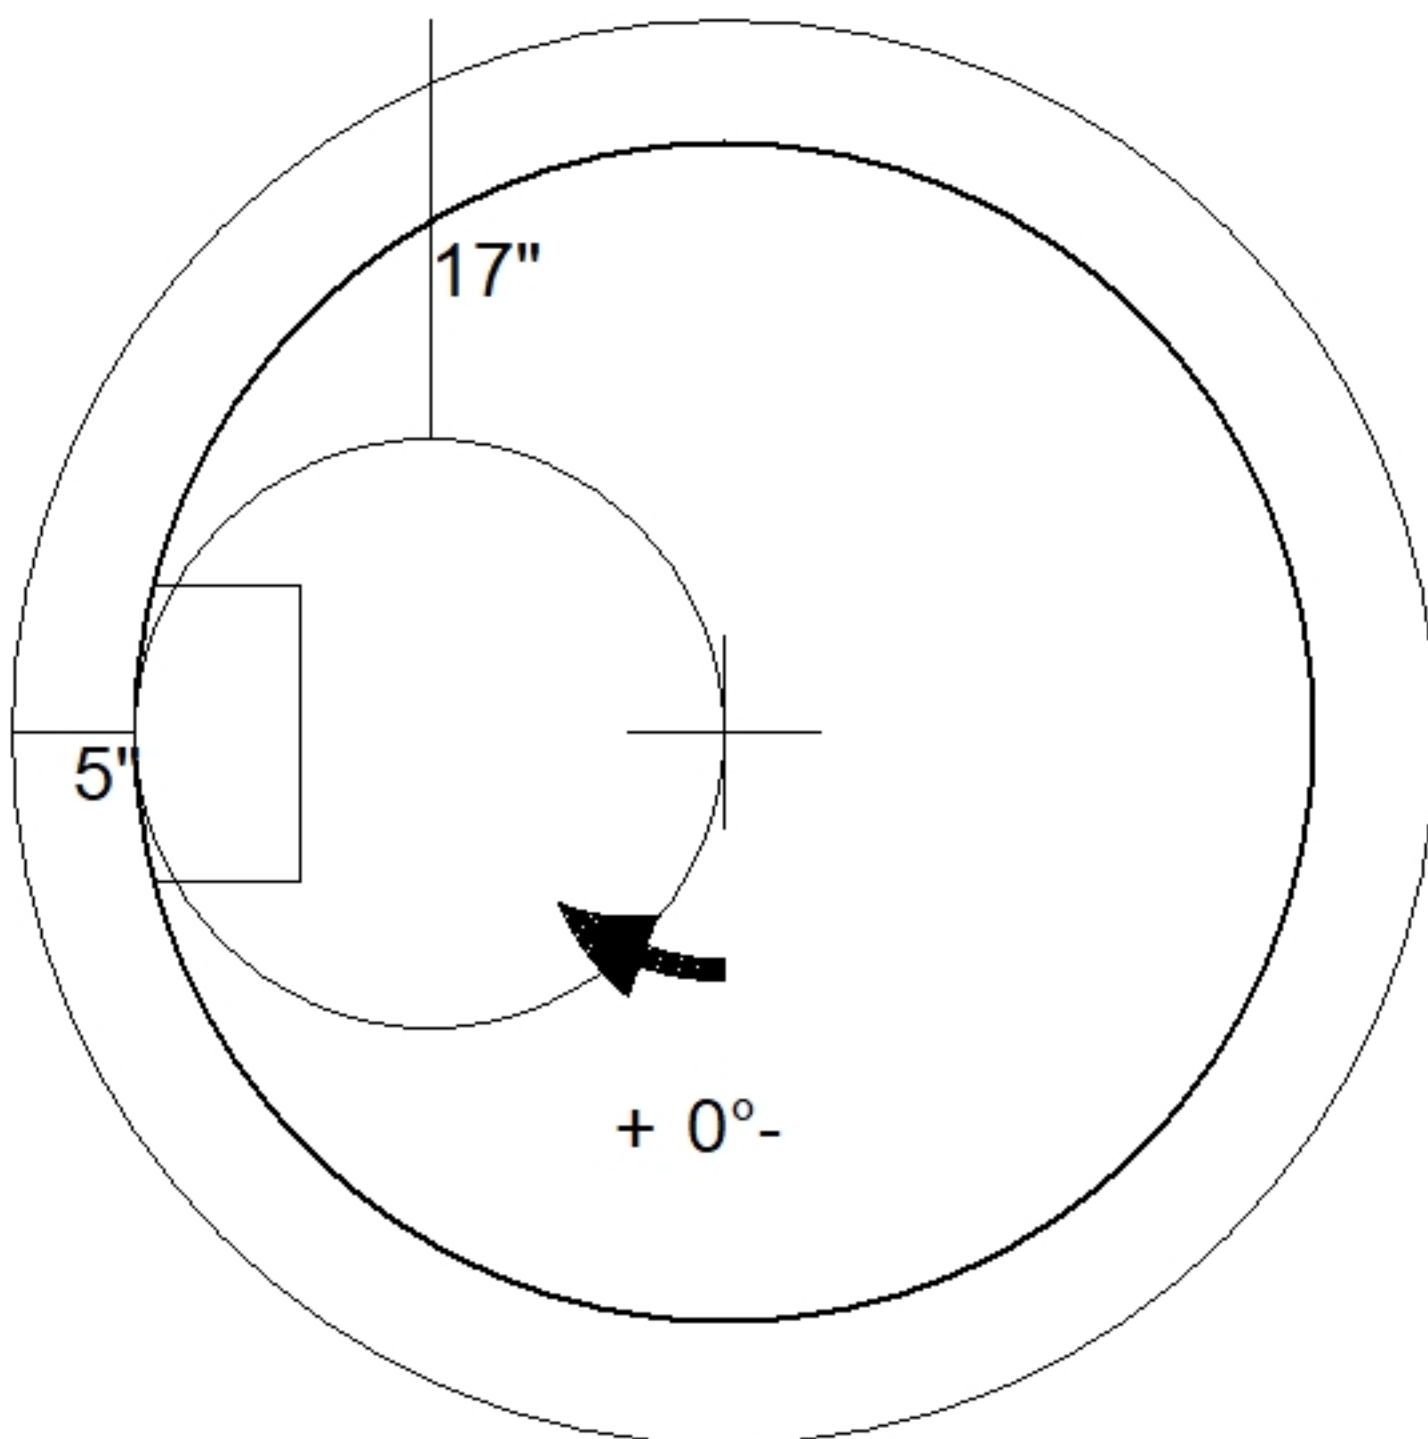
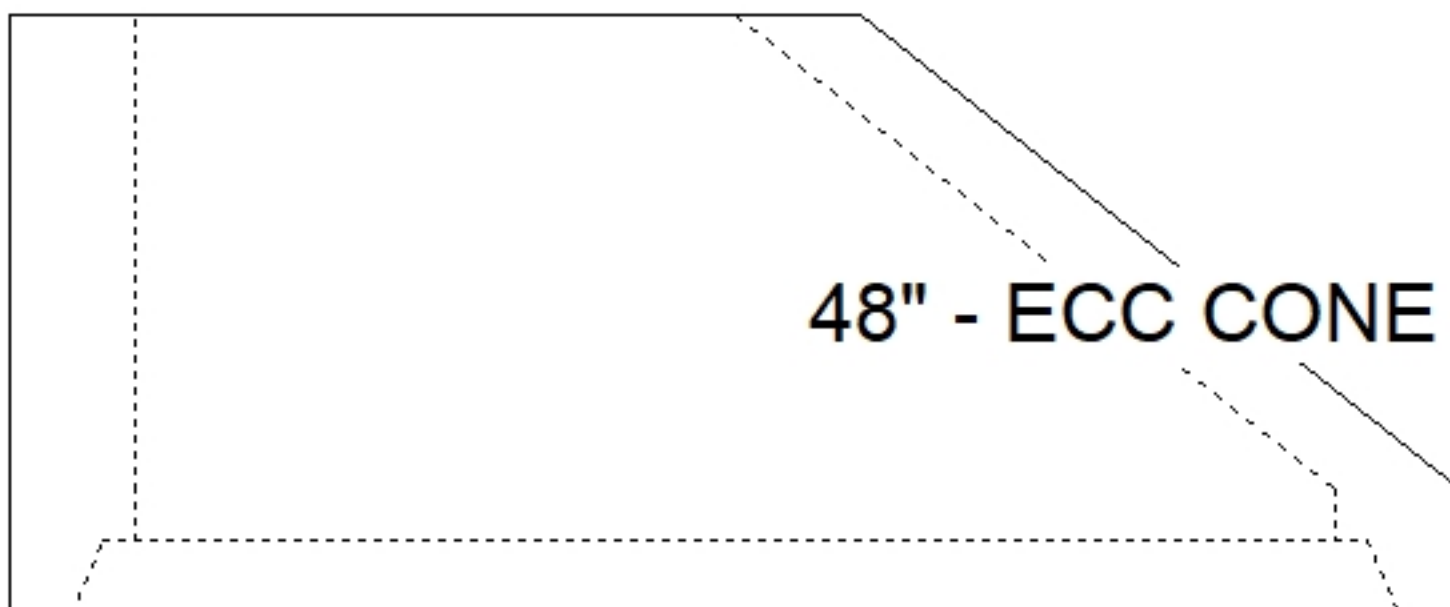


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)		Plant: Beaver Dam	Tech: J. Horsley	
Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC		8/3/2026 4:24:36 PM	PC: C. Goff	
Structure ID: MH278 (440+75 RT)				
P3 MH048CN24		ECC CONE w/ 24" HOLE F/G		
P4) 24" - CASTING HEIGHT - 8" P3) 48" - ECC CONE w/ 24" HOLE F/G - 24" P2) 48" x 48" - CB FT REDUCER 48" HOLE T/F - 8" P1) 48" x 48" - BX BASE w/FLANGE 08W/12F/08EF F/n - 54" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 48" x 48" - Conseal CS-102 1.00" 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 44 1) Hole - 20 8) MH Step ML-10-TDS-NCR - 10"		0 lb 1550 lb 1535 lb 12312 lb 421 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 15818 lb	<u>Structure Notes:</u> . ** KYTC STATE PROJECT** 1. PER KYTC MANHOLE TYPE C / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-510 F/C) 4. SECONDARY POUR REQ'D FOR EXTENDED FLANGE (8"WD x 12" THICK). REINFORCING PER ASTM A615 (GRADE 60). . - TRANS. SLAB #5's AT 6" C.C.E.W (DBL MAT). - WALLS #5's AT 6" C.C.E.W. - FLOOR #5's AT 12" C.C.E.W..	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd