

**Structure ID: CB4**

**P1 BX3636-08BAVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

- P2) 36" x 36" - CASTING HEIGHT - 3"
- P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 48"
- 1) 36" x 36" - Conseal CS-102 1.00"
- 1) Hole - 38
- 1) Hole - 30
- 1) Hole - 20

0 lb  
 6230 lb  
 0 lb  
 0 lb  
 0 lb  
 0 lb  
 0 lb  
 Structure Total: 6230 lb



- Structure Notes:**
1. PER ASTM C-913 SPECIFICATIONS
  2. CONCRETE: 4,000 PSI AT 28 DAYS
  3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
  4. NO STEPS AND NO INVERT CHANNEL
  5. CASTING SUPPLIED BY OTHERS (HOE 595 FRAME & GRATE)

Rim: 702.92'    Rim to Invert: 4.33'    Slack: 0.96"    Sump: 0"    Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	698.59'	0°	26"	30" HDPE	35.1"	Hole 38	38"	37"	-2.55"	0"
Invert 2	698.59'	90°	26"	24" HDPE	27.8"	Hole 30	30"	30"	-1.9"	0"
Invert 3	698.59'	180°	26"	15" HDPE	17.6"	Hole 20	20"	20"	-1.3"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)



INSIDE WALL DIMENSIONS

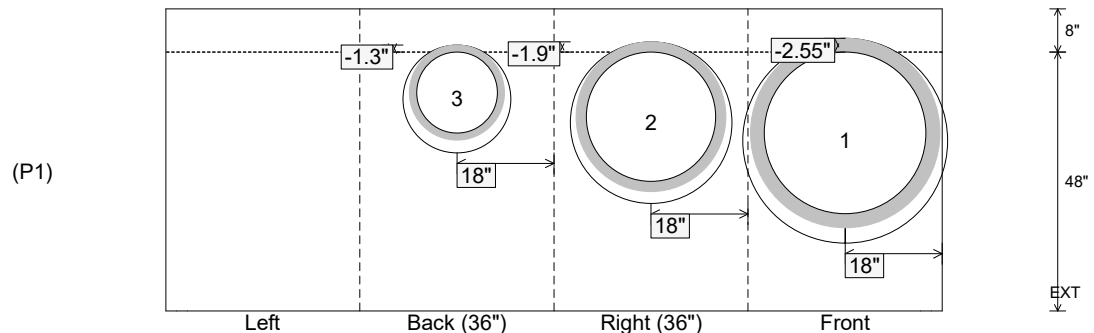

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 48" Height (Ext): 56"	Weight (Net): 6230 lb Volume (Net): 1.59cu.yd
----------------------------------	-------------------------------	--	--	--