

**Structure ID: C11**

**P1 BX2436-08BVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

P2) 24" x 36" - CASTING HEIGHT - 6"  
 P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 38"  
 1) 24" x 36" - Conseal CS-102 1.00"  
 1) Hole - 26  
 1) Hole - 24

0 lb  
 4594 lb  
 0 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 4594 lb



**Structure Notes:**  
 1. PER ASTM C-913 SPECIFICATIONS  
 2. CONCRETE: 4,000 PSI AT 28 DAYS  
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)  
 4. NO STEPS AND NO INVERT CHANNEL  
 5. CASTING SUPPLIED BY OTHERS (HOE 470 FRAME, GRATE, & CURB HOOD)

Rim: 703.77'    Rim to Invert: 3.7'    Slack: 0.4"    Sump: 0"    Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	700.07'	270°	26"	18" RCP B WALL	23"	Hole 26	26"	26"	-2.5"	0"
Invert 2	700.07'	110°	29.023"	18" HDPE	21.2"	Hole 24	24"	25.54"	-1.6"	-4"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

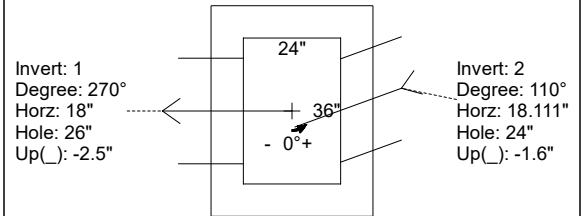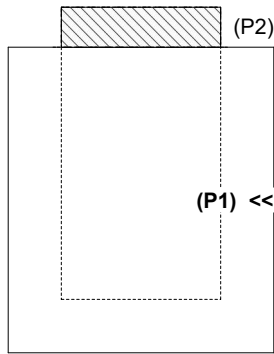

INSIDE WALL DIMENSIONS

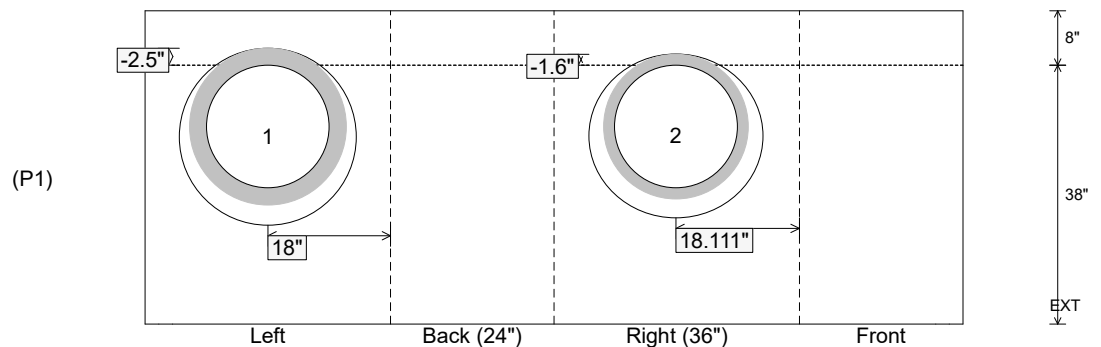

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 38" Height (Ext): 46"	Weight (Net): 4594 lb Volume (Net): 1.17cu.yd
----------------------------------	-------------------------------	--	--	--