

Structure ID: OS

P1 BX3636-08BA60

BOX BASE 8inW, 8inF F/n



P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 60" 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 44 1) Weir (Trapezoid) n/n - 3"x55"x31.1"	0 lb 8028 lb 0 lb 0 lb 0 lb ----- 8028 lb	Structure Notes: 1. PER ASTM C-913 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STEPS AND NO INVERT CHANNEL 5. CASTING SUPPLIED BY OTHERS (HOE 595 FRAME & GRATE)
Structure Total: 8028 lb		

Rim: 698.5' Rim to Invert: 5.35' Slack: 1.2" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (↓)	Offset
Invert 1	693.15'	90°	26"	36" HDPE	41.7"	Hole 44	44"	40"	-2.85"	0"
Invert 2	693.15'	270°	26"	3" x 55" Weir (Trapezoid)	3" x 55"	Weir (Trapezoid) 3"x55"x31.1"	3" x 55"	3"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

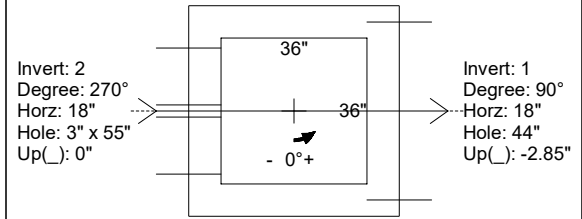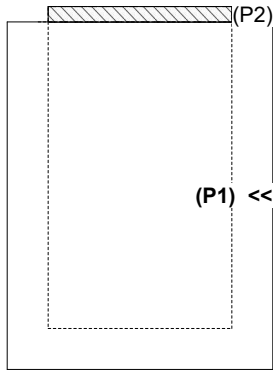

INSIDE WALL DIMENSIONS

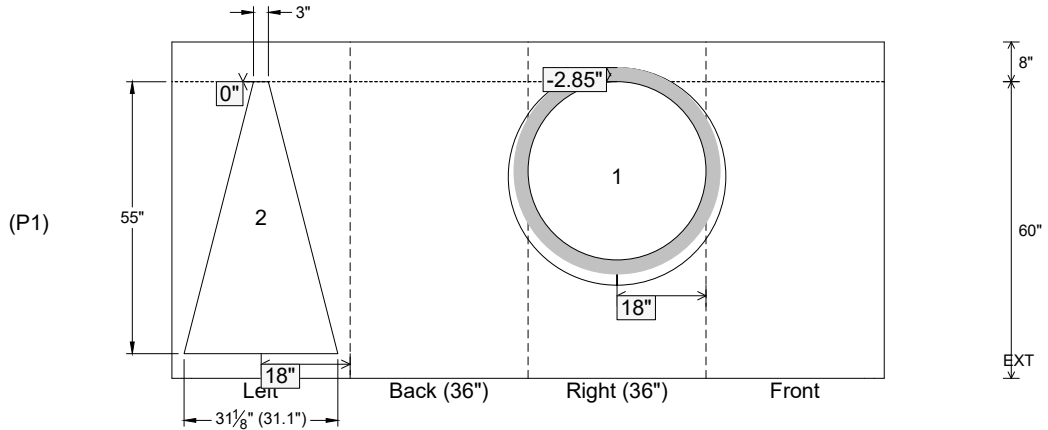

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 60" Height (Ext): 68"	Weight (Net): 8028 lb Volume (Net): 2.05cu.yd
----------------------------------	-------------------------------	--	--	--