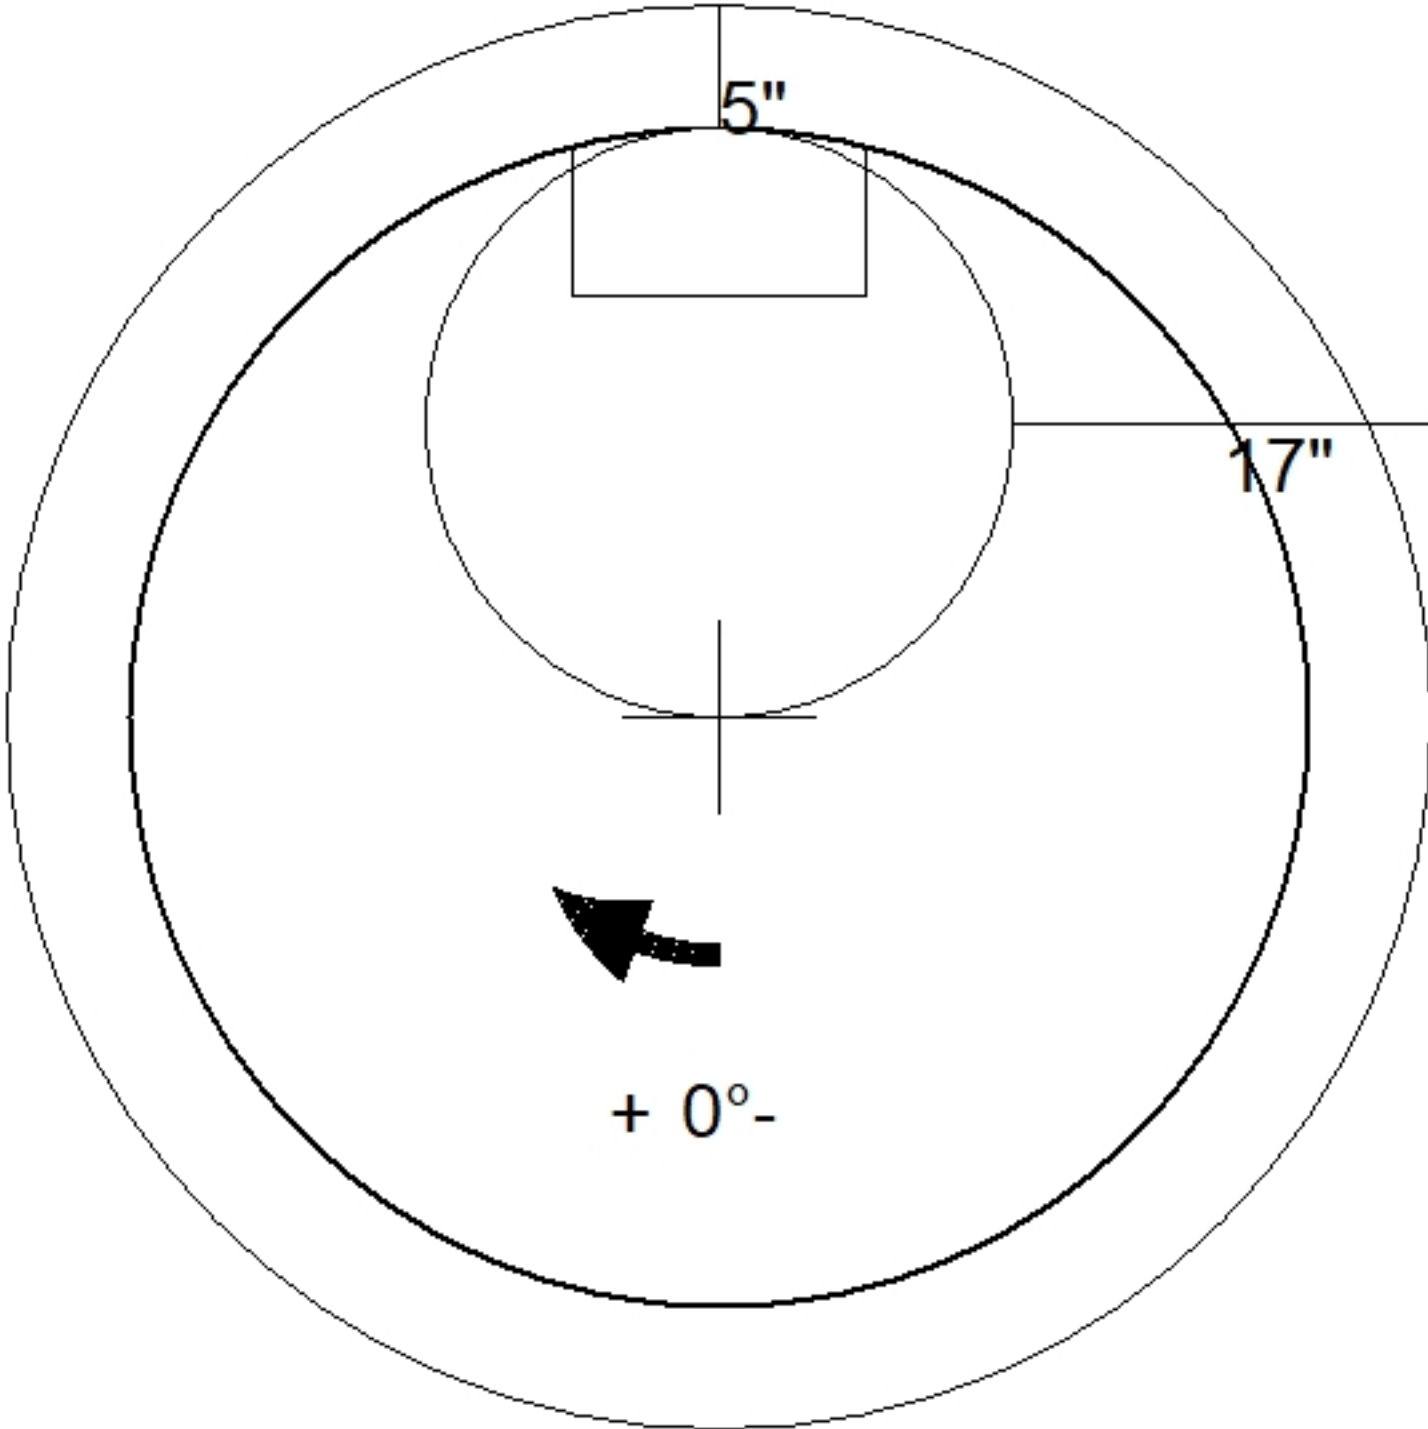
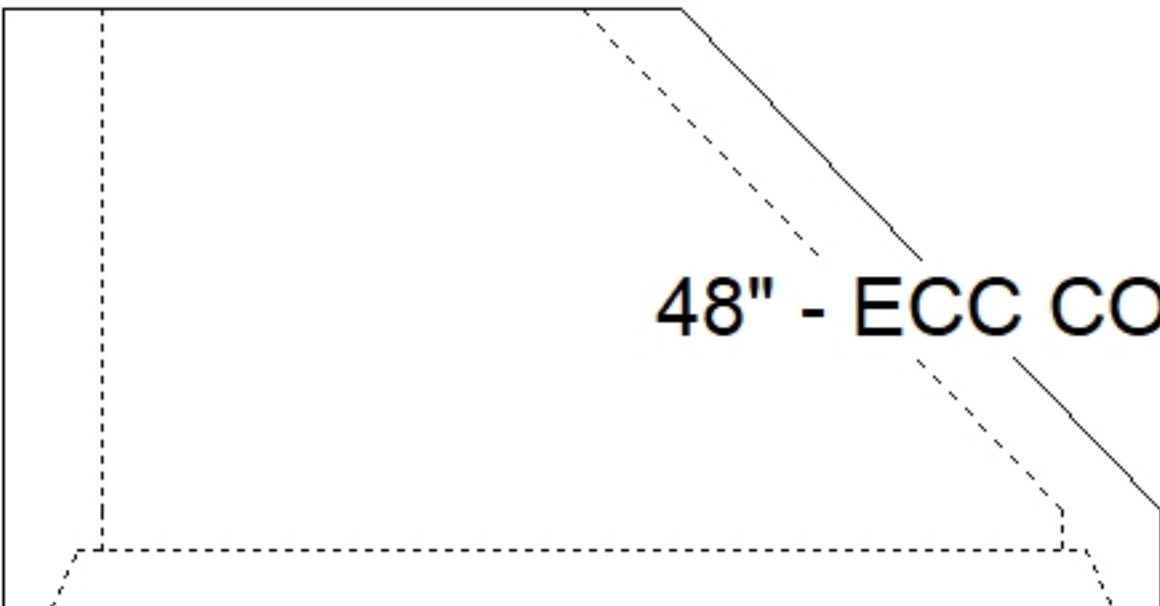


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC		Plant: Beaver Dam 8/3/2026 4:24:51 PM	Tech: J. Horsley PC: C. Goff		
Structure ID: MH295 (448+90 RT)					
P4 MH048CN30		ECC CONE w/ 24" HOLE F/G			
P5) 24" - CASTING HEIGHT - 8" P4) 48" - ECC CONE w/ 24" HOLE F/G - 30" P3) 48" - MH RISER T/G - 24" P2) 60" x 60" - CB FT REDUCER 48" HOLE T/F - 8" P1) 60" x 60" - BX BASE w/FLANGE 08W/12F/08EF F/n - 71" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 60" x 60" - Conseal CS-102 1.00" 2) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 56 2) I-Beam Notch n/n - 7"x9"x5" 12) MH Step ML-10-TDS-NCR - 10"		0 lb 2050 lb 1677 lb 2663 lb 18095 lb 421 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 24906 lb	Structure Notes: . ** KYTC STATE PROJECT** 1. PER KYTC MANHOLE TYPE C / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-510 F/G) 5. SECONDARY POUR REQ'D FOR EXTENDED FLANGE (8"WD x 12" THICK). . REINFORCING PER ASTM A615 (GRADE 60). - TRANS. SLAB #5's AT 6" C.C.E.W (DBL MAT). - WALLS #5's AT 6" C.C.E.W. - FLOOR #5's AT 12" C.C.E.W..		
					
 48" - ECC CONE w/ 24" HOLE F/G - 30" - (P4)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd