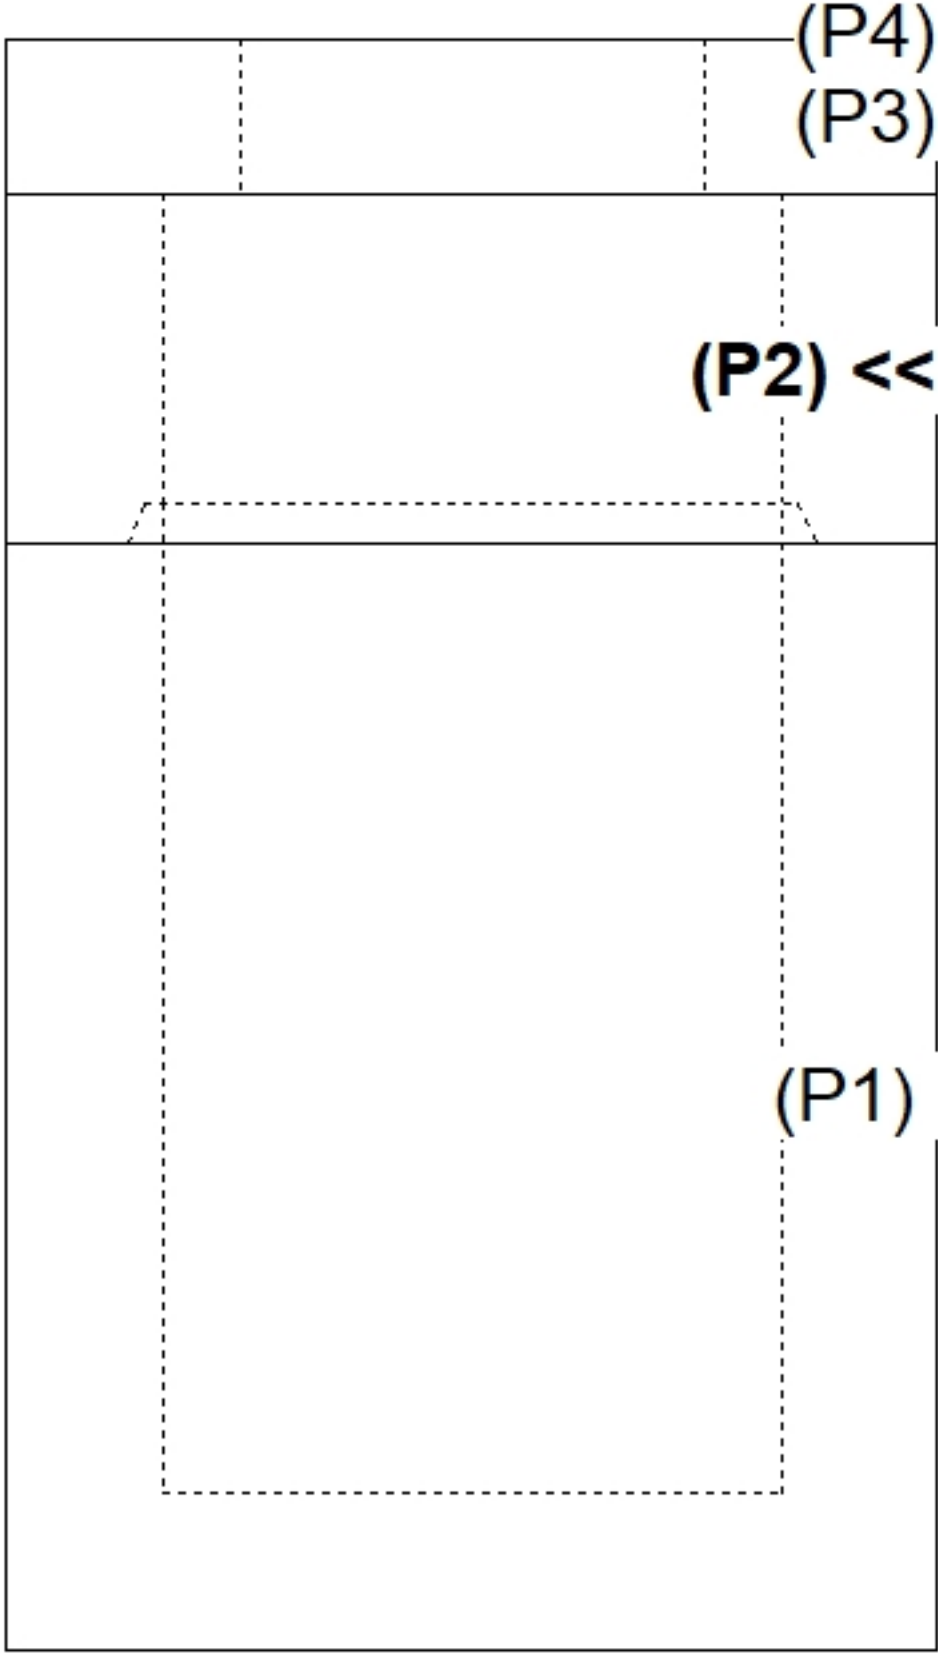
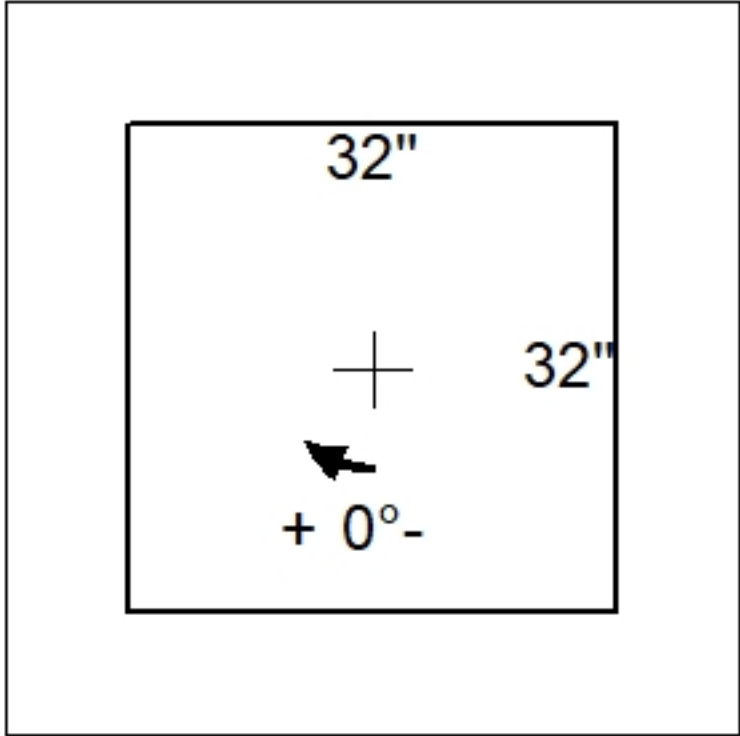
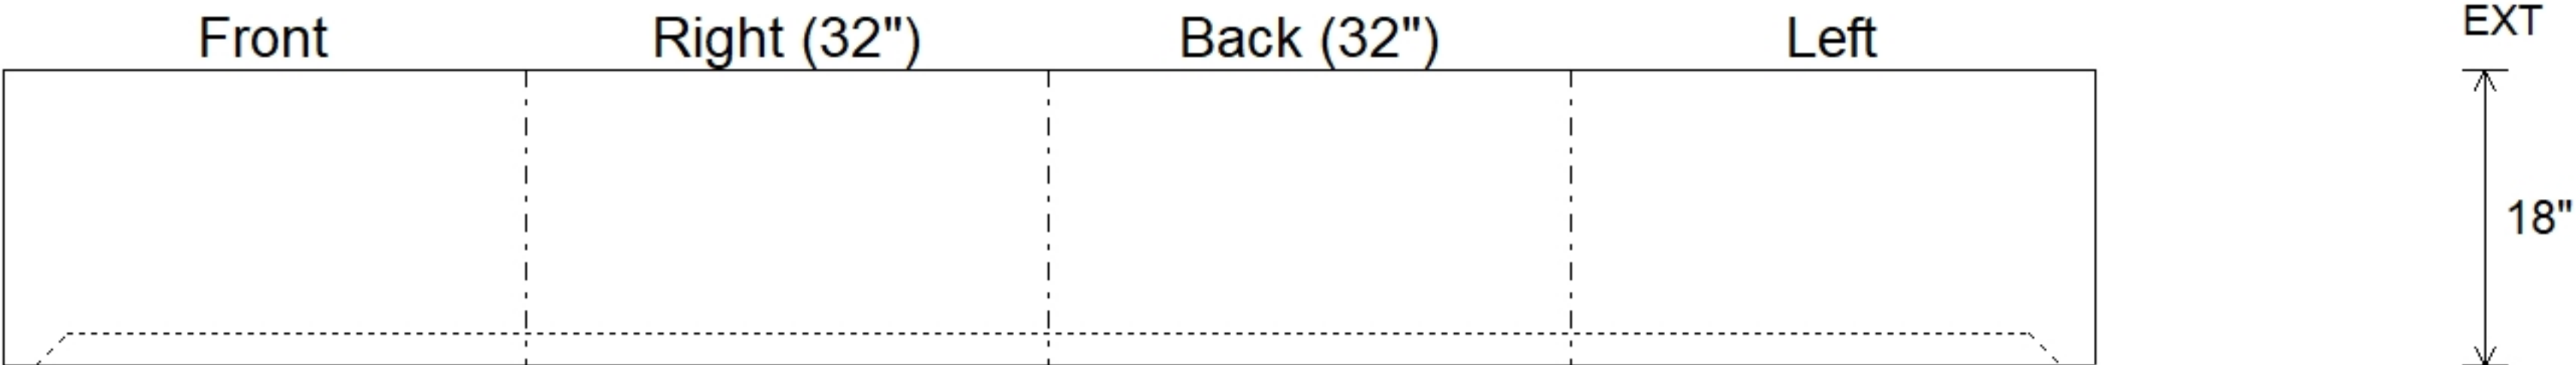


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 8/3/2026 4:28:43 PM		Tech: J. Horsley PC: C. Goff						
Structure ID: MH314 (455+32 RT)												
P2			BX3232-08R18			BOX RISER 8inW F/G						
P4) CASTING (cast in) - 0 P3) 32" x 32" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8" P2) 32" x 32" - BOX RISER 8inW F/G - 18" P1) 32" x 32" - BOX BASE 8inW, 8inF, Variable Ht T/n - 49" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) 32" x 32" - Conseal CS-102 1.00" 1) 32" x 32" - Conseal CS-102 1.50" 1) Hole - 30 1) Hole - 24						0 lb 1243 lb 1933 lb 6000 lb 206 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb		Structure Notes: . **KYTC STATE PROJECT** 1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12: C.C.E.W.				
Rim: 528.18' Rim to Invert: 6.28' Slack: 0.36" Sump: 0" Step Position:												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
(P2)												
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 18" Height (Ext): 18"		Weight (Net): 1933 lb Volume (Net): 0.49cu.yd		