

Structure ID: 10+49.22 LN 14

P1 MH048BA42

MH BASE T/n

P4) 24" x 36" - CASTING HEIGHT - 4" P3) 48" - MH FLAT TOP w/24"x36" Hole F/G - 12" P2) 48" - MH RISER T/G - 36" P1) 48" - MH BASE T/n - 42" 2) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 16" 6) MH Step ML-10-TDS-NCR - 10"	0 lb 1300 lb 2515 lb 4036 lb 0 lb 0 lb 0 lb 0 lb 0 lb 7851 lb
Structure Total: 7851 lb	

Structure Notes:



1. PER MSD CB TYPE 2 / ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: PER ASTM A615
4. NO INVERT CHANNEL
5. STEPS AT 270 DEGREES
6. CASTING SUPPLIED BY OTHERS

Rim: 790.18' Rim to Invert: 7.97' Slack: 2.89" Sump: 1.25" Step Position: 270°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	782.21'	0°	0"	12" HDPE	14.5"	Hole 16	16"	16.312"	0"	0"
Invert 2	782.21'	145°	73.391"	12" HDPE	14.5"	Hole 16	16"	16.312", 10.758"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

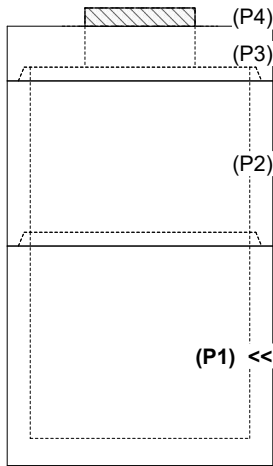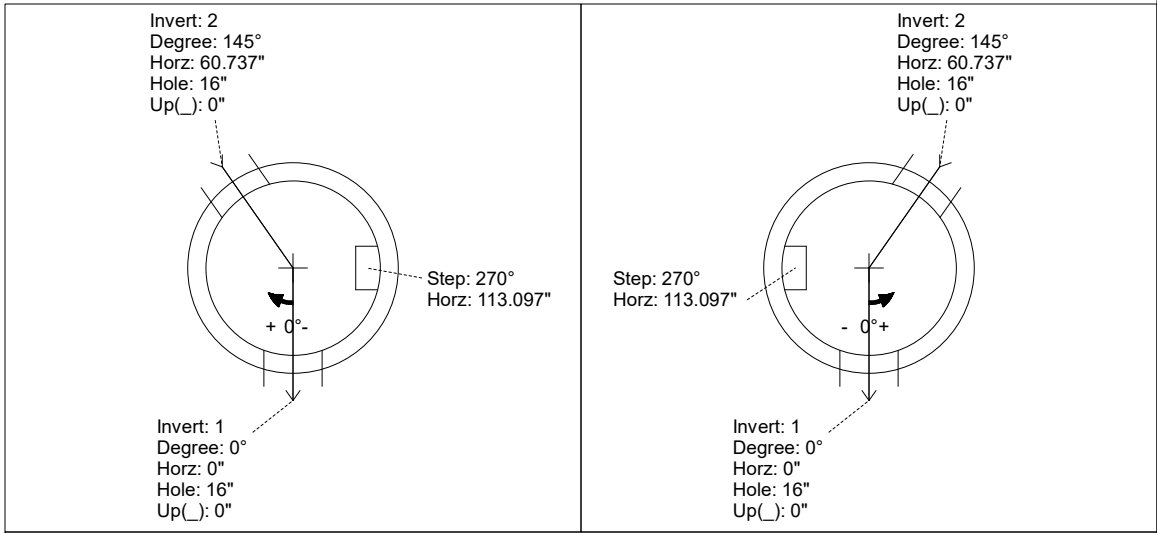

INSIDE WALL DIMENSIONS

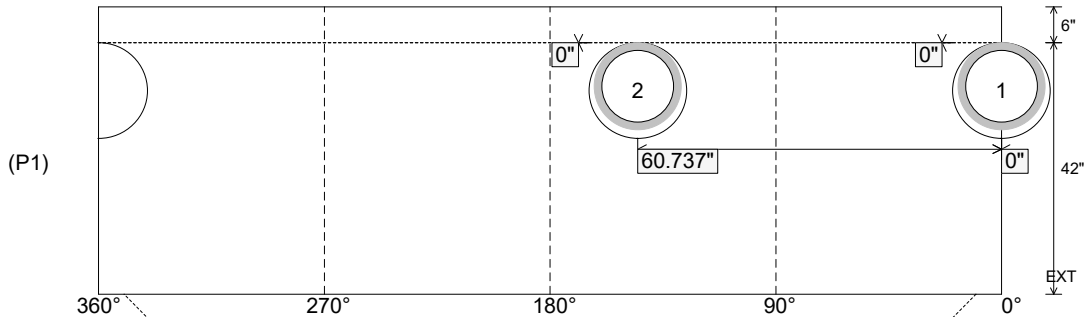

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 42" Height (Ext): 48"	Weight (Net): 4036 lb Volume (Net): 1.03cu.yd
----------------------------------	---------------------------------	--	--	--