

**Structure ID: 11+49.08 LN 6**

**P1 BX2424-08BAVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

- P2) 24" x 24" - CASTING HEIGHT - 3.50"
- P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 21"
- 1) 24" x 24" - Conseal CS-102 1.00"
- 1) DOGHOUSE INVRTD - 20"x22"
- 1) Hole - 16

0 lb  
 2448 lb  
 0 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 2448 lb



- Structure Notes:**
1. PER ASTM C-913 SPECIFICATIONS
  2. CONCRETE: 4,000 PSI AT 28 DAYS
  3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
  4. NO INVERT CHANNEL
  5. NO STEPS
  6. CASTING SUPPLIED BY OTHERS

Rim: 774.76'    Rim to Invert: 2.06'    Slack: 0.22"    Sump: 0"    Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	772.7'	25°	23.809"	15" HDPE	17.6"	DOGHOUSE INVRTD 20"x22"	20" x 22"	22.068"	-1.3"	-5"
Invert 2	772.7'	270°	20"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

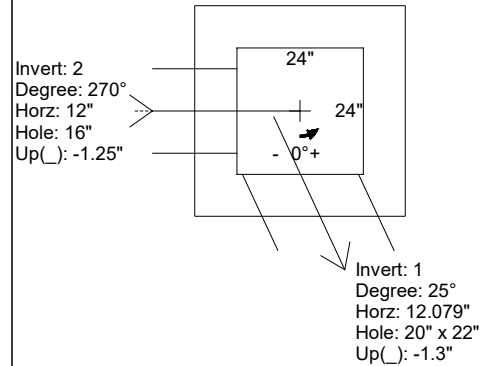

INSIDE WALL DIMENSIONS

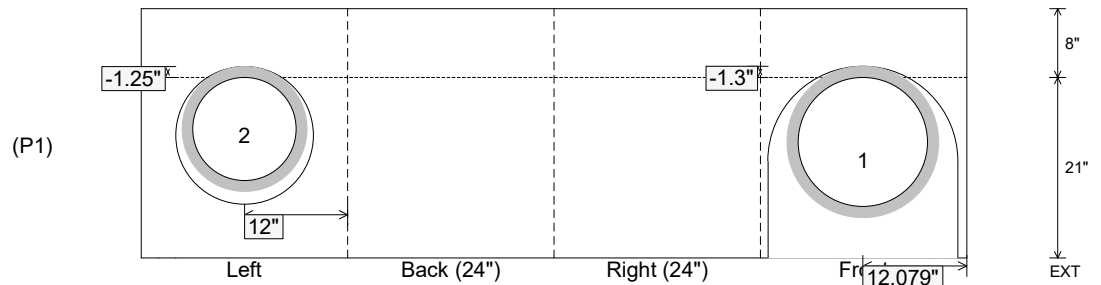

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 21" Height (Ext): 29"	Weight (Net): 2448 lb Volume (Net): 0.62cu.yd
----------------------------------	-------------------------------	--	--	--