

**Structure ID: 13+07.54 LN 9**

**P1 MH060BAVF**

**MH BASE Custom Ht T/n**

- P3) 24" x 44" - CASTING HEIGHT - 3.50"
- P2) 60" - MH FLAT TOP w/24"x44" Hole F/G - 13"
- P1) 60" - MH BASE Custom Ht T/n - 46"
- 1) 60" - Conseal CS-102 1.00"
- 2) Hole - 30
- 4) MH Step ML-10-TDS-NCR - 10"

0 lb  
 2347 lb  
 6795 lb  
 0 lb  
 0 lb  
 0 lb  
 -----  
 9142 lb

Structure Total: 9142 lb



- Structure Notes:**
1. PER ASTM C-478 SPECIFICATIONS
  2. CONCRETE: 4,000 PSI AT 28 DAYS
  3. REINFORCEMENT: PER ASTM A615
  4. NO INVERT CHANNEL
  5. STEPS AT 227 DEGREES
  6. CASTING SUPPLIED BY OTHERS

Rim: 783.01'    Rim to Invert: 5.29'    Slack: 0.98"    Sump: 0"    Step Position: 227°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	777.72'	0°	0"	24" HDPE	27.8"	Hole 30	30"	31.416"	-1.9"	0"
Invert 2	777.72'	94°	59.062"	24" HDPE	27.8"	Hole 30	30"	31.416"	-1.9"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)



INSIDE WALL DIMENSIONS

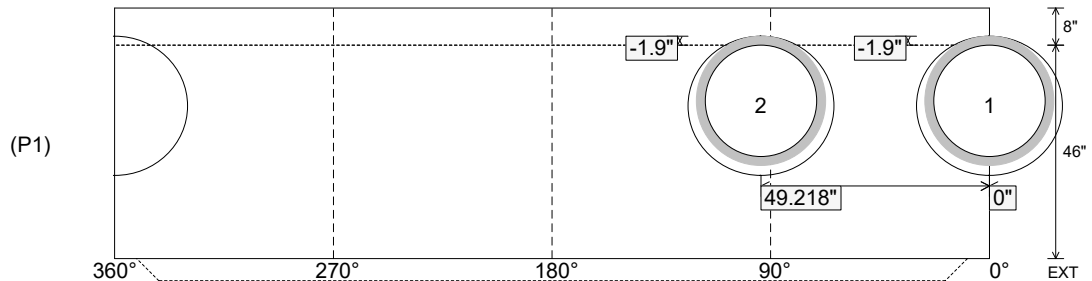

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 46" Height (Ext): 54"	Weight (Net): 6795 lb Volume (Net): 1.74cu.yd
----------------------------------	---------------------------------	--	--	--