

Structure ID: 15+50.15 LN 8

P1 BX3636-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n



P3) 18" x 18" - CASTING HEIGHT - 4" P2) 36" x 36" - BX FLAT LID 8inW w/18"x18" HOLE F/F - 6" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 26" 1) 36" x 36" - Conseal CS-102 1.00" 1) 18" x 18" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD (ELLIP) - 40"x29.50" 1) Hole - 24	0 lb 1198 lb 4029 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb	Structure Notes: 1. PER ASTM C-913 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO INVERT CHANNEL 5. NO STEPS 6. CASTING SUPPLIED BY OTHERS
Structure Total: 5227 lb		

Rim: 777.5' Rim to Invert: 3.07' Slack: 0.84" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	774.43'	0°	26"	30" x 19" ELL RCP	37.375" x 26.437"	DOGHOUSE INVRTD (ELLIP) 40"x29.50"	40" x 29.5"	38"	-3.719"	0"
Invert 2	774.43'	110°	30.142"	18" HDPE	21.2"	Hole 24	24"	25.54"	-1.6"	-5"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

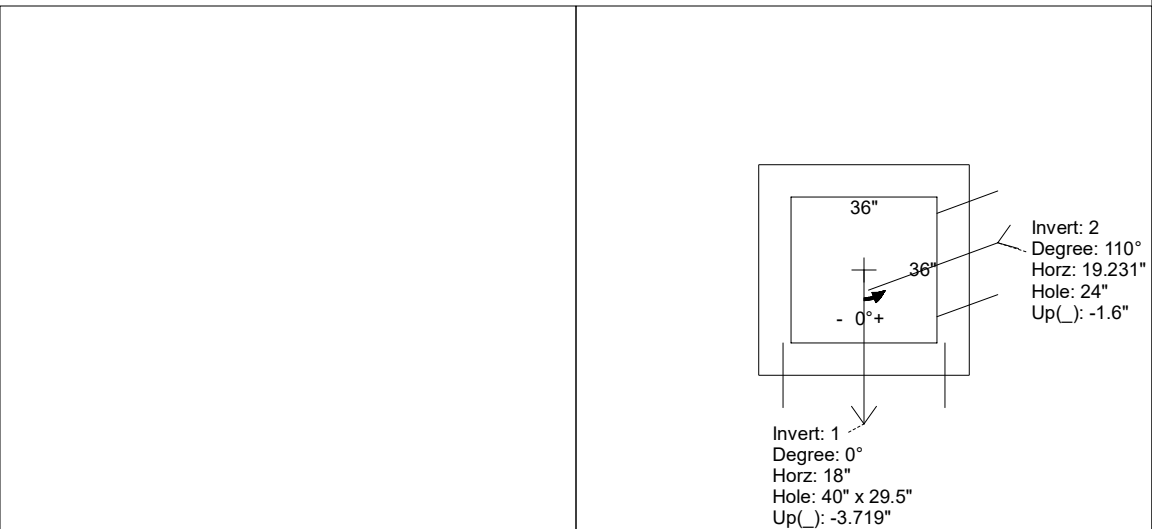

INSIDE WALL DIMENSIONS

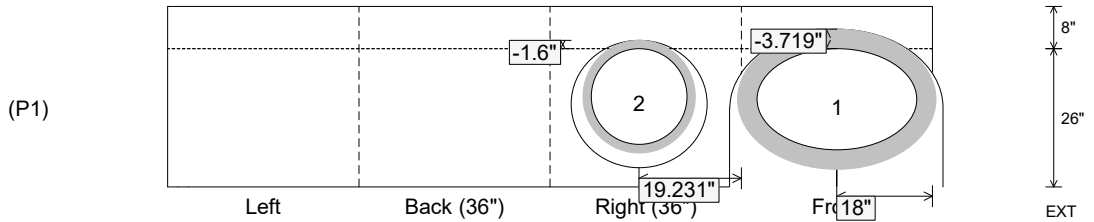

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 26" Height (Ext): 34"	Weight (Net): 4029 lb Volume (Net): 1.03cu.yd
----------------------------------	-------------------------------	--	--	--