

Structure ID: 18+59.96 LN 9

P1 BX3648-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n



P3) 24" x 44" - CASTING HEIGHT - 3.50" P2) 36" x 48" - CB FLAT TOP 8"W w/24"x44" HOLE F/F - 6" P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 25" 1) 36" x 48" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD (ELLIP) - 40"x28.50" 1) Hole - 20 1) Hole - 16	0 lb 1144 lb 4556 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 5700 lb	Structure Notes: 1. PER ASTM C-913 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO INVERT CHANNEL 5. NO STEPS 6. CASTING SUPPLIED BY OTHERS
---	---	---

Rim: 783.14' Rim to Invert: 2.94' Slack: 0.78" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	780.2'	90°	32"	30" x 19" ELL RCP	37.375" x 26.437"	DOGHOUSE INVRTD (ELLIP) 40"x28.50"	40" x 28.5"	40"	-3.719"	0"
Invert 2	780.2'	270°	32"	15" HDPE	17.6"	Hole 20	20"	20"	-1.3"	0"
Invert 3	780.2'	0°	26"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

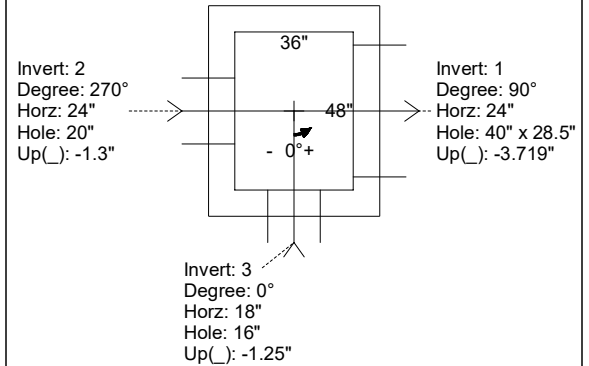

INSIDE WALL DIMENSIONS

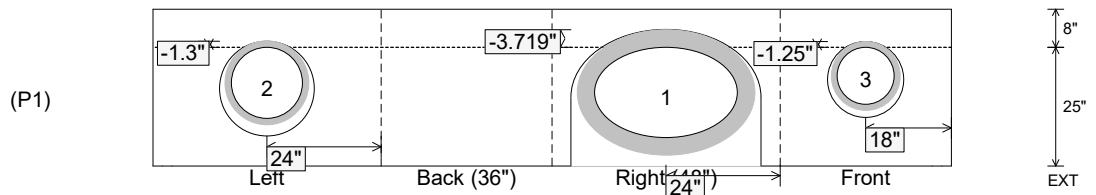

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 25" Height (Ext): 33"	Weight (Net): 4556 lb Volume (Net): 1.16cu.yd
----------------------------------	-------------------------------	--	--	--