

Structure ID: ST101

P1 MH060BA60

MH BASE T/n




P5) 24" - CASTING HEIGHT - 7" P4) 60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13" P3) 60" - MH RISER T/G - 48" P2) 60" - MH RISER T/G - 48" P1) 60" - MH BASE T/n - 60" 1) CASTING - JBS 1150 F/C STORM 3) 60" - Conseal CS-102 1.00" 2) Hole - 48 13) MH Step ML-10-TDS-NCR - 10"	0 lb 2869 lb 5011 lb 5011 lb 6943 lb 250 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 20084 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. NO STORM INVERT 5. STEPS AT 90 DEGREES 6. JBS 1150 FRAME & COVER "STORM" SUPPLIED BY ICAST
--	--	--

Rim: 419.26' Rim to Invert: 14.35' Slack: 0.2" Sump: 4" Step Position: 90°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	404.91'	0°	0"	36" RCP B WALL	44"	Hole 48	48"	55.638"	0"	0"
Invert 2	405.01'	180°	113.097"	36" RCP B WALL	44"	Hole 48	48"	55.638"	1.2"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

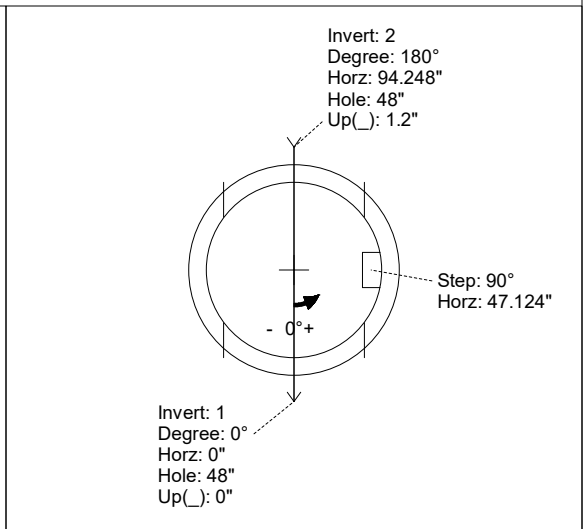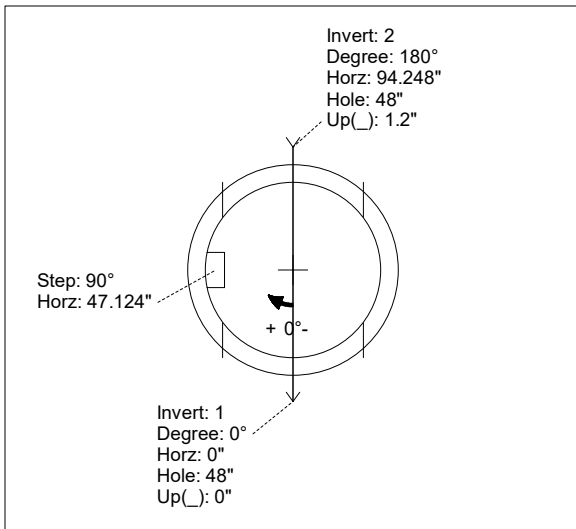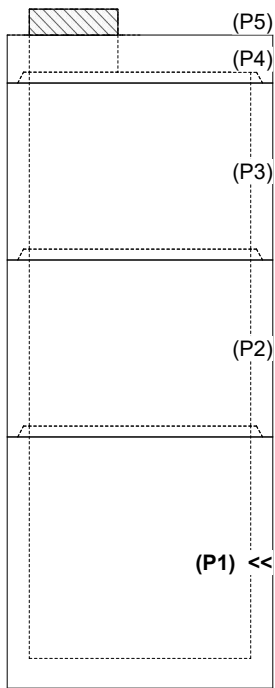

INSIDE WALL DIMENSIONS

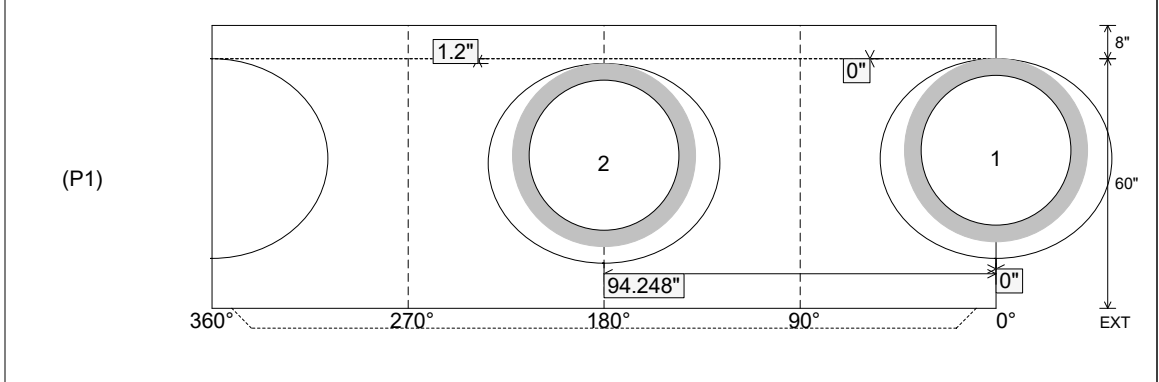

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 60" Height (Ext): 68"	Weight (Net): 6943 lb Volume (Net): 1.77cu.yd
----------------------------------	---------------------------------	--	--	--