

Job Name: 25-0199 - Countryview Stormwater Imp. Ph. 3 Sec. 1  
 Job Location: Henderson, KY 42420  
 Contractor: Koberstein Contracting, Inc.

Plant: Beaver Dam, KY  
 10/21/2025 8:33:36 AM

Tech: K. Cardwell  
 PC: E. Bradley



**Structure ID: 205**

**P1 BX2436-08BVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

- P2) 24" x 36" - CASTING HEIGHT - 4"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 32"
- 1) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 24
- 1) Hole - 20

0 lb  
 4133 lb  
 0 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 4133 lb



**Structure Notes:**  
 STATION: 3+64 LN B  
 1. PER ASTM C-913 SPECS  
 2. CONCRETE: 4,000 PSI AT 28 DAYS  
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)  
 4. 6" CASTING SUPPLIED BY OTHERS

Rim: 378.74' Rim to Invert: 3.21' Slack: 2.52" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	375.53'	270°	26"	18" ADS N-12	22"	Hole 24	24"	24"	-2"	0"
Invert 2	375.53'	70°	22.977"	15" ADS N-12	18"	Hole 20	20"	21.284"	-1.5"	4"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

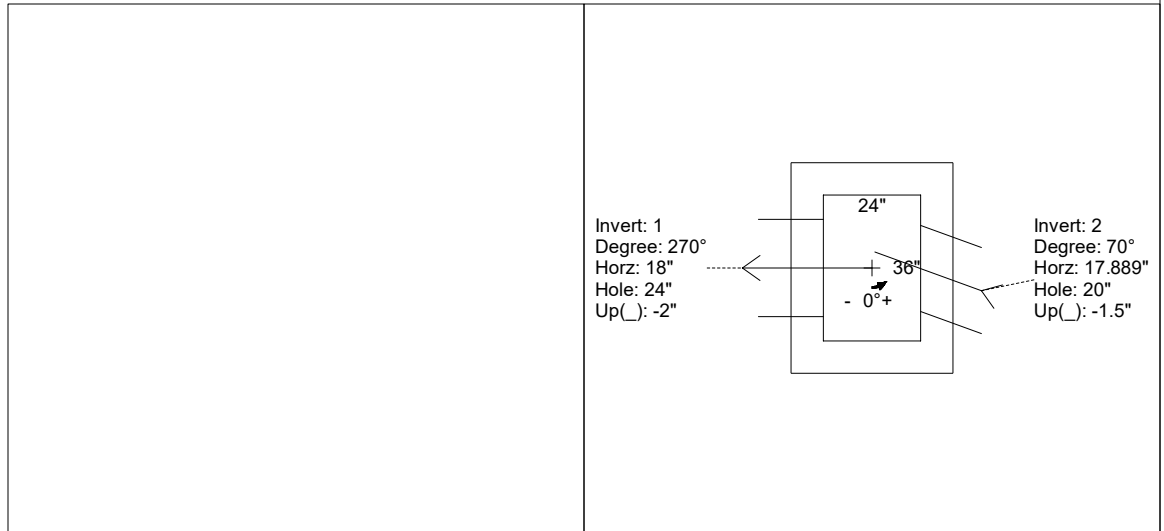

INSIDE WALL DIMENSIONS

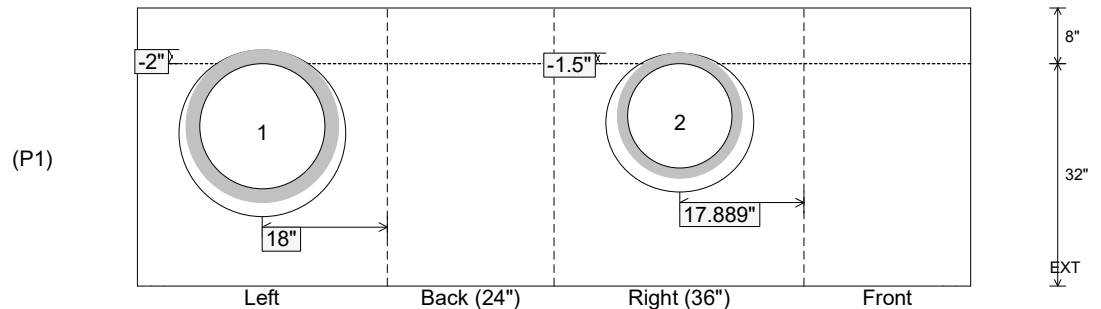

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: n/a

Wall Thickness: 8"  
 Floor Height: 8"

Height (Int): 32"  
 Height (Ext): 40"

Weight (Net): 4133 lb  
 Volume (Net): 1.06cu.yd