
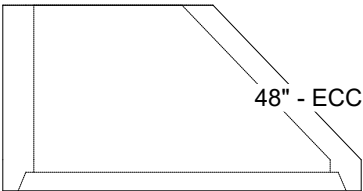


P7) 24" - CASTING HEIGHT - 7" P6) 48" - ECC CONE w/ 24" HOLE - 30" P5) 48" - MH RISER - 24" P4) 72" - MH Transition Slab 48" Hole - 15" P3) 72" - MH RISER Custom Ht - 61" P2) 72" - MH RISER - 72" P1) 72" - P.I.P. BY OTHERS - BTM SLAB - 0" 1) Chimney Seal - Cretex Chimney Seal 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-375-WT F/C Sanitary 3) 72" - Conseal CS-102 1.00" (Double) 2) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) DOGHOUSE - 28"x30" 1) Kor-N-Seal2 - S206-22 12) MH Step ML-10-TDS-NCR - 10"	<table> <tr><td>0 lb</td><td>Structure Notes: .</td></tr> <tr><td>2050 lb</td><td>1. PER ASTM C478 SPECIFICATIONS.</td></tr> <tr><td>1677 lb</td><td>2. CONCRETE = 4,000 PSI AT 28 DAYS.</td></tr> <tr><td>3864 lb</td><td>3. CASTING SUPPLIED BY I-CAST (HOE MC-375-WT F/C SANITARY).</td></tr> <tr><td>8666 lb</td><td>4. INTERNAL DROP INLET SUPPLIED BY OTHERS.</td></tr> <tr><td>9541 lb</td><td></td></tr> <tr><td>0 lb</td><td></td></tr> <tr><td>10 lb</td><td></td></tr> <tr><td>0 lb</td><td>REINFORCING PER ASTM A615 (GRADE 60).</td></tr> <tr><td>0 lb</td><td>- CONE (As .12)</td></tr> <tr><td>0 lb</td><td>- RISER/WALLS (As .12)</td></tr> <tr><td>271 lb</td><td>- TRANS.SLAB (As .31) #5 BARS AT 6" C.C.E.W.</td></tr> <tr><td>0 lb</td><td>- RISER/WALLS (As .18)</td></tr> <tr><td>0 lb</td><td></td></tr> <tr><td>0 lb</td><td></td></tr> <tr><td>0 lb</td><td></td></tr> <tr><td>6 lb</td><td></td></tr> <tr><td>0 lb</td><td></td></tr> <tr><td>0 lb</td><td></td></tr> </table>	0 lb	Structure Notes: .	2050 lb	1. PER ASTM C478 SPECIFICATIONS.	1677 lb	2. CONCRETE = 4,000 PSI AT 28 DAYS.	3864 lb	3. CASTING SUPPLIED BY I-CAST (HOE MC-375-WT F/C SANITARY).	8666 lb	4. INTERNAL DROP INLET SUPPLIED BY OTHERS.	9541 lb		0 lb		10 lb		0 lb	REINFORCING PER ASTM A615 (GRADE 60).	0 lb	- CONE (As .12)	0 lb	- RISER/WALLS (As .12)	271 lb	- TRANS.SLAB (As .31) #5 BARS AT 6" C.C.E.W.	0 lb	- RISER/WALLS (As .18)	0 lb		0 lb		0 lb		6 lb		0 lb		0 lb	
0 lb	Structure Notes: .																																						
2050 lb	1. PER ASTM C478 SPECIFICATIONS.																																						
1677 lb	2. CONCRETE = 4,000 PSI AT 28 DAYS.																																						
3864 lb	3. CASTING SUPPLIED BY I-CAST (HOE MC-375-WT F/C SANITARY).																																						
8666 lb	4. INTERNAL DROP INLET SUPPLIED BY OTHERS.																																						
9541 lb																																							
0 lb																																							
10 lb																																							
0 lb	REINFORCING PER ASTM A615 (GRADE 60).																																						
0 lb	- CONE (As .12)																																						
0 lb	- RISER/WALLS (As .12)																																						
271 lb	- TRANS.SLAB (As .31) #5 BARS AT 6" C.C.E.W.																																						
0 lb	- RISER/WALLS (As .18)																																						
0 lb																																							
0 lb																																							
0 lb																																							
6 lb																																							
0 lb																																							
0 lb																																							
Structure Total:	26086 lb																																						

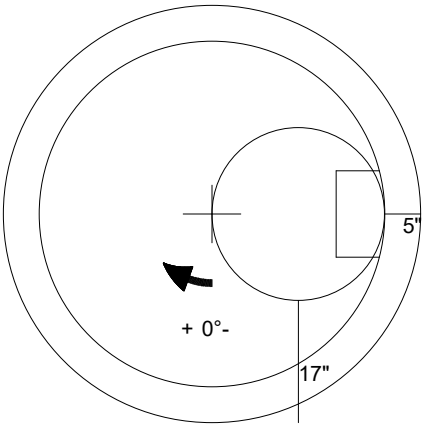

Coating (Int):	Seam Up: Flat	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb
Coating (Ext):	Seam Dn: Groove			Volume (Net): 0.41cu.yd