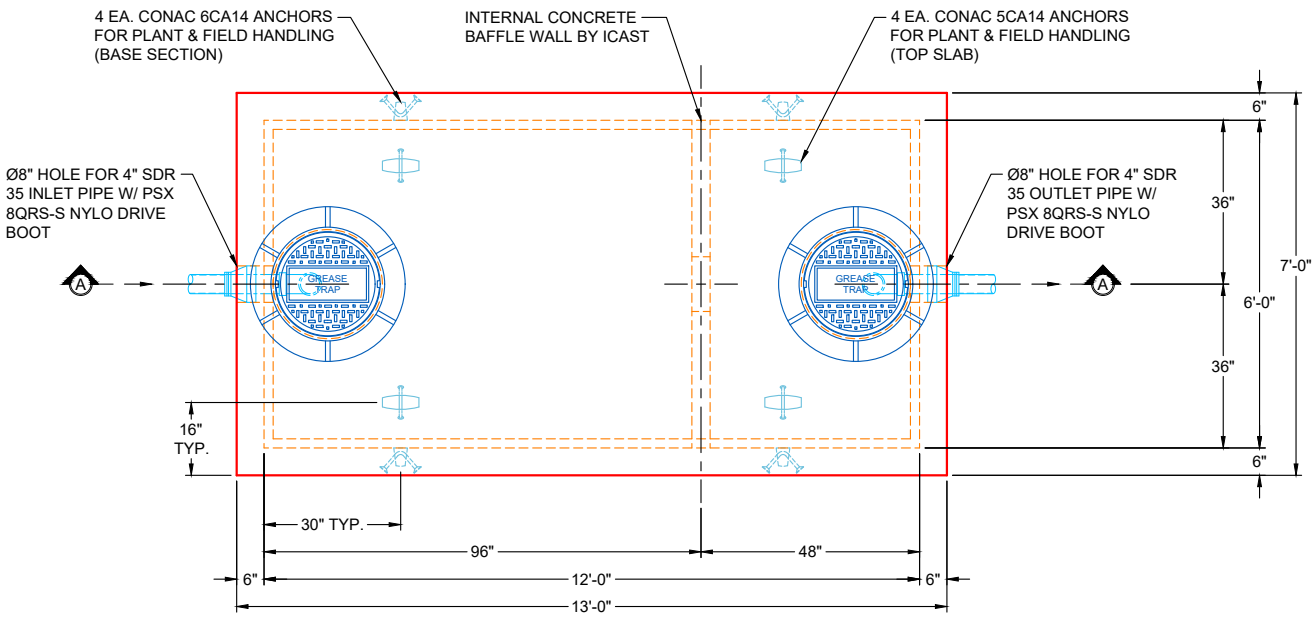

PLAN VIEW

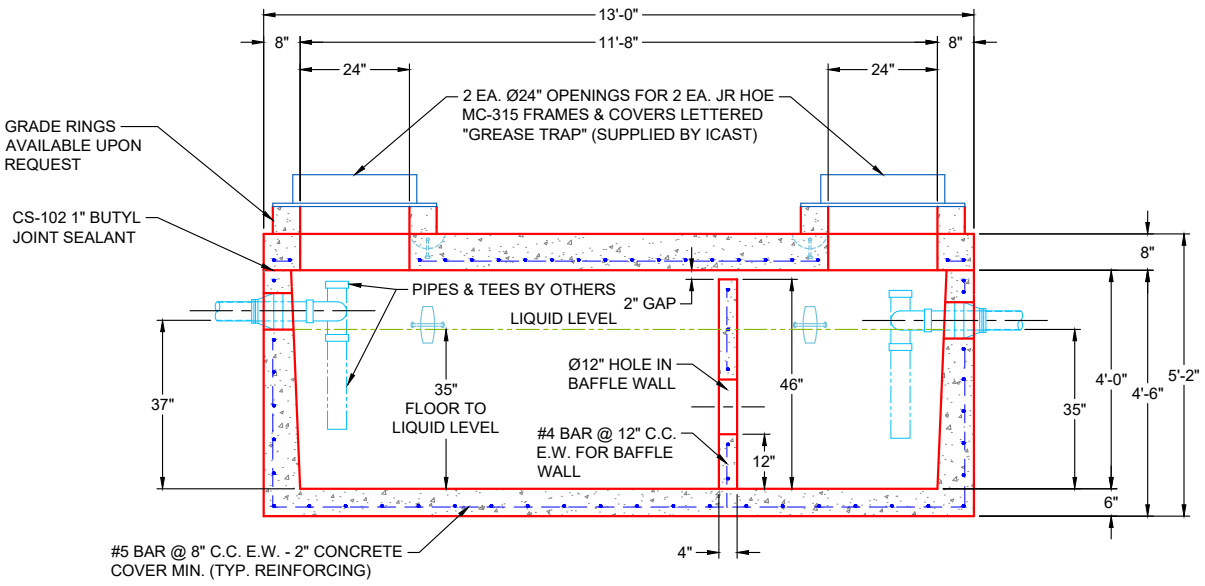

SECTION A-A

STRUCTURE NOTES:

1. MANUFACTURED PER ASTM C-890-13 LATEST REVISION
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCING PER ASTM A615 (GRADE 60)
4. SEALED PER ASTM C-990-09
5. GRADE RINGS BY REQUEST

WEIGHTS:

8" THICK TOP SLAB:	8,190 LBS
4'-0" TALL BASE W/ BAFFLE:	20,450 LBS
TOTAL WEIGHT:	28,640 LBS

REVISIONS	
REV. 0 DATE:	NO REVISIONS TO DATE

SUBMITTAL DRAWING: 12' X 6' GREASE TRAP (1,500 GAL.)	
CUSTOMER: AMERICAN CONTRACTING, LLC	
PROJECT: CASEY'S GENERAL STORE 4606	
STRUCTURE: 13-50230 (GREASE TRAP)	
SALES ORDER NO: 25-0230	
CHECKED BY: B. SMITH	DRAWN BY: K. CARDWELL
DATE: 12/22/25	SCALE: NTS / PG. 1 OF 1

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.