

**Structure ID: Str. 203 (5)**

**P3 MH048RS36SCDARED**



**MH RISER w/DROP/ConBlock-CDA Red T/G**

P5) 24" - CASTING HEIGHT - 7" P4) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 36" P3) 48" - MH RISER w/DROP/ConBlock-CDA Red T/G - 36" P2) 48" - MH RISER w/DROP/ConBlock-CDA Red T/G - 60" P1) 48" - MH BASE w/DROP/ConBlock-CDA Red T/n - 36" 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) ADMIXTURE CONBLOCK CDA RED 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-315 F/C Sanitary 3) 48" - Conseal CS-231 1.00" (Double) 1) PSX - 12M NYLO 1) Drop Elbow - 8" PVC 1) Drop Tee - 8" PVC	0 lb 2251 lb 2515 lb 4168 lb 3773 lb 1440 lb 0 lb 0 lb 0 lb 258 lb 0 lb 8 lb 0 lb 0 lb	<b>Structure Notes:</b> 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. CASTING BY ICAST (HOE MC-315 F/C). 5. 8" EXTERIOR DROP ASSEMBLY AT 135°. 6. NO STEPS.  REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
Structure Total:		14413 lb


Rim: 411.42'    Rim to Invert: 14.61'    Slack: 2.32"    Sump: 2"    Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

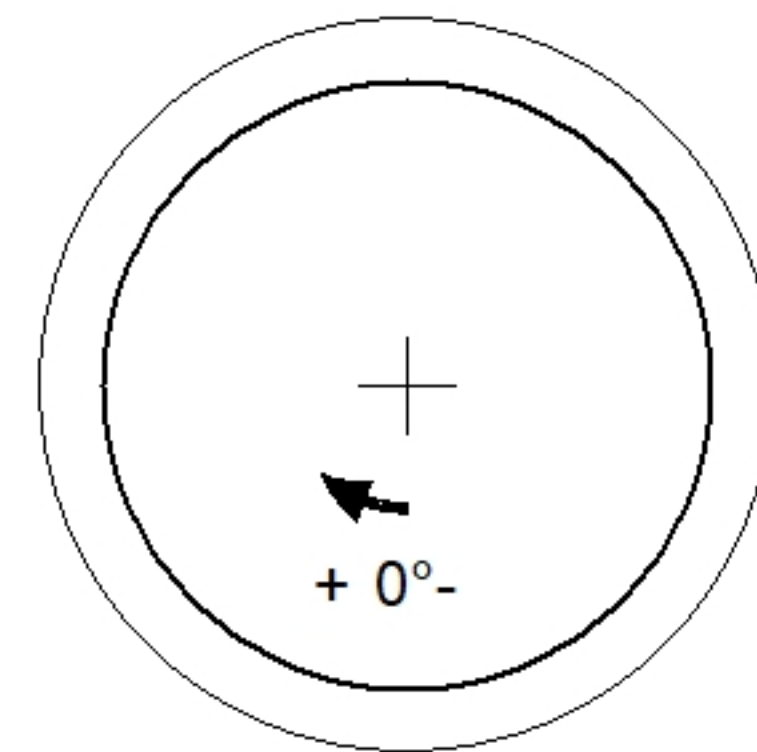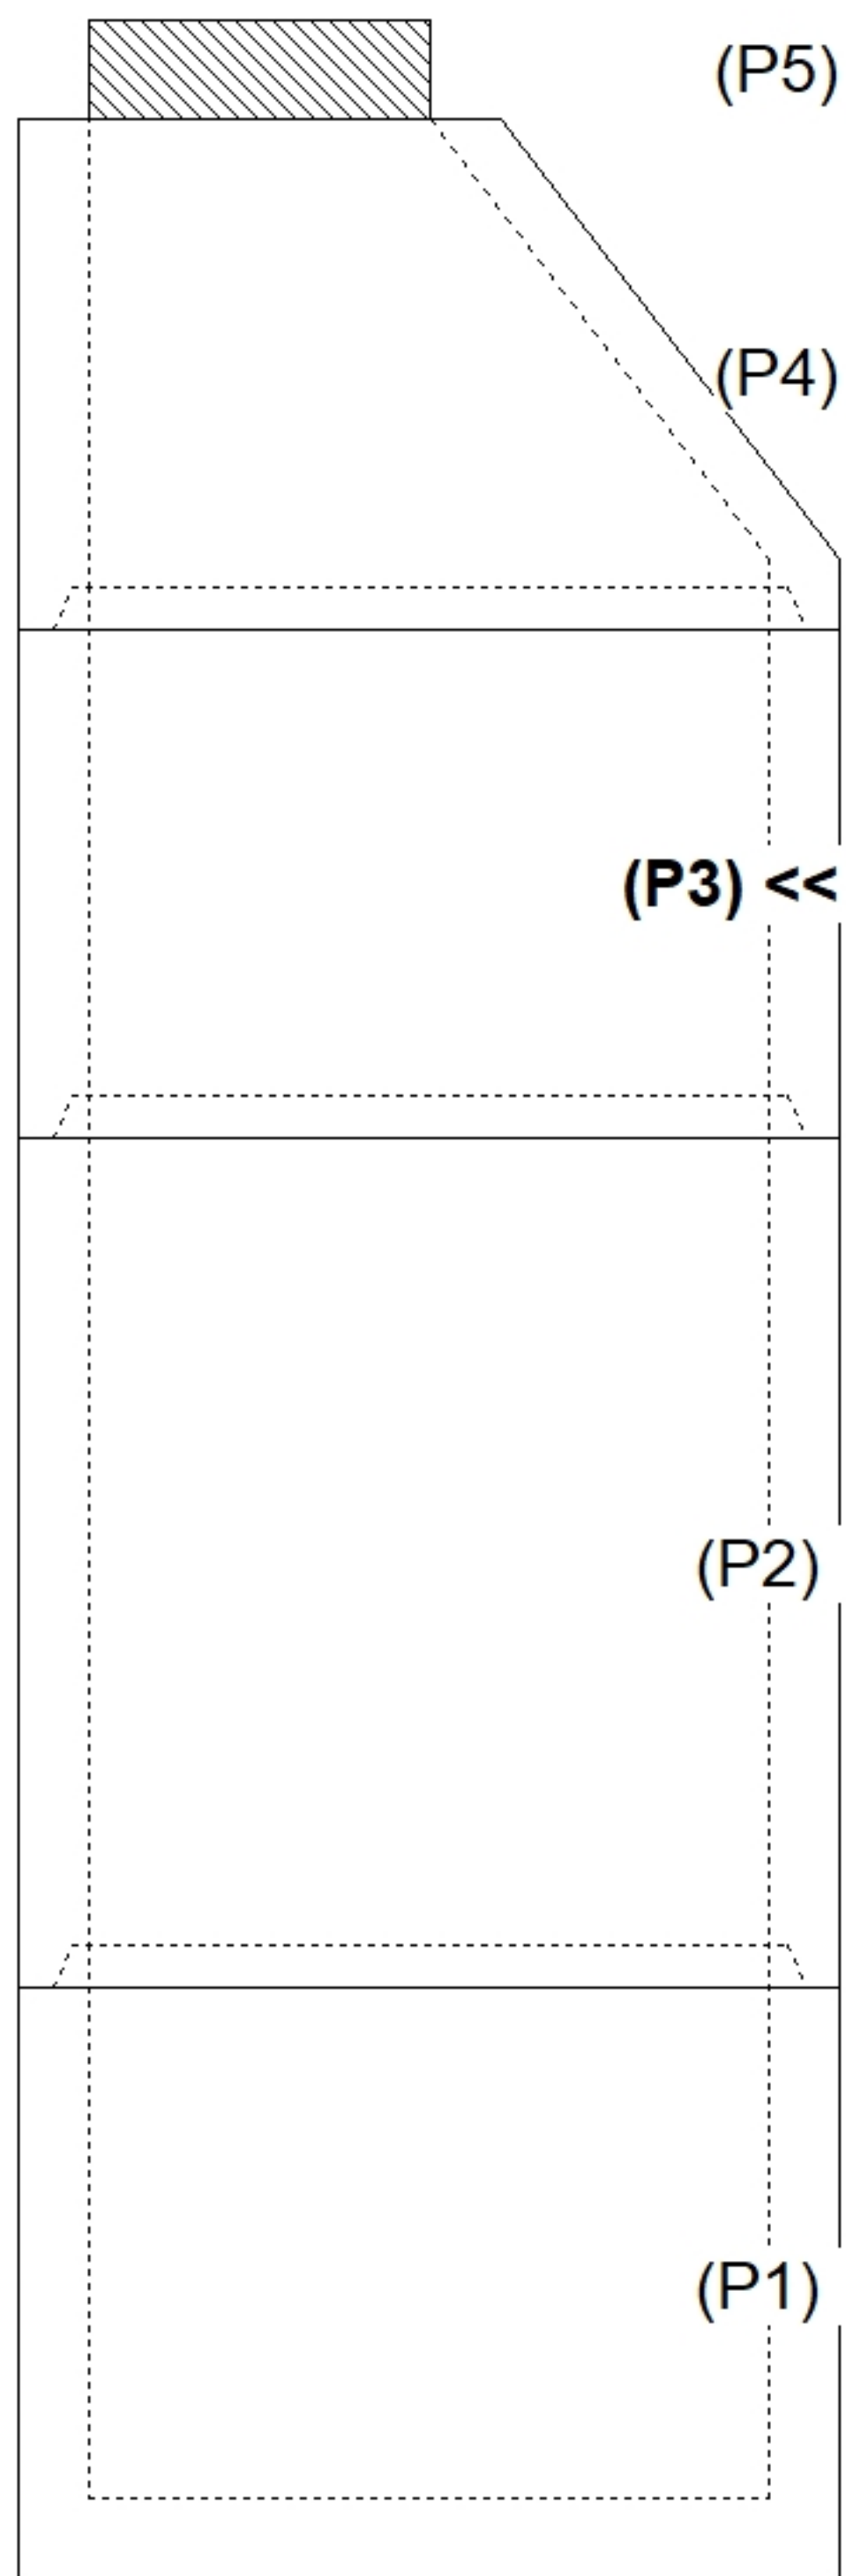

**INSIDE WALL DIMENSIONS**

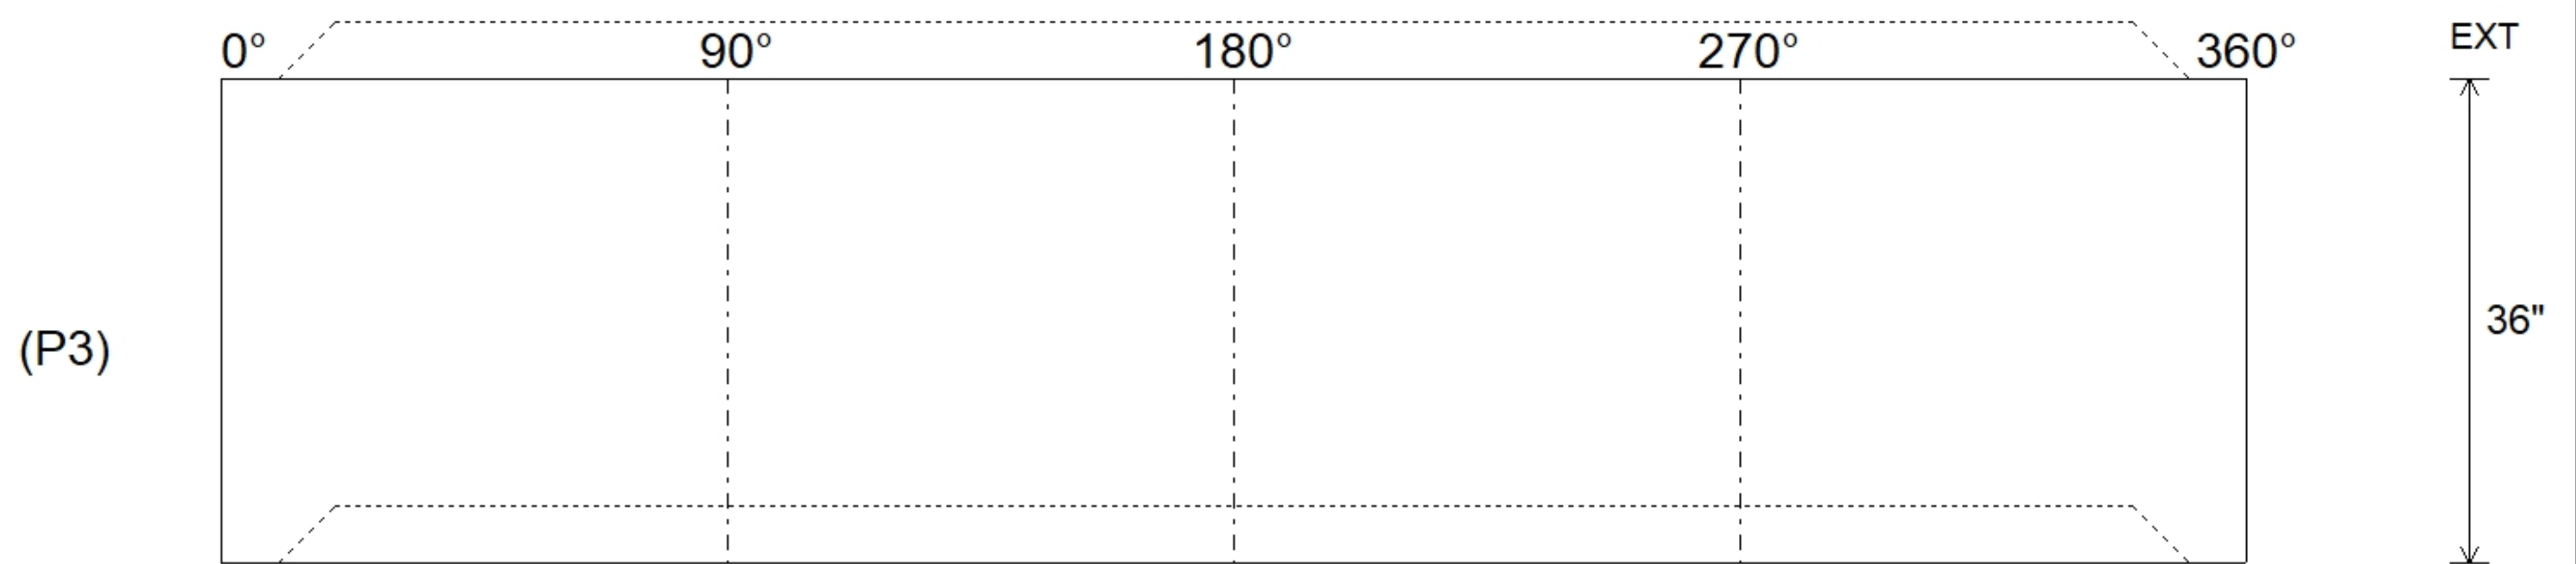

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"
Coating (Ext):			Weight (Net): 2515 lb Volume (Net): 0.64cu.yd