

**Structure ID: CB315 (7)**

**P2 MH060RS60**

**MH RISER T/G**

P4) 24" - CASTING HEIGHT - 7" P3) 60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13" P2) 60" - MH RISER T/G - 60" P1) 60" - MH BASE Custom Ht T/n - 70" 1) CASTING - HOE MCB-375-B F/Bar Grt 2) 60" - Hamilton Kent MH Gasket 1) Hole - 44 1) Hole - 30 1) Hole - 8 9) MH Step ML-10-TDS-NCR - 10"	0 lb 2869 lb 5868 lb 9199 lb 250 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 18186 lb
--	---



**Structure Notes:**  
 1. PER ASTM C478 SPECIFICATIONS.  
 2. CONCRETE = 4,000 PSI AT 28 DAYS.  
 3. CASTING HOE MCB-375-B BY ICAST.

REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..  
 - RISER/WALLS (As .18)  
 - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.


Rim: 908.49'    Rim to Invert: 10.55'    Slack: 0.6"    Sump: 24"    Step Position: 104°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1										
Invert 2	902.19'	208°	130.69"	24" ADS N-12	28"	Hole 30	30"	31.416"	-1.75"	0"
Invert 3	905.74'	280°	175.929"	6" HDPE (perf pipe)	6.9"	Hole 8	8"	8.024"	42.4"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

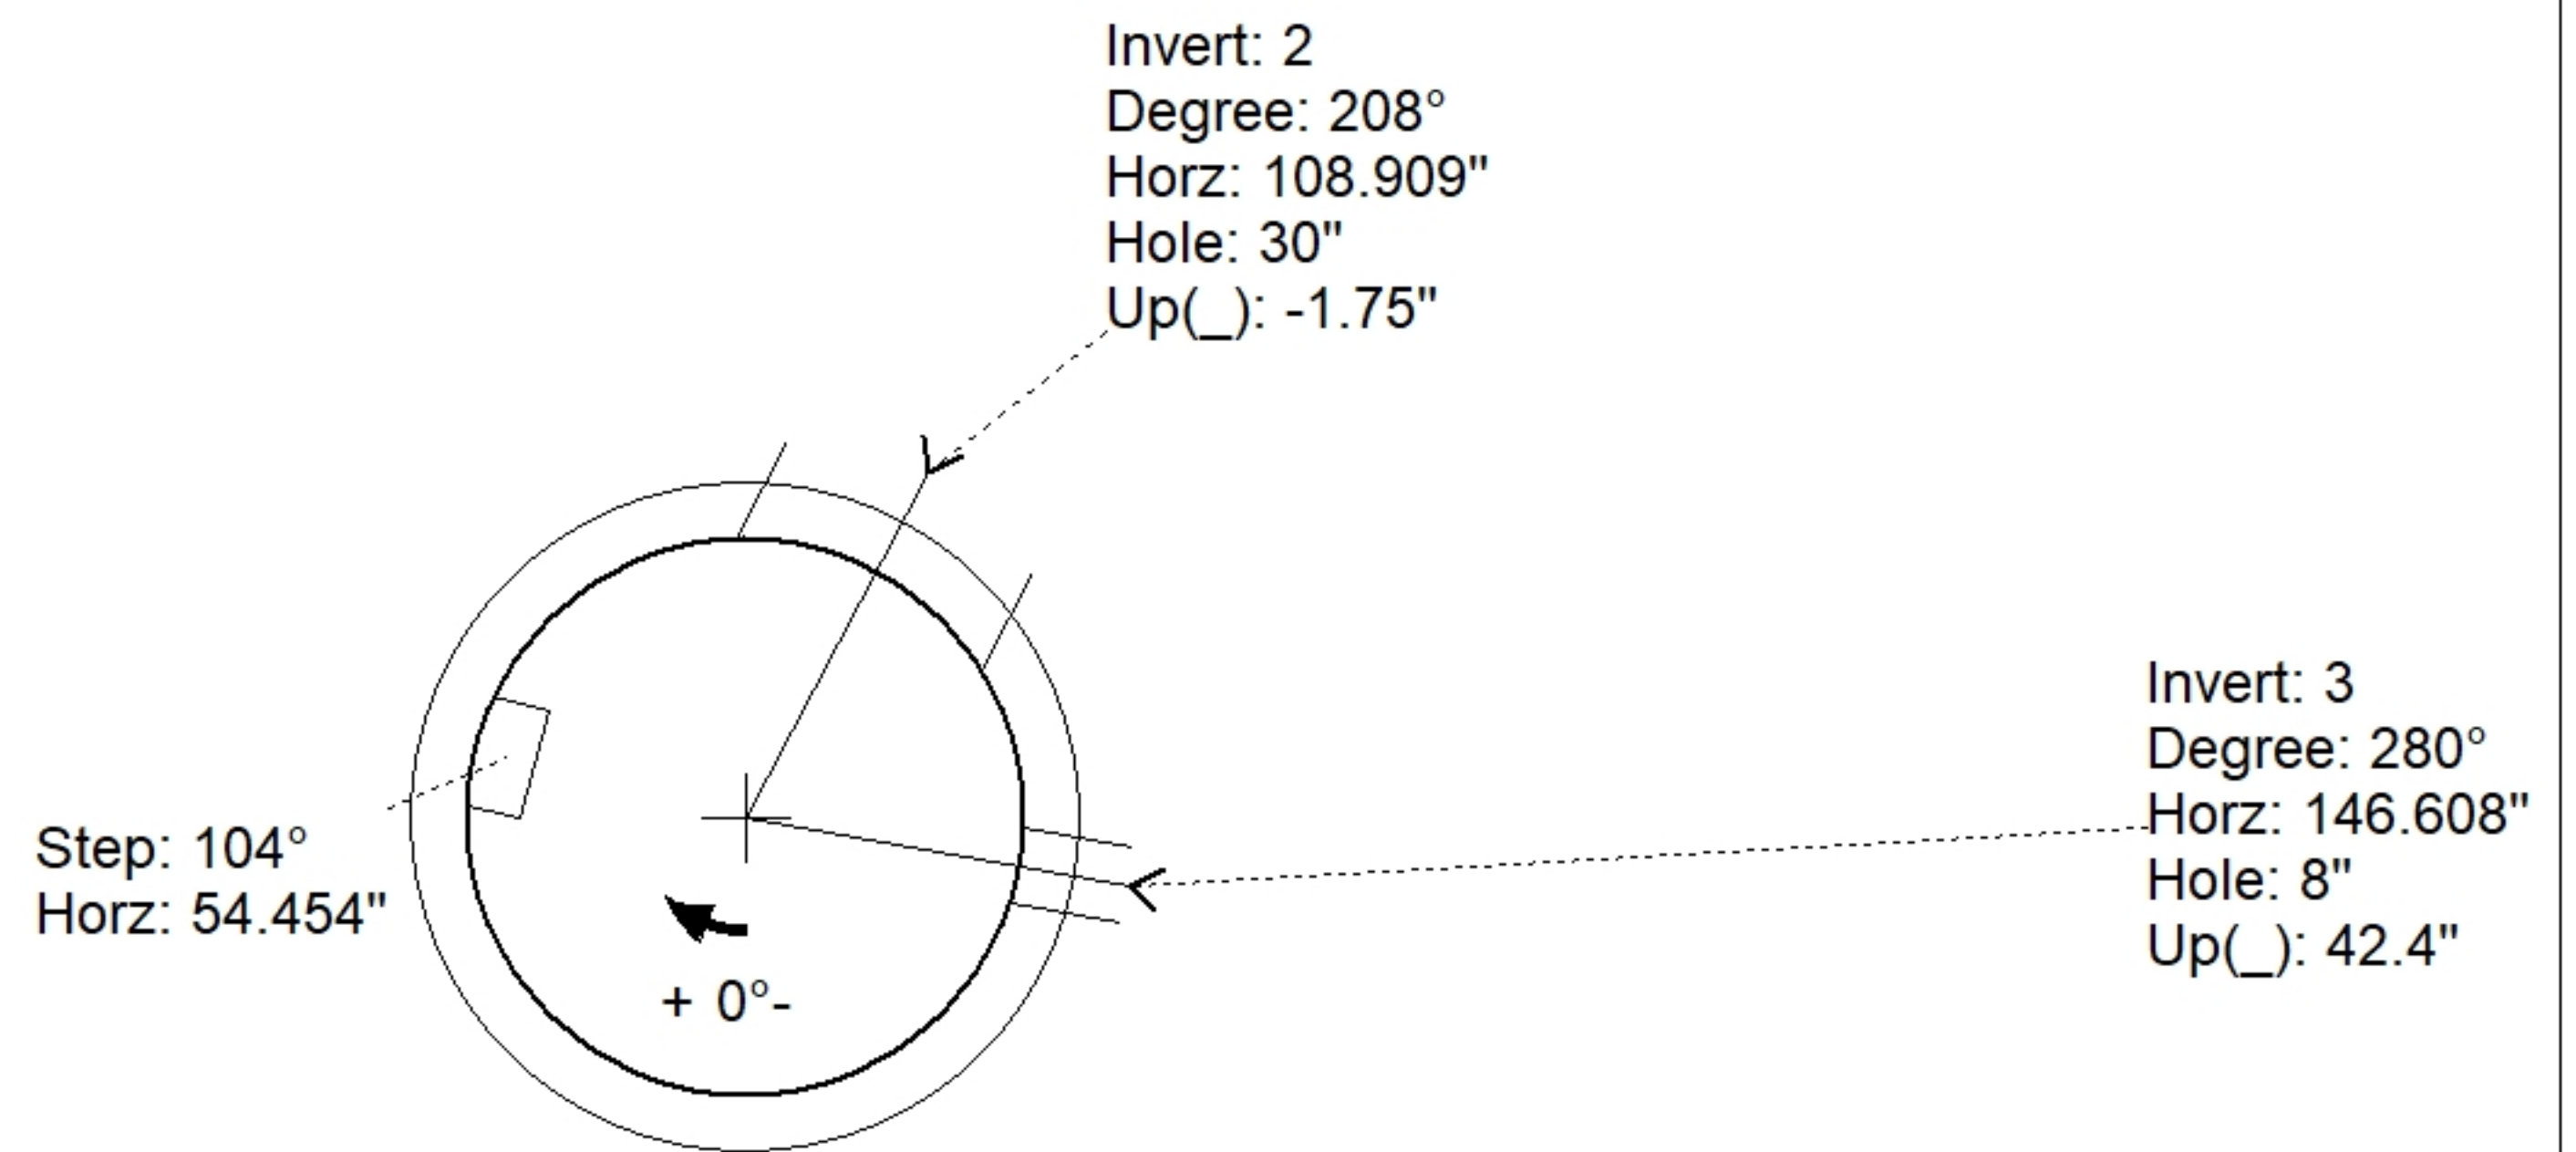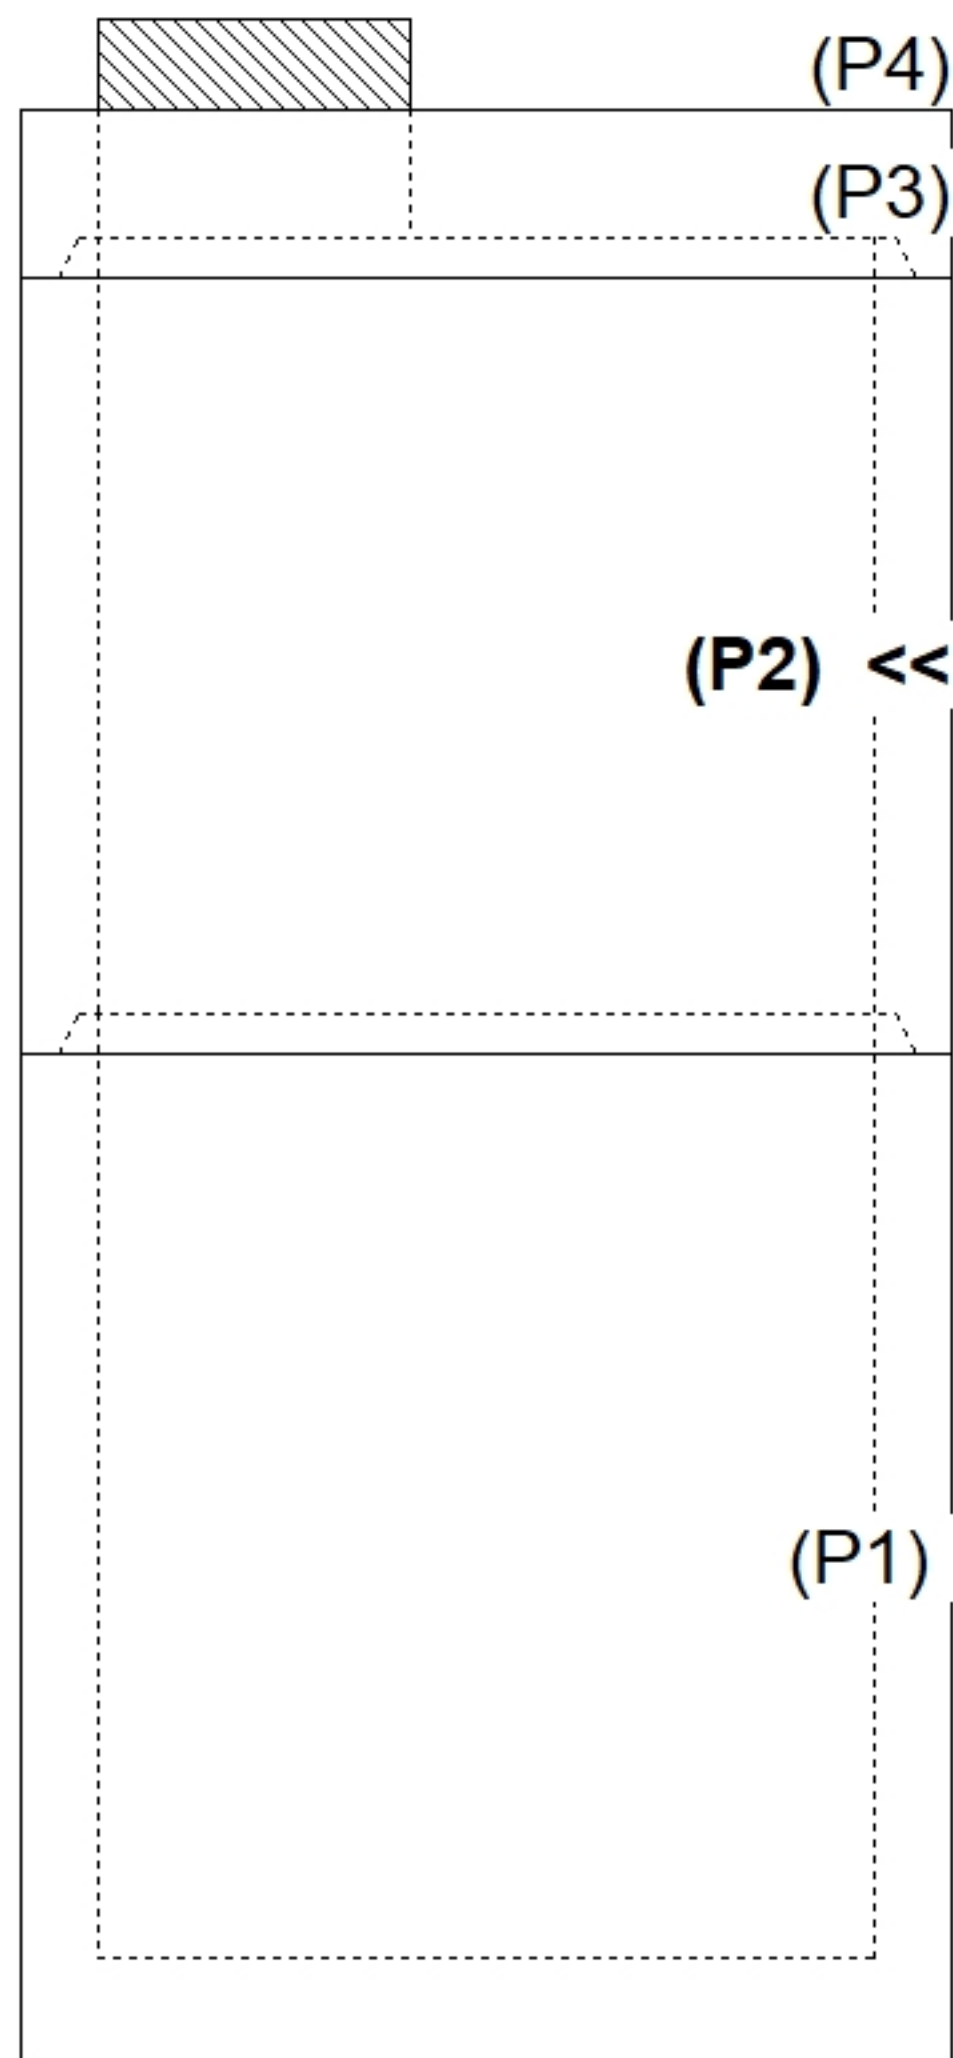

**INSIDE WALL DIMENSIONS**

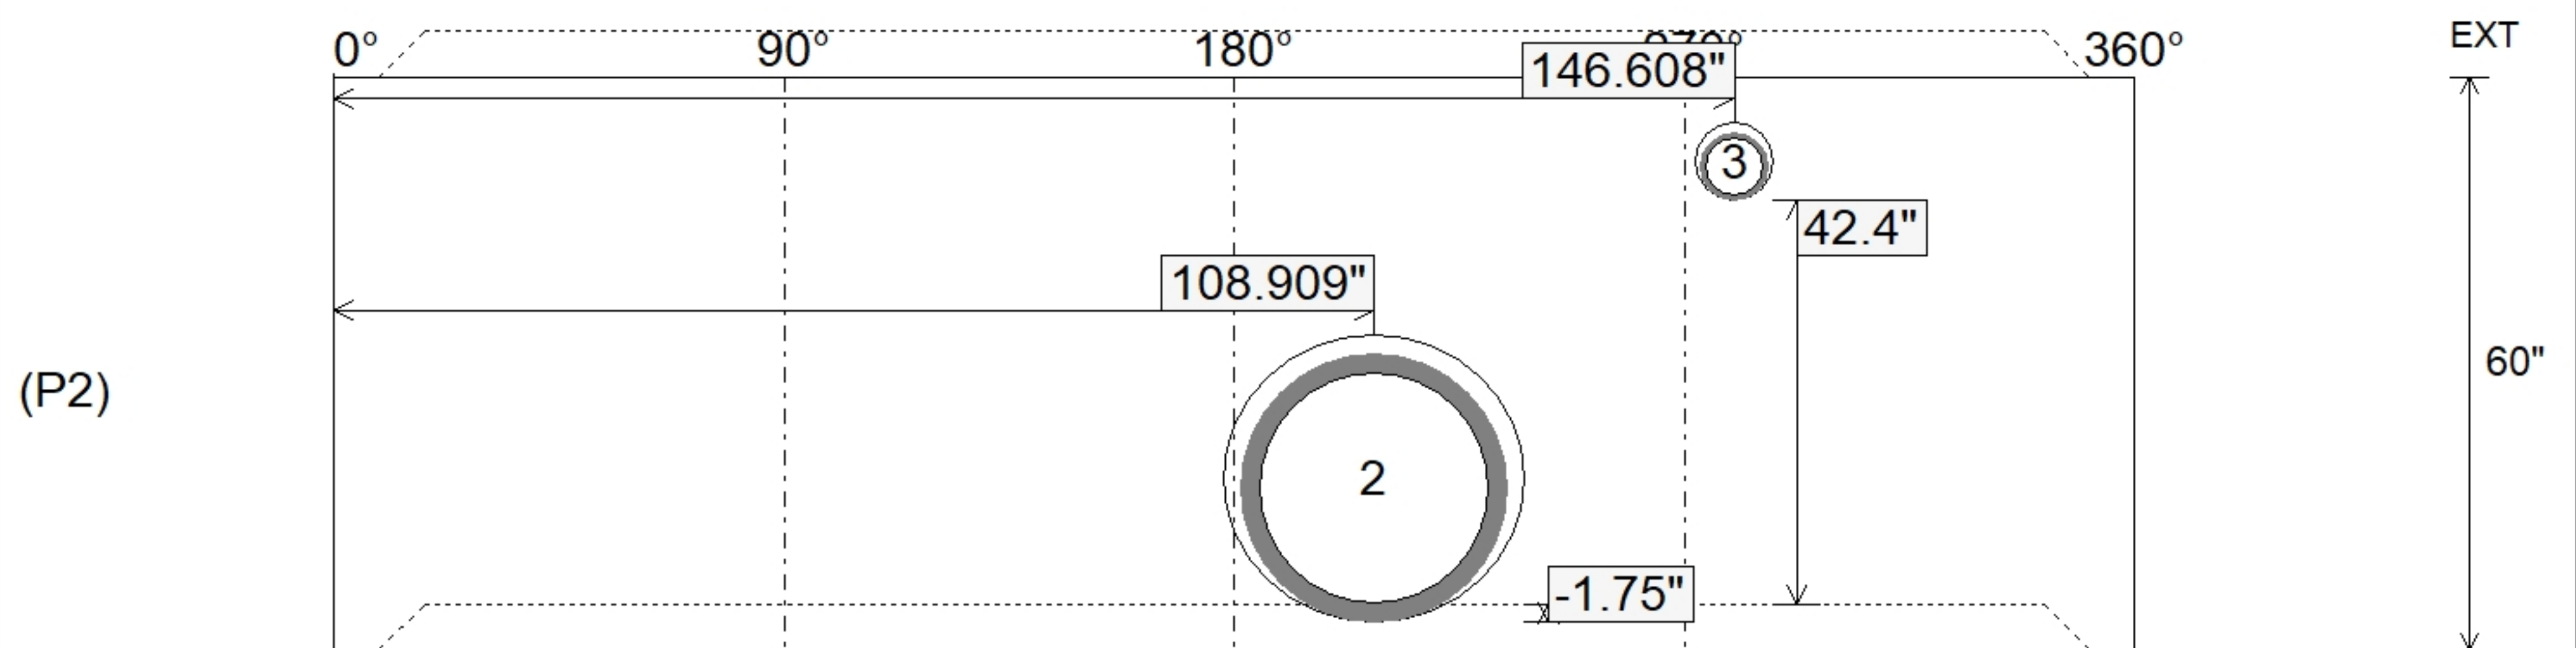

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"
Coating (Ext):			Weight (Net): 5868 lb Volume (Net): 1.5cu.yd