

Structure ID: JB2

P1 MH048BA24

MH BASE T/n

P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12" P1) 48" - MH BASE T/n - 24" 1) CASTING - HOE MCB-315-R F/G 1) 48" - Conseal CS-102 1.00" 2) Hole - 20 2) MH Step ML-10-TDS-NCR - 10"	0 lb 270 lb 1561 lb 2736 lb 258 lb 0 lb 0 lb 0 lb ----- 4825 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. NO STORM INVERT 5. STEPS AT 223.5 DEGREES 6. HOE MCB-315-R FRAME & RADIAL GRATE SUPPLIED BY ICAST
---	--	---




Structure Total: 4825 lb

Rim: 1013' Rim to Invert: 4' Slack: 1" Sump: 0" Step Position: 223.5°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (↓)	Offset
Invert 1	1009'	0°	0"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"
Invert 2	1009'	87°	44.035"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

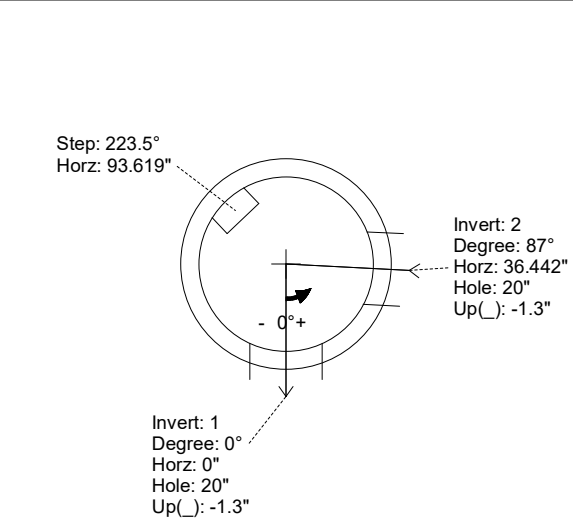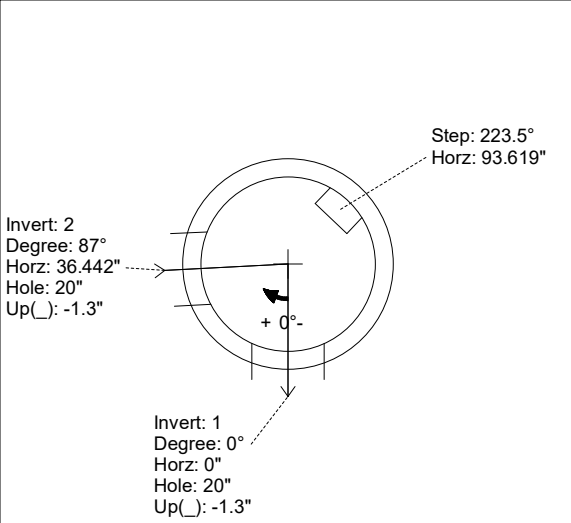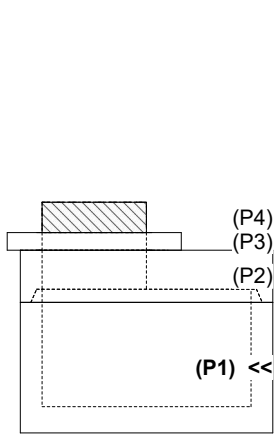

INSIDE WALL DIMENSIONS

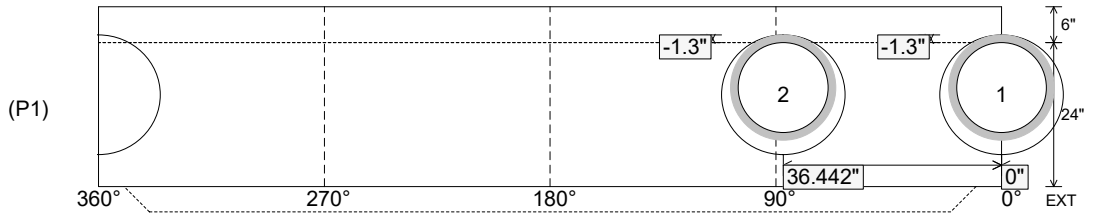

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 2736 lb Volume (Net): 0.7cu.yd
----------------------------------	---------------------------------	--	--	---