

Job Name: 25-1137B - East Bank Regional Pump Station
 Job Location: Nashville, TN
 Contractor: Garney Companies, Inc.

Plant: Beaver Dam

3/3/2026 11:46:19 AM

Tech: J. Copping

PC: J. Jarvis



Structure ID: MH-006 10+57



P3 MH048CCN36X

CON XYPEX CONE w/24" HOLE

- P5) 24" - CASTING HEIGHT - 7"
- P4) 24" - XYPEX GRADE RING - 4"
- P3) 48" - CON XYPEX CONE w/24" HOLE - 36"
- P2) 48" - MH RISER w/XYPEX - 72"
- P1) 48" - MH BASE w/XYPEX - 42"
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) 48" - SAN. INV. CHANNEL w/XYPEX - FULL HEIGHT
- 1) CASTING - JBS 1150 F/C SANITARY
- 2) 48" - Conseal CS-102 1.00" (Double)
- 2) Kor-N-Seal2 - S206-30

0 lb	Structure Notes:
270 lb	1. JBS-1150 METRO SANITARY BY ICAST.
2251 lb	2. PER ASTM C478 SPECIFICATIONS.
5030 lb	3. CONCRETE = 4,500 PSI AT 28 DAYS.
3632 lb	4. REINFORCING PER ASTM A615 (GRADE 60)
0 lb	- CONE (As .12)
0 lb	- RISER/WALLS (As .12)
1440 lb	- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
250 lb	
0 lb	
13 lb	NOTE: KOR-N-SEAL BOOTS SUPPLIED BY OTHERS

Structure Total:	12886 lb

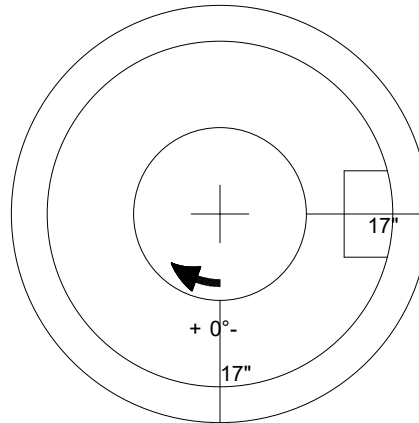

48" - CON XYPEX CONE w/24" HOLE - 36" - (P3)

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 2251 lb
 Volume (Net): 0.57cu.yd