

Job Name: 25-1137B - East Bank Regional Pump Station
 Job Location: Nashville, TN
 Contractor: Garney Companies, Inc.

Plant: Beaver Dam

3/3/2026 11:46:21 AM

Tech: J. Coppage

PC: J. Jarvis



Structure ID: MH-007 12+69



P3 MH048CCN36X

CON XYPEX CONE w/24" HOLE

- P5) 24" - CASTING HEIGHT - 7"
- P4) 24" - XYPEX GRADE RING - 6"
- P3) 48" - CON XYPEX CONE w/24" HOLE - 36"
- P2) 48" - MH RISER w/XYPEX - 72"
- P1) 48" - MH BASE Custom Ht, w/XYPEX - 49"
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) 48" - SAN. INV. CHANNEL w/XYPEX - FULL HEIGHT
- 1) CASTING - JBS 1150 F/C SANITARY
- 2) 48" - Conseal CS-102 1.00" (Double)
- 2) Kor-N-Seal2 - S206-30

- | | |
|---|--|
| <ul style="list-style-type: none"> 0 lb 405 lb 2251 lb 5030 lb 4121 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 13 lb | <p><u>Structure Notes:</u></p> <ol style="list-style-type: none"> 1. JBS-1150 METRO SANITARY BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,500 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60) <ul style="list-style-type: none"> - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. <p>NOTE: KOR-N-SEAL BOOTS SUPPLIED BY OTHERS</p> |
|---|--|

Structure Total: 13510 lb

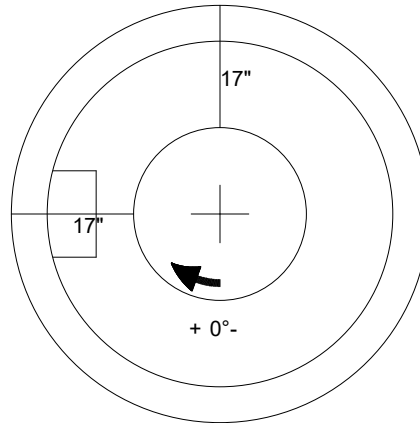

48" - CON XYPEX CONE w/24" HOLE - 36" - (P3)

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 2251 lb
 Volume (Net): 0.57cu.yd