

Job Name: 25-1137B - East Bank Regional Pump Station
 Job Location: Nashville, TN
 Contractor: Garney Companies, Inc.

Plant: Beaver Dam

3/3/2026 11:46:22 AM

Tech: J. Coppage

PC: J. Jarvis





Structure ID: MH-008 12+92

P3 MH048CCN36X

CON XYPEX CONE w/24" HOLE

- P5) 24" - CASTING HEIGHT - 7"
- P4) 24" - XYPEX GRADE RING - 6"
- P3) 48" - CON XYPEX CONE w/24" HOLE - 36"
- P2) 48" - MH RISER w/XYPEX - 60"
- P1) 48" - MH BASE w/XYPEX - 54"
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) 48" - SAN. INV. CHANNEL w/XYPEX - FULL HEIGHT
- 1) CASTING - JBS 1150 F/C SANITARY
- 2) 48" - Conseal CS-102 1.00" (Double)
- 2) Kor-N-Seal2 - S206-30

<ul style="list-style-type: none"> 0 lb 405 lb 2251 lb 4192 lb 4471 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 13 lb 	<p><u>Structure Notes:</u></p> <ol style="list-style-type: none"> 1. JBS-1150 METRO SANITARY BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,500 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60) <ul style="list-style-type: none"> - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. <p>NOTE: KOR-N-SEAL BOOTS SUPPLIED BY OTHERS</p>
<p>Structure Total: 13021 lb</p>	

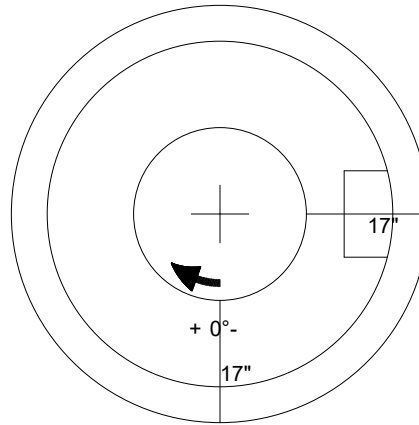

48" - CON XYPEX CONE w/24" HOLE - 36" - (P3)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 2251 lb Volume (Net): 0.57cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--