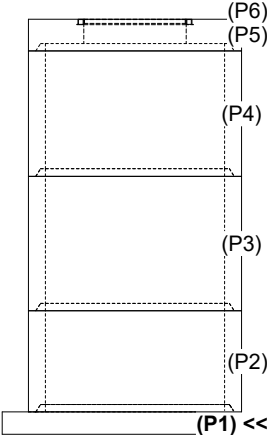
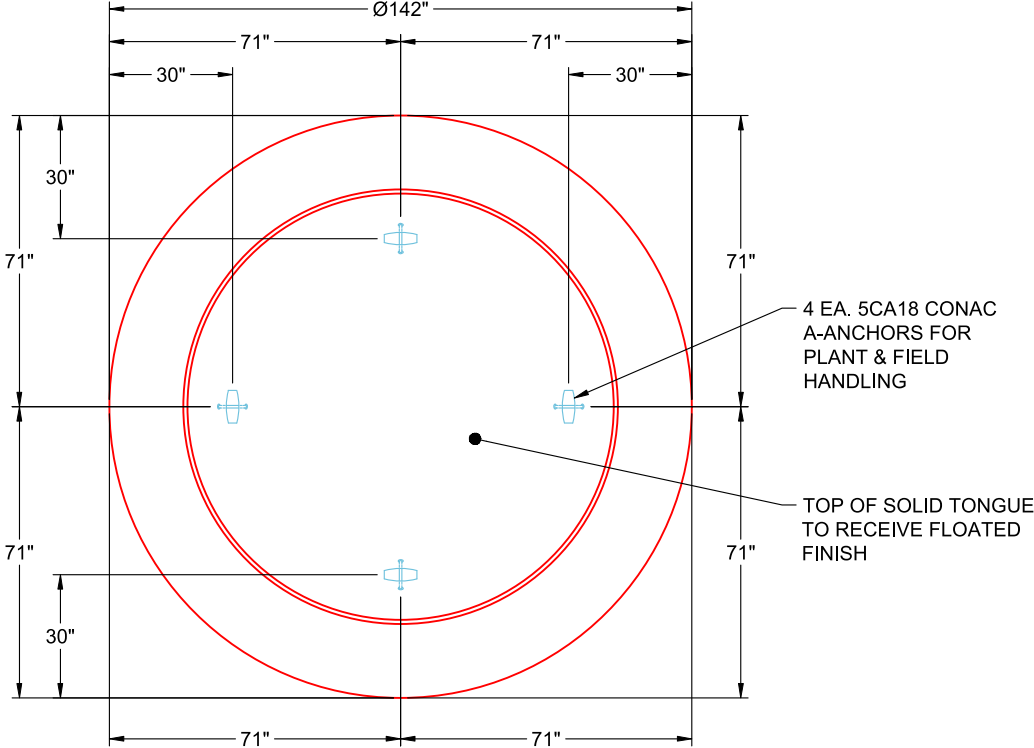
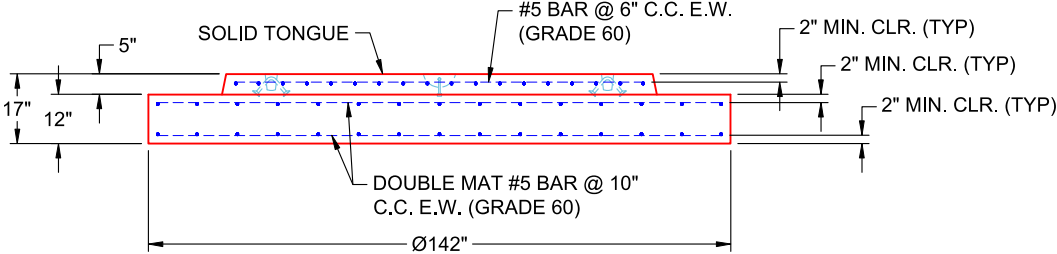


Job Name: 26-1038 - Perryville & Junction City WW Improvements Job Location: Danville, KY Contractor: Connhurst, LLC		Plant: 100 5/6/2026 4:05:51 PM	Tech: Jared - A PC: E. Bradley															
Structure ID: 61038 (4)																		
P1 MH096SB12		MH SEPARATE BASE-T EXT. 14" (142" OD) T/n																
P6) 42" x 55" - HATCH (CAST FLUSH) - 3" P5) 96" - MH FLAT TOP w/42"x55" Hatch F/G - 17" P4) 96" - MH RISER Custom Ht T/G - 67" P3) 96" - MH RISER T/G - 72" P2) 96" - MH RISER T/G - 54" P1) 96" - MH SEPARATE BASE-T EXT. 14" (142" OD) T/n - 12" 1) This Structure Includes a Cast-in Item - 42" x 55" Hatch (Supplied by Others) 4) JOINT WRAP - 12" WD x 096" MAC WRAP 4) 96" - Conseal CS-231 1.00" (Double) 3) PSX - 8QRS-S NYLO 1) PSX - 12-08 NYLO		<table><tr><td>0 lb</td><td rowspan="10">Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,500 PSI AT 28 DAYS 3. REINFORCEMENT - 2" MIN. REBAR CLEARANCE (TYP): - SOLID TONGUE: #5 BAR @ 6" C.C. E.W. (GRADE 60) - MAT: DOUBLE MAT #5 BAR @ 10" C.C. E.W. (GRADE 60) 4. LIFTERS: 4 EA. 5CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN 5. TOP OF SOLID TONGUE TO RECEIVE FLOATED FINISH</td></tr><tr><td>8820 lb</td></tr><tr><td>16574 lb</td></tr><tr><td>17851 lb</td></tr><tr><td>13452 lb</td></tr><tr><td>19580 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>20 lb</td></tr><tr><td>8 lb</td></tr><tr><td colspan="2">Structure Total: 76305 lb</td></tr></table>			0 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,500 PSI AT 28 DAYS 3. REINFORCEMENT - 2" MIN. REBAR CLEARANCE (TYP): - SOLID TONGUE: #5 BAR @ 6" C.C. E.W. (GRADE 60) - MAT: DOUBLE MAT #5 BAR @ 10" C.C. E.W. (GRADE 60) 4. LIFTERS: 4 EA. 5CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN 5. TOP OF SOLID TONGUE TO RECEIVE FLOATED FINISH	8820 lb	16574 lb	17851 lb	13452 lb	19580 lb	0 lb	0 lb	0 lb	20 lb	8 lb	Structure Total: 76305 lb	
0 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,500 PSI AT 28 DAYS 3. REINFORCEMENT - 2" MIN. REBAR CLEARANCE (TYP): - SOLID TONGUE: #5 BAR @ 6" C.C. E.W. (GRADE 60) - MAT: DOUBLE MAT #5 BAR @ 10" C.C. E.W. (GRADE 60) 4. LIFTERS: 4 EA. 5CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN 5. TOP OF SOLID TONGUE TO RECEIVE FLOATED FINISH																	
8820 lb																		
16574 lb																		
17851 lb																		
13452 lb																		
19580 lb																		
0 lb																		
0 lb																		
0 lb																		
20 lb																		
8 lb																		
Structure Total: 76305 lb																		
Rim: 963.5' Rim to Invert: 10.85' Slack: 0" Sump: 74.8" Step Position:																		
		 PLAN VIEW (RIGHT SIDE UP)																
		 FRONT VIEW (RIGHT SIDE UP)																
Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 9" Floor Height: 12"	Height (Int): 0" Height (Ext): 0"	Weight (Net): 19580 lb Volume (Net): 5cu.yd														