



Job Name: 26-1077 - Westside Markets of Greensboro Village Job Location: Gallatin, TN Contractor: Cleary Construction, Inc.					Plant: 100 5/5/2026 12:10:51 PM		Tech: J. Coppage - F PC: C. Goff				
Structure ID: B2											
P1		BX2436-08BA48		BOX BASE 8inW, 8inF T/n							
P3) 24" x 36" - CASTING HEIGHT - 5" P2) 24" x 36" - BOX RISER 8inW, Variable Ht F/G - 46" P1) 24" x 36" - BOX BASE 8inW, 8inF T/n - 48" 1) CASTING - EJ 6499 Beehive Grate 1) 24" x 36" - STORM INVERT CHANNEL (FLAT) - 4" THK 2) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 38 1) Hole - 6					0 lb 4694 lb 5133 lb 250 lb 450 lb 0 lb 0 lb 0 lb Structure Total: 10527 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS. 4. CASTING SUPPLIED BY I-CAST (EJ 6499). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 498'		Rim to Invert: 8.27'		Slack: 0.24"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	489.73'	270°	26"	30" HDPE	35.1"	Hole 38	38"	37"	-2.5"	0"	
Invert 2	489.83'	90°	26"	30" HDPE	35.1"	Hole 38	38"	37"	-1.375"	0"	
Invert 3	491.9'	180°	20"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	25.625"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

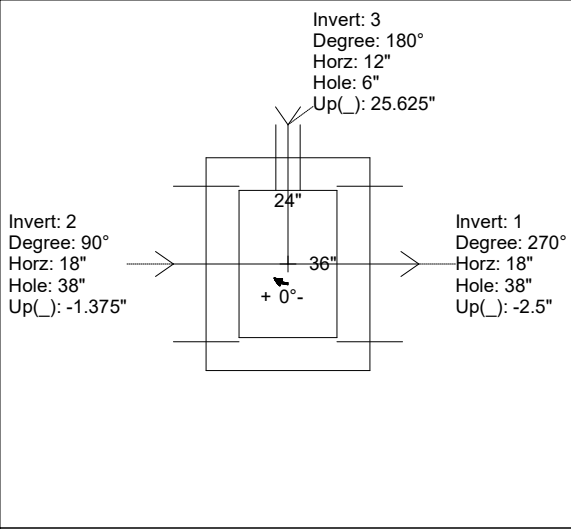

UPSIDE-DOWN VIEW (int. dimensions)

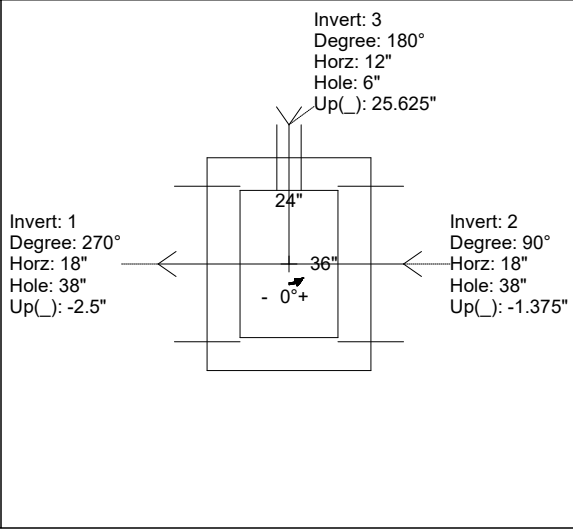

INSIDE WALL DIMENSIONS

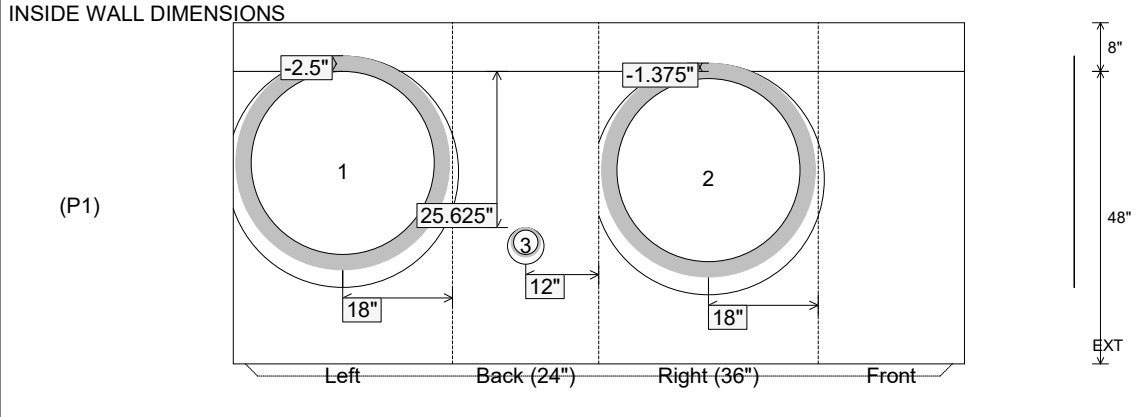

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 48" Height (Ext): 56"	Weight (Net): 5133 lb Volume (Net): 1.31cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 26-1077 - Westside Markets of Greensboro Village
Job Location: Gallatin, TN
Contractor: Cleary Construction, Inc.

Plant: 100

5/5/2026 12:10:51 PM

Tech: J. Coppage - F

PC: C. Goff



Structure ID: B2

P1 BX2436-08BA48

BOX BASE 8inW, 8inF T/n

P3) 24" x 36" - CASTING HEIGHT - 5"
P2) 24" x 36" - BOX RISER 8inW, Variable Ht F/G - 46"
P1) 24" x 36" - BOX BASE 8inW, 8inF T/n - 48"

1) CASTING - EJ 6499 Beehive Grate

1) 24" x 36" - STORM INVERT CHANNEL (FLAT) - 4" THK

2) 24" x 36" - Conseal CS-102 1.00"

2) Hole - 38

1) Hole - 6

0 lb

4694 lb

5133 lb

250 lb

450 lb

0 lb

0 lb

0 lb

Structure Total: 10527 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS.
4. CASTING SUPPLIED BY I-CAST (EJ 6499).

REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As .12) #5 BARS AT 12" C.C.E.W.




- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 498' Rim to Invert: 8.27' Slack: 0.24" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	489.73'	270°	26"	30" HDPE	35.1"	Hole 38	38"	37"	-2.5"	0"
Invert 2	489.83'	90°	26"	30" HDPE	35.1"	Hole 38	38"	37"	-1.375"	0"
Invert 3	491.9'	180°	20"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	25.625"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

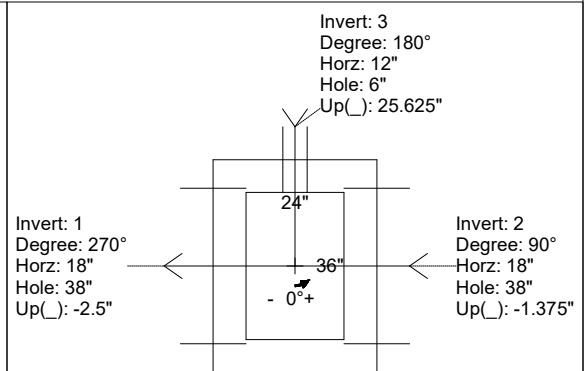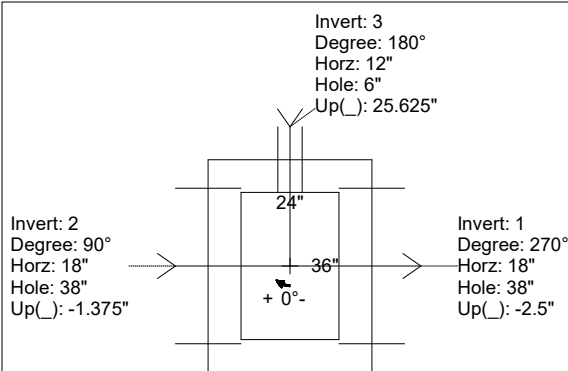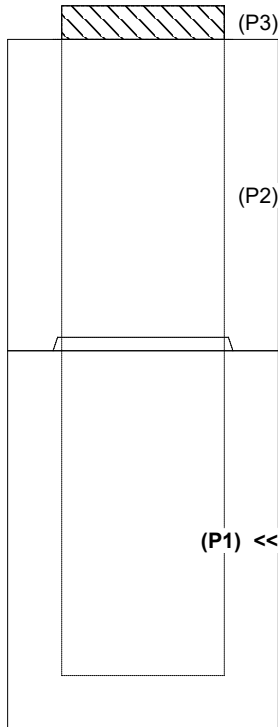

FOR INVERT ONLY

INSIDE WALL DIMENSIONS

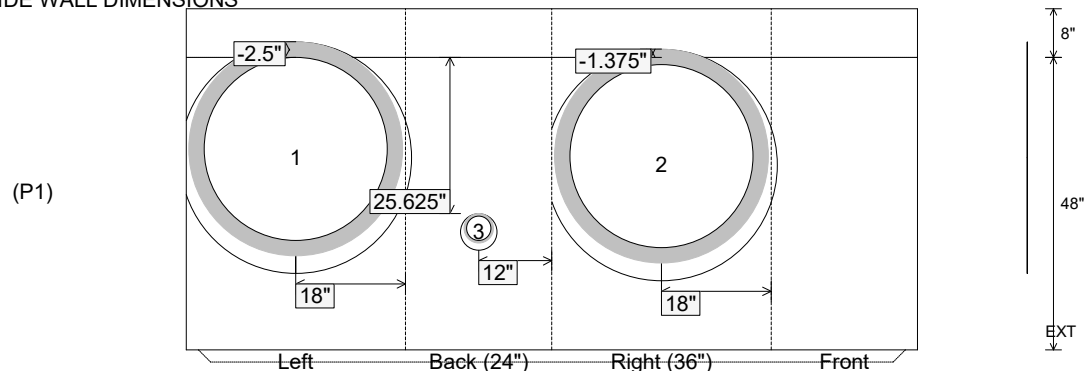

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 48"
Height (Ext): 56"

Weight (Net): 5133 lb
Volume (Net): 1.31cu.yd