

Job Name: 26-1077 - Westside Markets of Greensboro Village
 Job Location: Gallatin, TN
 Contractor: Cleary Construction, Inc.

Plant: 100

Tech: J. Horsley - F

3/3/2026 2:35:42 PM

PC: C. Goff



Structure ID: D1 (30)

P2 BX066066-08W-RSVF

BOX RISER 8inW, Variable Ht F/G

- P3) 66" x 66" - CASTING HEIGHT - 0"
- P2) 66" x 66" - BOX RISER 8inW, Variable Ht F/G - 49"
- P1) 66" x 66" - BX BASE w/FLANGE 08W/12F/18EF T/n - 70"
- 1) SECONDARY POUR
- 1) 66" x 66" - Conseal CS-102 1.00"
- 1) Hole - 62
- 1) Hole - 1
- 1) Hole - 3
- 1) Orifice - 6.5"
- 1) Weir n/n - 12"x31.2"



0 lb
 9488 lb
 25876 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 Structure Total: 35364 lb

- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STEPS
 5. CASTING SUPPLIED BY OTHERS
 6. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED IN 90 & 270 WALLS, MIN. 16" FROM TOP OF WALLS


Rim: 496.15' Rim to Invert: 9.95' Slack: 0.4" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5	493.55'	180°	41"	12" x 31.2" Weir	12" x 31.2"	Weir 12"x31.2"	12" x 31.2"	12"	16.25"	0"
Invert 6										

RIGHT-SIDE UP VIEW (int. dimensions)

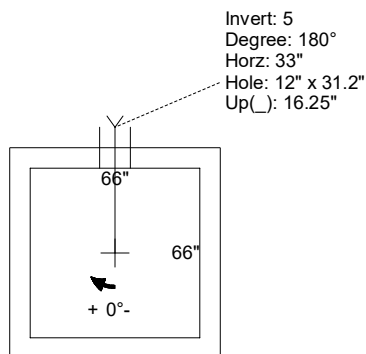

INSIDE WALL DIMENSIONS

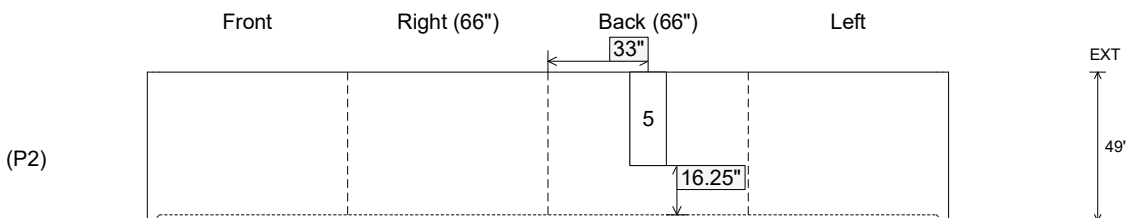

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 8"
 Floor Height: 0"

Height (Int): 49"
 Height (Ext): 49"

Weight (Net): 9488 lb
 Volume (Net): 2.42cu.yd