

Job Name: 26-1150 One Senior Care
 Job Location: Morehead, KY
 Contractor: W Principles

Plant: 100

2/17/2026 9:40:57 AM

Tech: J. Horsley

PC: E. Bradley



Structure ID: JB 1

P1 BX3648-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P3) CASTING (cast in) - 0
- P2) 36" x 48" - CB FLAT TOP 8"W w/24" HOLE F/F - 6"
- P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 33"
- 1) CASTING - HOE KY-206 F/C (KY TY1)
- 1) 36" x 48" - Conseal CS-102 1.00"
- 2) Hole - 16
- 1) DOGHOUSE INVRTD - 16"x15"

0 lb
 1448 lb
 6224 lb
 206 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 7878 lb

Structure Notes:
 ** KYTC STATE PROJECT **
 1. KYTC JUNCTION BOX B2 / PER ASTM C913 SPEC'S.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. CASTING BY ICAST (HOE KY-206 F/C KY TY.1)




REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 739.87' Rim to Invert: 3.25' Slack: 0" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	736.62'	0°	26"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"
Invert 2	738.22'	45°	17.375"	12" HDPE	14.5"	DOGHOUSE INVRTD 16"x15"	16" x 15"	22.627"	18"	8"
Invert 3	736.62'	90°	48"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	16"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

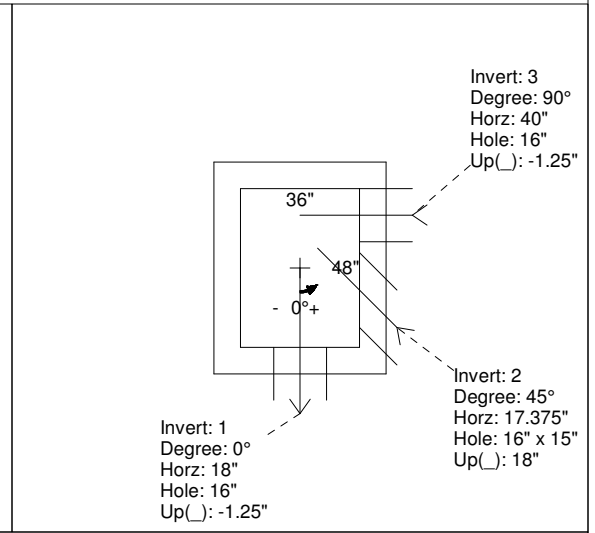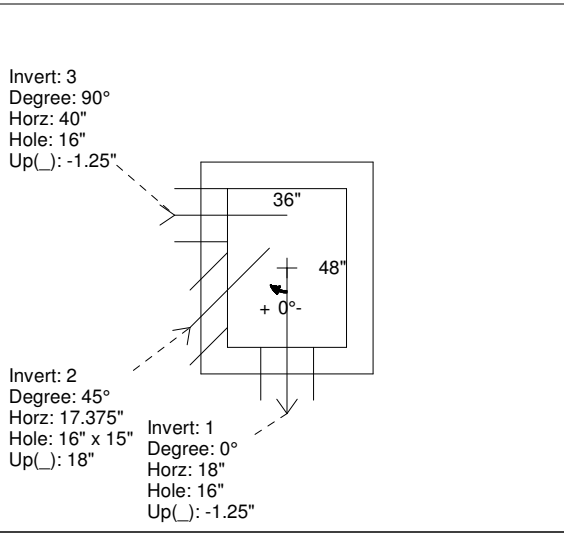

INSIDE WALL DIMENSIONS

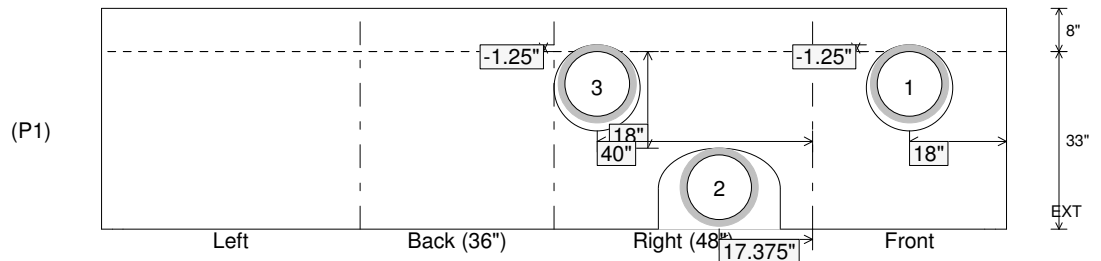

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 33"
 Height (Ext): 41"

Weight (Net): 6224 lb
 Volume (Net): 1.59cu.yd