

Job Name: 25-1431 - Georgetown Commons  
 Job Location: Georgetown, KY  
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

4/9/2026 10:01:30 AM

Tech: J. Coppage

PC: A. Chambers



**Structure ID: CBI 242**

**P2 BX2436-08R24**

**BOX RISER 8inW**

- P4) 24" x 60" - CB INLET KY A 5' TOP LEFT - 10"
- P3) 24" x 60" - CB INLET KY A 5' BOTTOM LEFT - 18"
- P2) 24" x 36" - BOX RISER 8inW - 24"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 45"
- 2) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 20
- 1) Hole - 6



1895 lb  
 2670 lb  
 2430 lb  
 5777 lb  
 0 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 12772 lb

- Structure Notes:**
1. JR HOE KY-206 PROVIDED BY ICAST.
  2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
  3. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
  4. CONCRETE = 4,000 PI AT 28 DAYS.
  5. REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.  
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.  
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 878.7' Rim to Invert: 7.95' Slack: 0.9' Sump: 2.5' Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1										
Invert 2	875.5'	180°	20"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	11.5"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

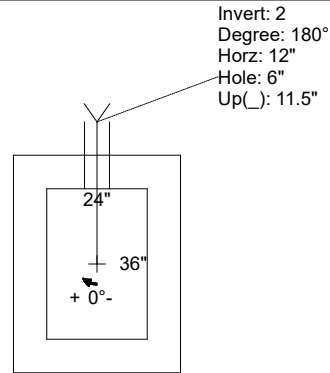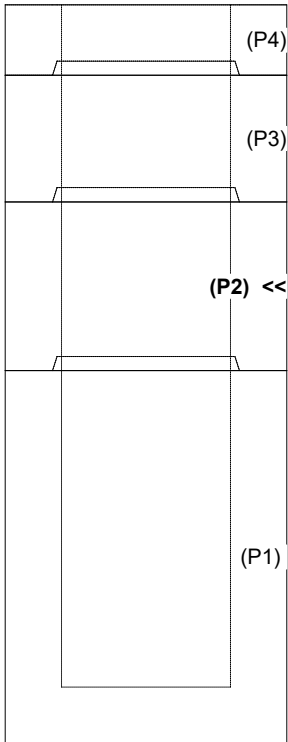

**INSIDE WALL DIMENSIONS**

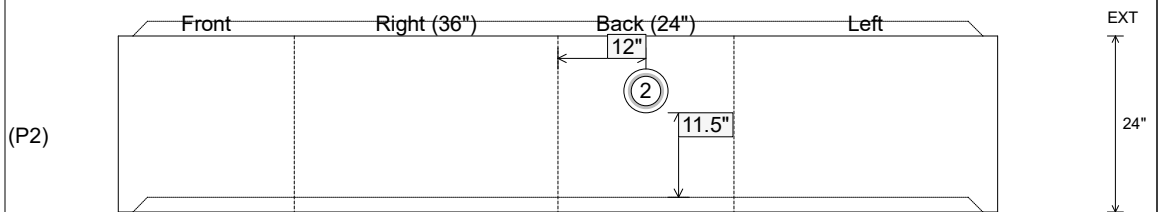

Coating (Int):  
 Coating (Ext):

Seam Up: Tongue  
 Seam Dn: Groove

Wall Thickness: 8"  
 Floor Height: 0"

Height (Int): 24"  
 Height (Ext): 24"

Weight (Net): 2430 lb  
 Volume (Net): 0.62cu.yd