

Job Name: 25-1431 - Georgetown Commons  
 Job Location: Georgetown, KY  
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

Tech: J. Coppage

4/23/2026 11:30:50 AM

PC: A. Chambers




**Structure ID: DCI 142**

**P3 BX4848-08LD08-S**

**CB FLAT TOP 8"W w/24"x36" HOLE**

- P4) 24" x 36" - CASTING HEIGHT - 6"
- P3) 48" x 48" - CB FLAT TOP 8"W w/24"x36" HOLE - 8"
- P2) 48" x 48" - BOX RISER 8inW - 54"
- P1) 48" x 48" - BOX BASE 8inW, 8inF - 60"
- 1) CASTING - HOE 470 SET (F/G/H)
- 1) Hole - 46
- 2) Hole - 30

0 lb	<b>Structure Notes:</b>
2170 lb	1. JR HOE HOE-470 PROVIDED BY ICAST.
8120 lb	2. PER ASTM C913 SPECIFICATIONS.
9707 lb	3. CONCRETE = 4,000 PSI AT 28 DAYS.
394 lb	4. REINFORCING PER ASTM A615 (GRADE 60).
0 lb	- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
0 lb	- RISER/WALLS (As .37) #5 BARS AT 10" C.C.E.W.
-----	- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.
Structure Total:	20391 lb

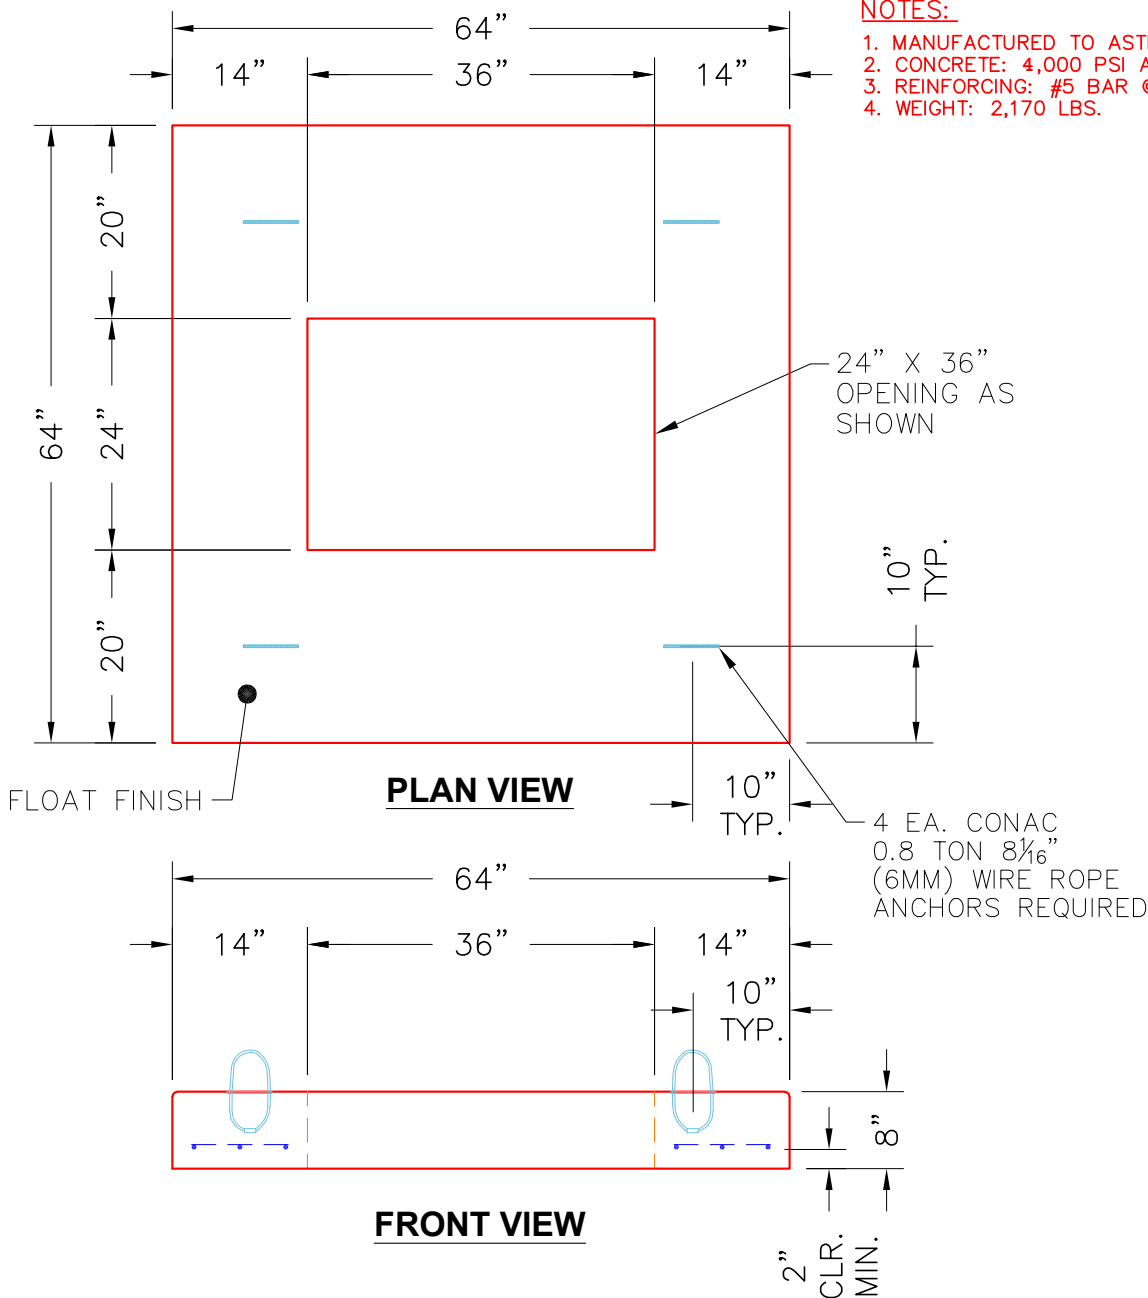

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 8"	Weight (Net): 2170 lb Volume (Net): 0.55cu.yd
----------------------------------	--------------------------------	--------------------	------------------	--