

Structure ID: CB-27-68 CB2-2

P1 BX2424-08BA24

BOX BASE 8inW, 8inF T/n

P3) 24" x 24" - CASTING (cast in) - 3" P2) 24" x 24" - BX MONOTOP 8"W/6"T w/HOE 280T CAST IN F/G - 30" P1) 24" x 24" - BOX BASE 8inW, 8inF T/n - 24" 1) CASTING - HOE 280T F/G 2) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 16 4) Weir n/n - 24"x6"	0 lb 2803 lb 3001 lb 182 lb 0 lb 0 lb 0 lb ----- 5987 lb	Structure Total:
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------	------------------




Structure Notes:
 PLAN LABEL: 27
 1. HOE 280T F/G PROVIDED BY ICAST (CAST-IN).
 2. PER ASTM C913 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. NO INVERT CHANNEL.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 860.56' Rim to Invert: 4.98' Slack: -0.24" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	855.58'	0°	20"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

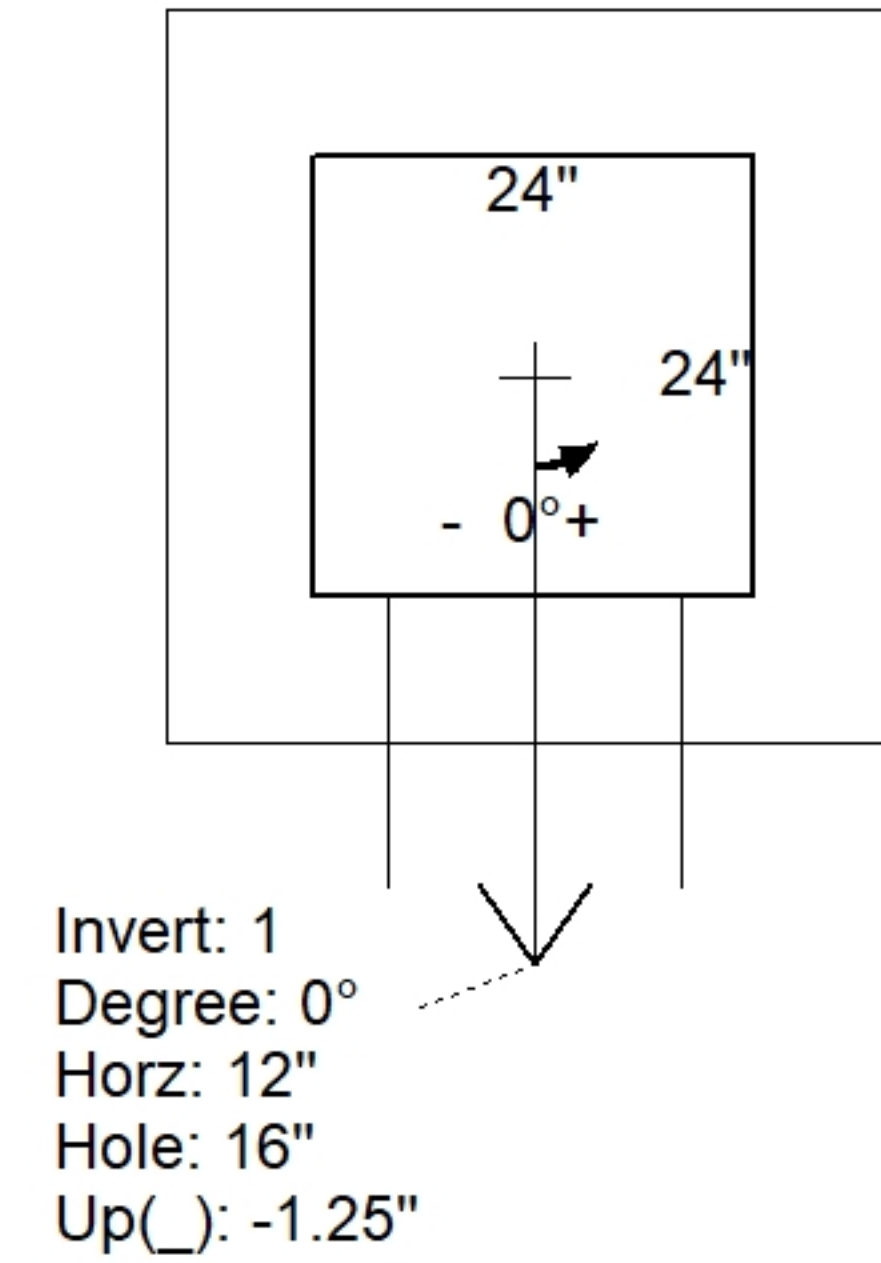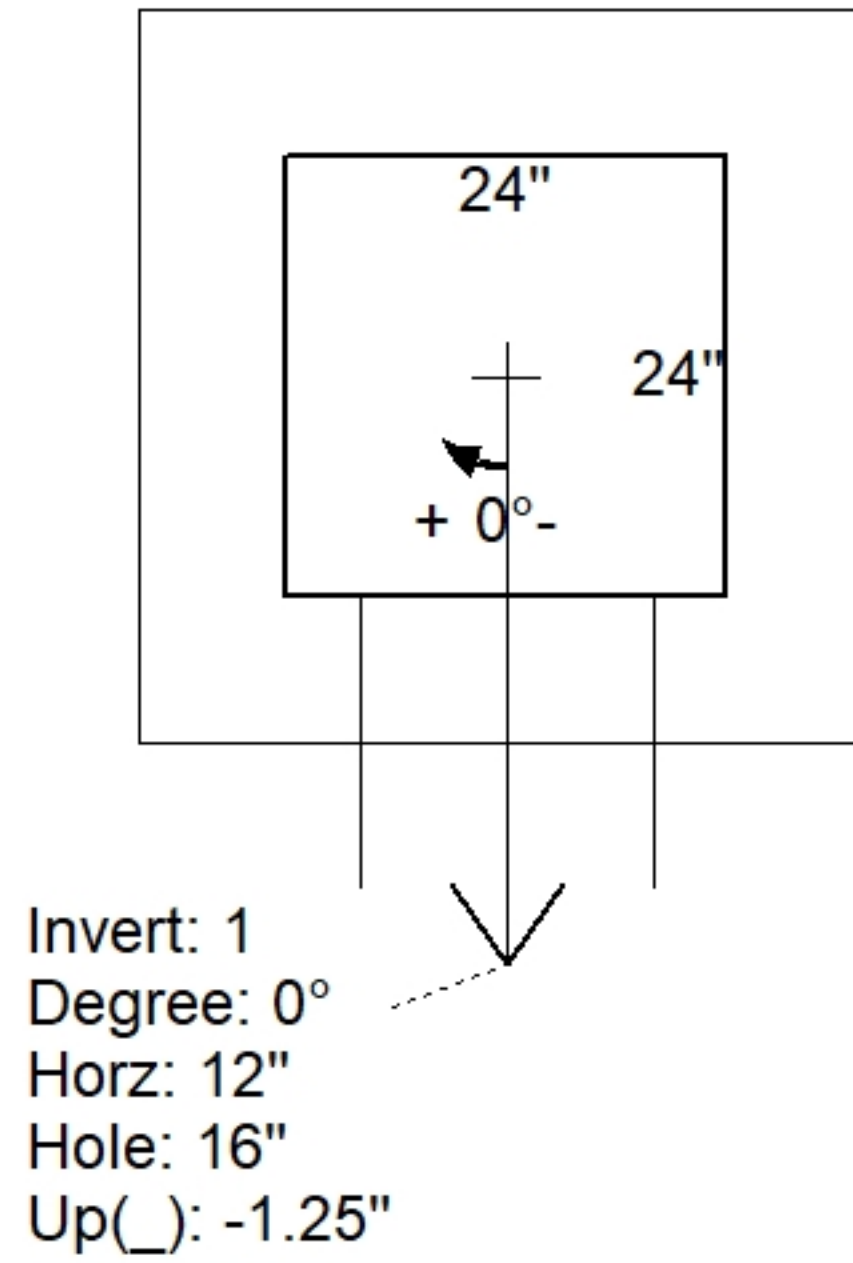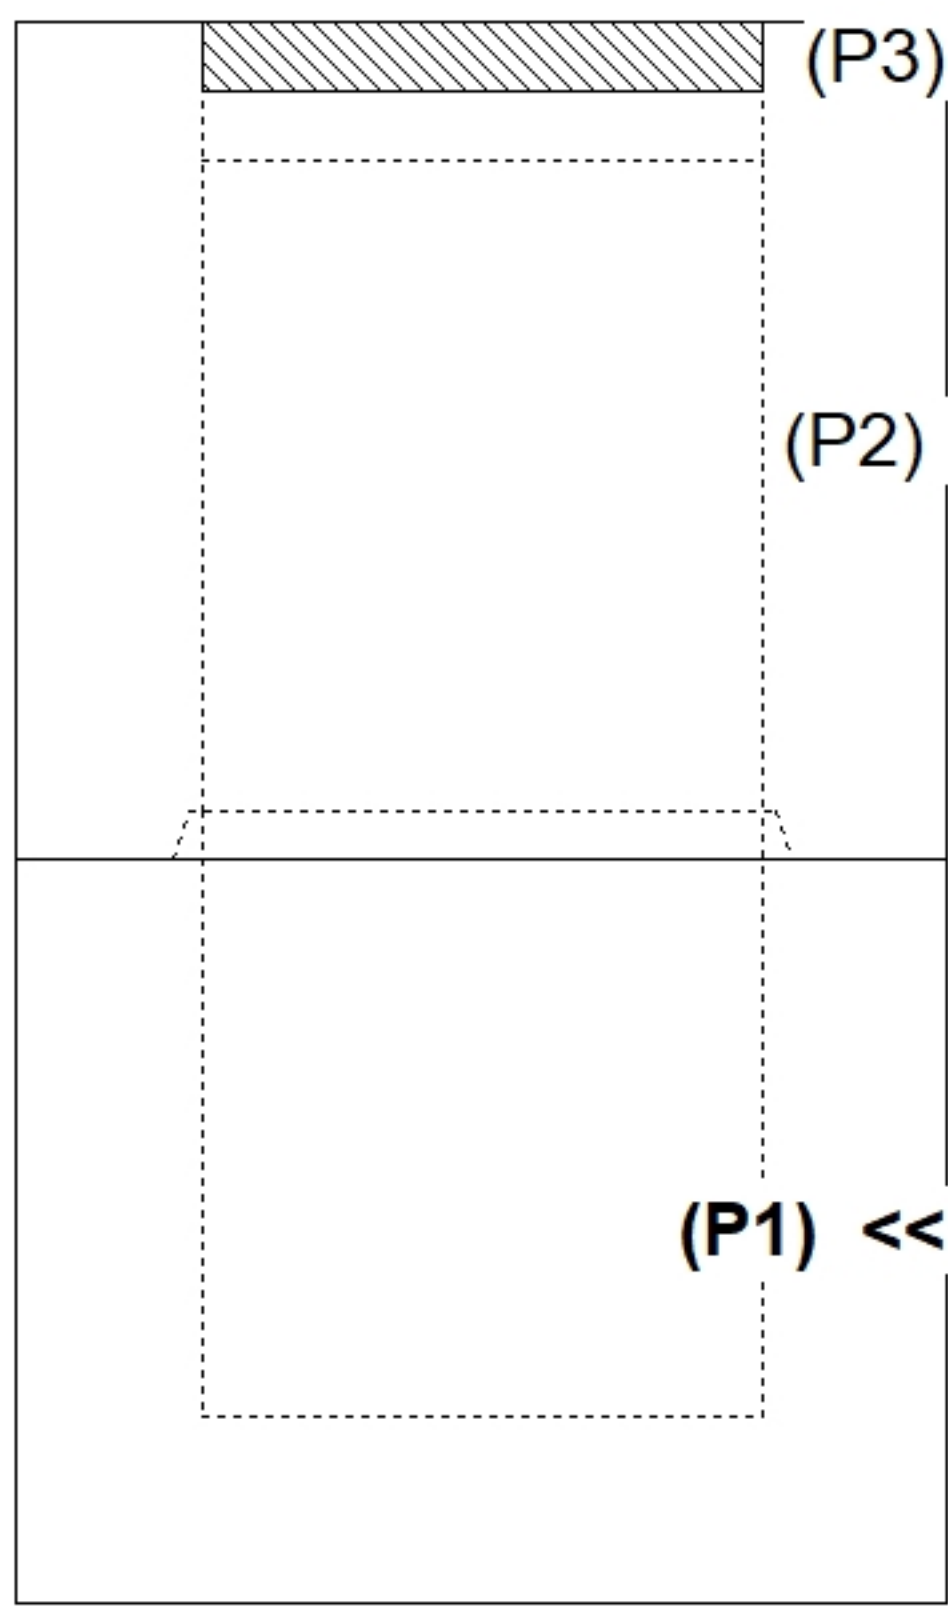

INSIDE WALL DIMENSIONS

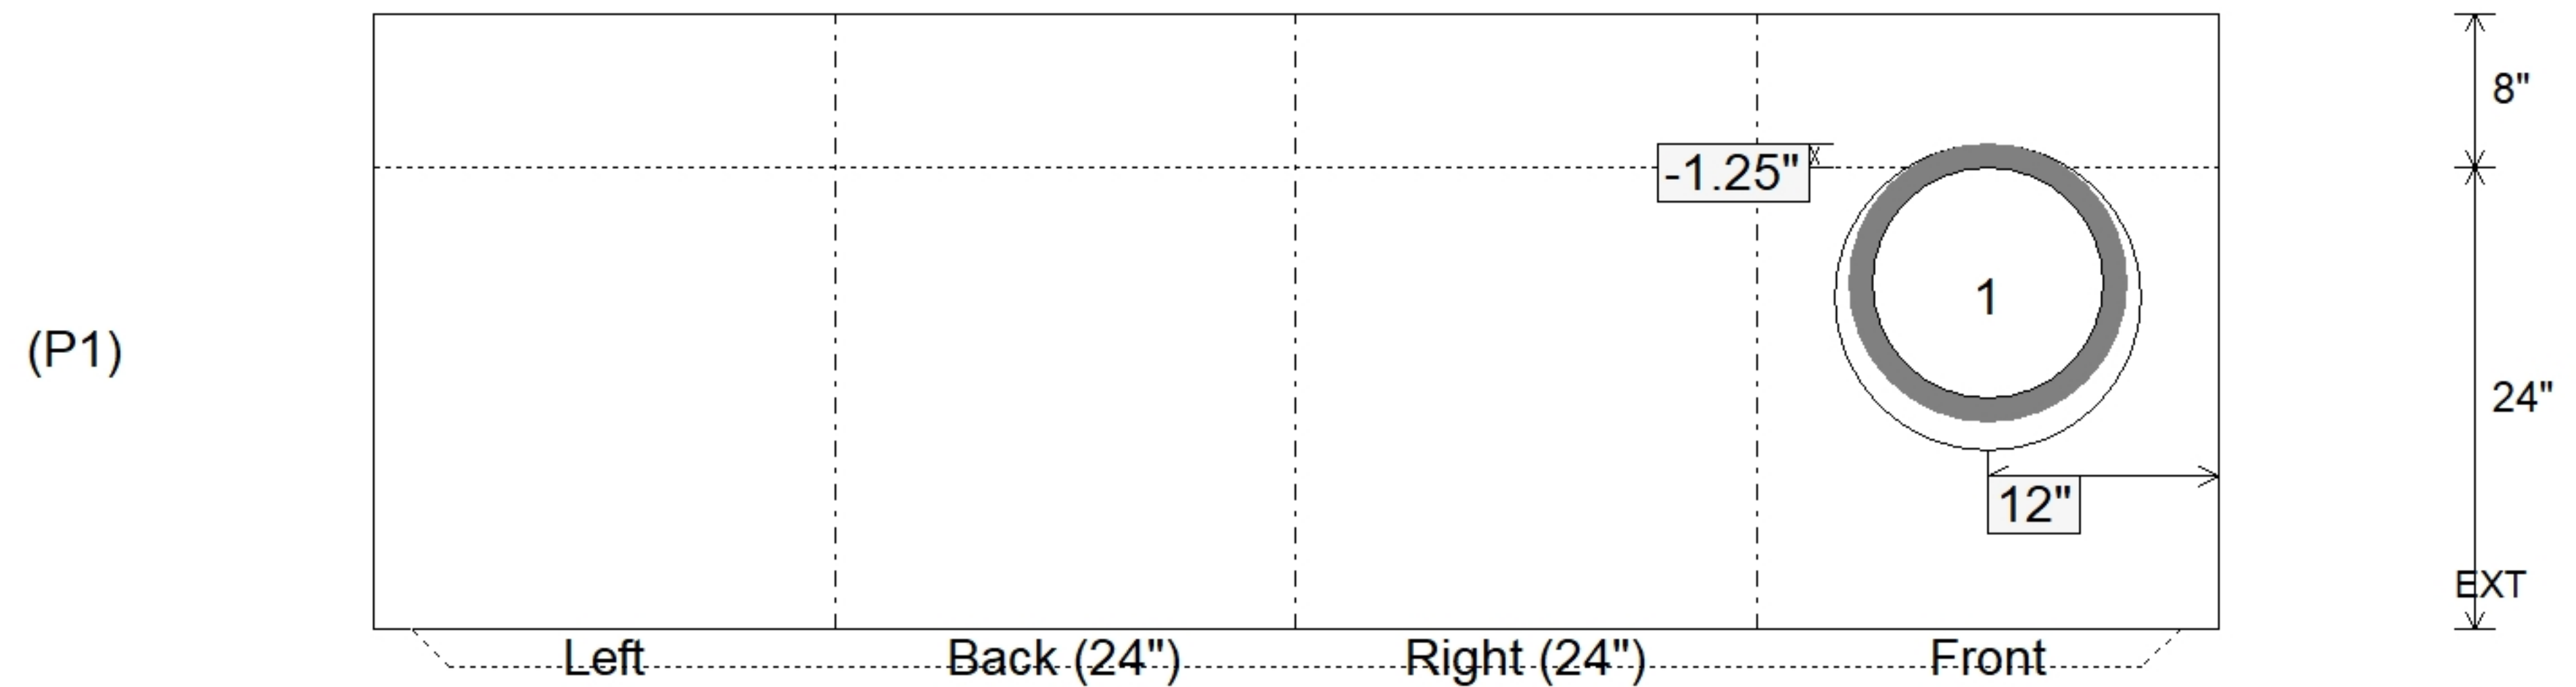

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 24" Height (Ext): 32"	Weight (Net): 3001 lb Volume (Net): 0.77cu.yd
----------------------------------	---------------------------------	----------------------------------------	----------------------------------------	--------------------------------------------------