

Structure ID: OCS-41-55 CB2-3

P2 BX363608R-VF

BOX RISER 8inW, Variable Ht F/G



P3) 36" x 36" - CASTING HEIGHT - 0" P2) 36" x 36" - BOX RISER 8inW, Variable Ht F/G - 32" P1) 36" x 36" - BOX BASE 8inW, 8inF T/n - 36" 1) CASTING - TRASHRACKS LFS-3636-P SQ. Flush Mount Grate 2) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 20 1) Hole - 12 1) Weir n/n - 12"x6"	0 lb 3732 lb 5768 lb 195 lb 0 lb 0 lb 0 lb 0 lb 0 lb	
Structure Total:	9696 lb	

Structure Notes:
 PLAN LABEL: 41
 1. LFS-3636-P SQ. FLUSH MOUNT GRATE PROVIDED BY ICAST.
 2. PER ASTM C913 SPECIFICATIONS.
 3. CONCRETE = 4,500 PSI AT 28 DAYS.
 4. REINFORCING PER ASTM A615 (GRADE 60).
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 839' Rim to Invert: 5.66' Slack: 0" Sump: 0.082" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (⌋)	Offset
Invert 1										
Invert 2										
Invert 3	837'	90°	26"	12" x 6" Weir	12" x 6"	Weir 12"x6"	12" x 6"	12"	6.002"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

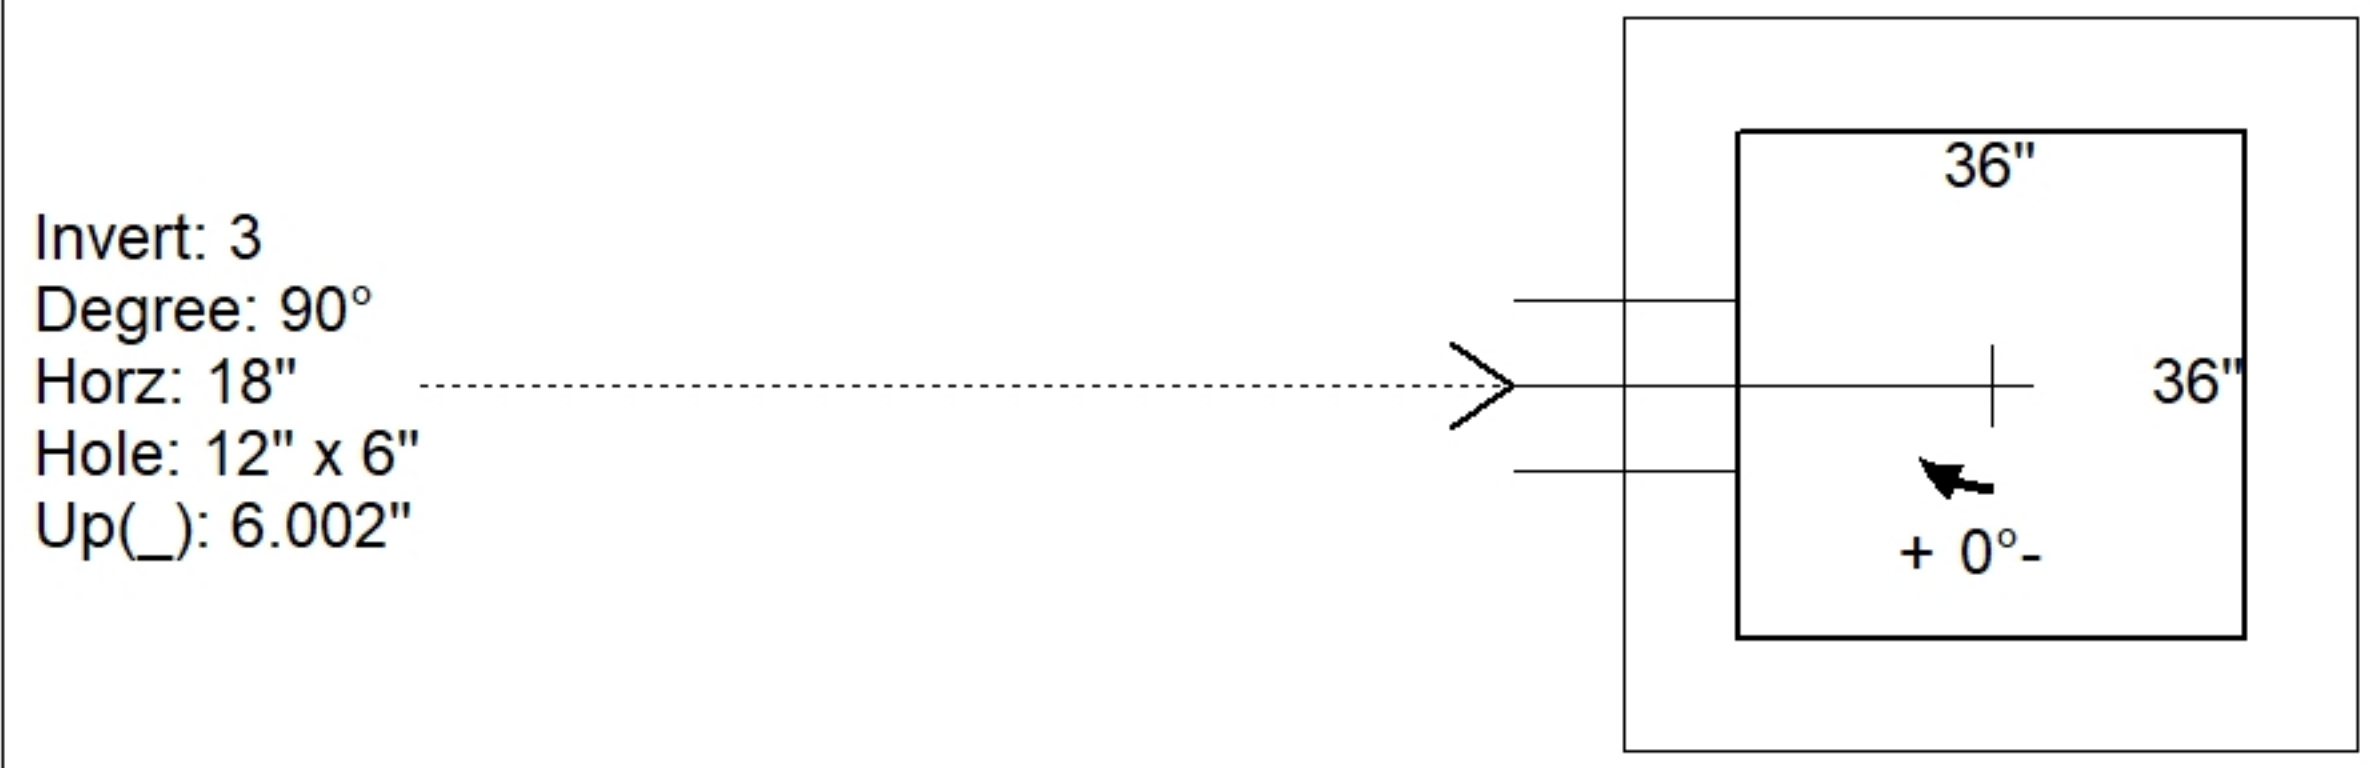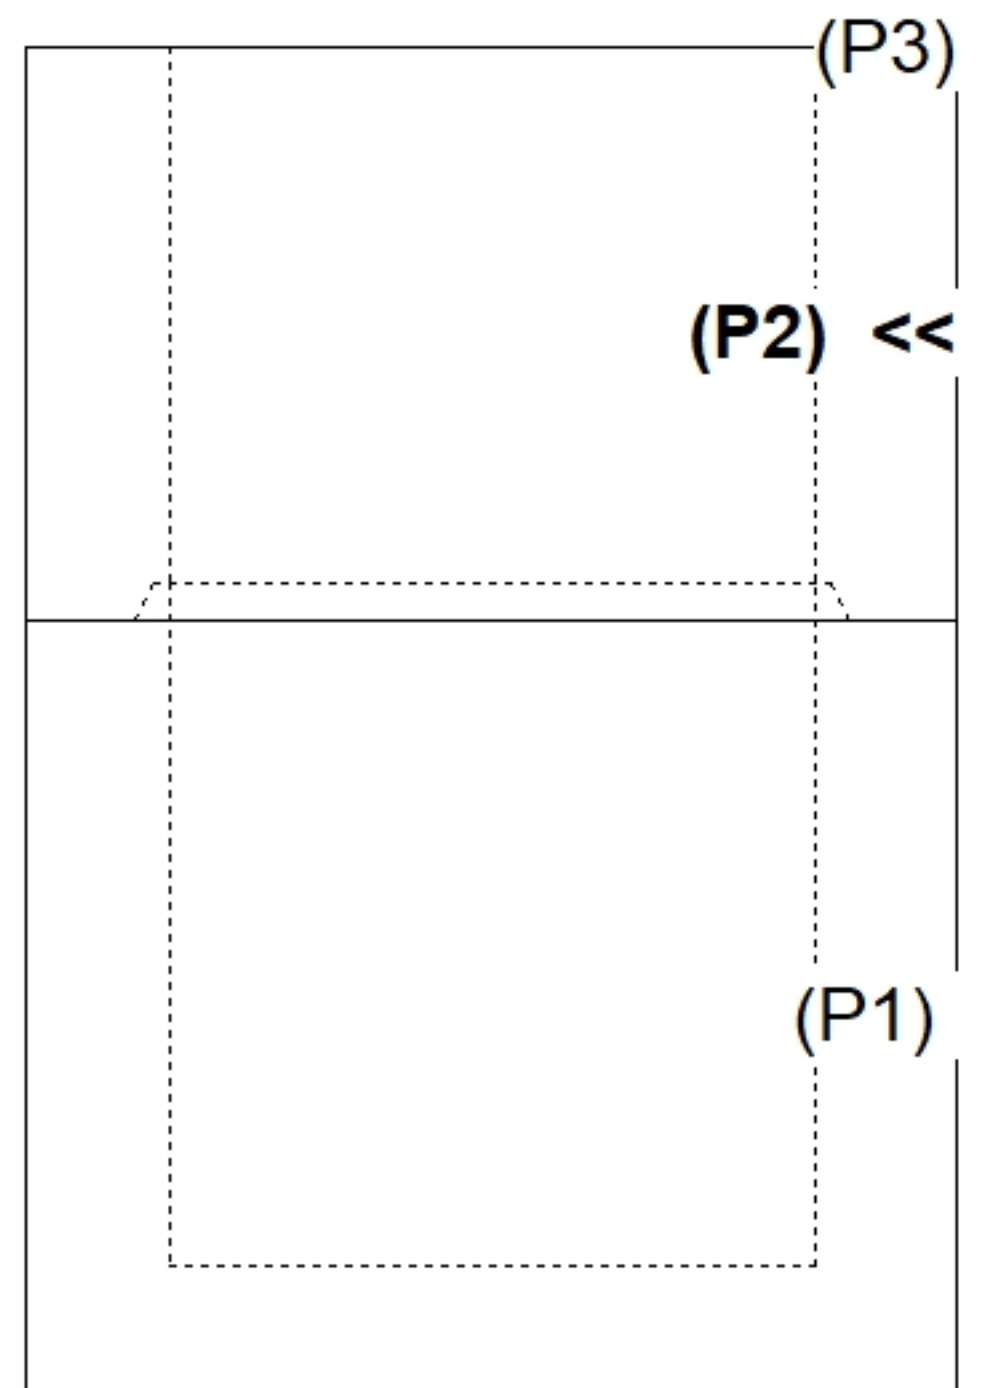

INSIDE WALL DIMENSIONS

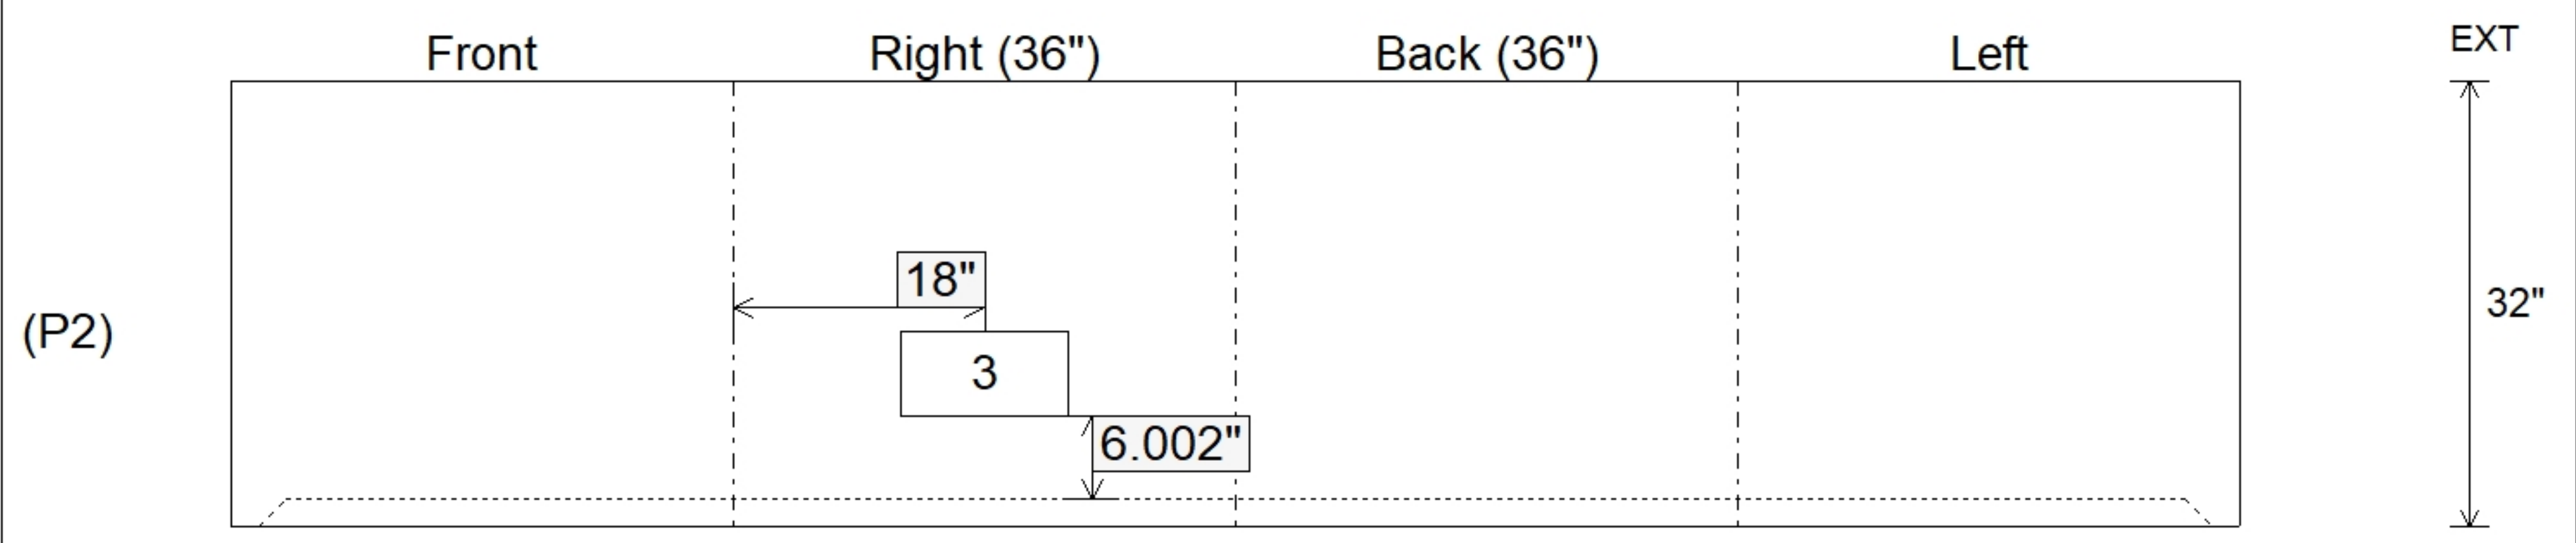

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 32" Height (Ext): 32"	Weight (Net): 3732 lb Volume (Net): 0.95cu.yd
----------------------------------	----------------------------------	----------------------------------------	----------------------------------------	--------------------------------------------------