
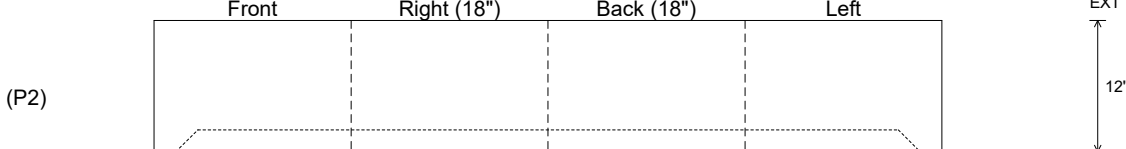


Job Name: 26-1228 - L&N Federal Credit Union Job Location: Louisville, KY 40243 Contractor: H & W Landworks					Plant: 100 5/6/2026 12:05:33 PM		Tech: Jared - A PC: T. Lewis				
Structure ID: S-4-5 YD											
P2 BX1818-06R12			BOX RISER 6inW F/G								
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 18" x 18" - BOX RISER 6inW F/G - 12" P1) 18" x 18" - BOX BASE 6inW, 6inF T/n - 24" 1) CASTING - HOE 165A F/G 2) 18" x 18" - Conseal CS-102 1.00" 1) Hole - 18"						0 lb 580 lb 1517 lb 138 lb 0 lb 0 lb ----- 2235 lb Structure Total:		Structure Notes: 1. PER LOUISVILLE MSD / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STEPS 5. HOE 165-A FRAME & GRATE SUPPLIED BY ICAST			
Rim: 747.27' Rim to Invert: 3.47' Slack: 1.64" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) 											
INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 6" Floor Height: 0"		Height (Int): 12" Height (Ext): 12"		Weight (Net): 580 lb Volume (Net): 0.15cu.yd	