

Plant: Beaver Dam

6/2/2026 2:59:10 PM

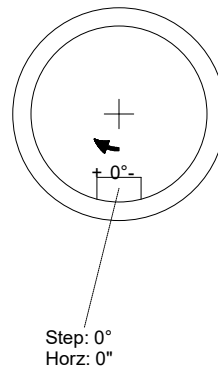
P2 MH048RS60CDARED

0 lb
3116 lb
4192 lb
3749 lb
0 lb
0 lb
1440 lb
305 lb
0 lb
0 lb
16 lb
0 lb

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. ADMIXTURE = CONBLOCK CDA RED.
4. CASTING BY ICAST (HOE MC-350 F/C "SANITARY").

REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

[illegible]

A diagram of a rectangular room. The top wall is labeled with angles: 0°, 90°, 180°, 270°, and 360°. The right wall is labeled with a height of 60". The bottom wall is labeled with a width of 60". The left wall is labeled with a height of 60". The room is divided into four sections by vertical dashed lines at 90°, 180°, and 270°.

Weight (Net): 4192 lb
Volume (Net): 1.07cu.yd