

Plant: Beaver Dam

6/2/2026 2:59:07 PM

P2 MH048RS48CDARED

- P4) 24" - CASTING HEIGHT - 7"
- P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 36"
- P2) 48" - MH RISER w/ConBlock-CDA Red T/G - 48"
- P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 30"
- 1) JOINT WRAP - 0.065"x6"x50" CONSEAL CS212
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT
- 1) CASTING - HOE MC-350 F/C Sanitary
- 2) 48" - Conseal CS-102 1.00" (Double)
- 1) 24" - Conseal CS-102 1.00" (Double)
- 1) PSX - 12-08 NYLO
- 1) PSX - 8QRS-S NYLO
- 9) MH Step ML-10-TDS-NCR - 10"

0 lb
2251 lb
3353 lb
3357 lb
0 lb
0 lb
1440 lb
305 lb
0 lb
0 lb
8 lb
6 lb
0 lb

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. ADMIXTURE = CONBLOCK CDA RED.
4. CASTING BY ICAST (HOE MC-350 F/C "SANITARY").

- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 1248' Rim to Invert: 10.1' Slack: 2.2" Sump: 2" Step Position: 0°

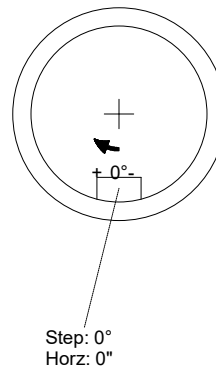
[illegible]

Diagram illustrating the layout of a 48" wide panel, divided into four vertical sections labeled 0°, 90°, 180°, 270°, and 360°. The top and bottom edges are angled. A vertical dimension line on the right indicates a height of 48". The label "EXT" is at the top right.

Weight (Net): 3353 lb
Volume (Net): 0.86cu.yd