

**Structure ID: B8-3**

**P2 MH072RS36**

**MH RISER T/G**

P5) 24" - CASTING HEIGHT - 7" P4) 72" - MH FLAT LID w/24" CC Hole F/G - 15" P3) 72" - MH RISER T/G - 66" P2) 72" - MH RISER T/G - 36" P1) 72" - MH BASE T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MCB-375-B F/Bar Grt 1) ASSEMBLY REQUIRED 1) CASTING - HOE MC-375 F/C Storm 3) 72" - Conseal CS-102 1.00" (Double) 2) Hole - 26	0 lb 5097 lb 8986 lb 5248 lb 7398 lb 0 lb 0 lb 250 lb 0 lb 271 lb 0 lb 0 lb ----- Structure Total: 27250 lb
--	--

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-375 "STORM")
4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE.
5. P2 & P3 RISERS TO BE MECHANICALLY ATTACHED BEFORE INTERNAL INSTALLATION/DELIVERY.



REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.


Rim: 470.41'    Rim to Invert: 5.61'    Slack: 0.32"    Sump: 81"    Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

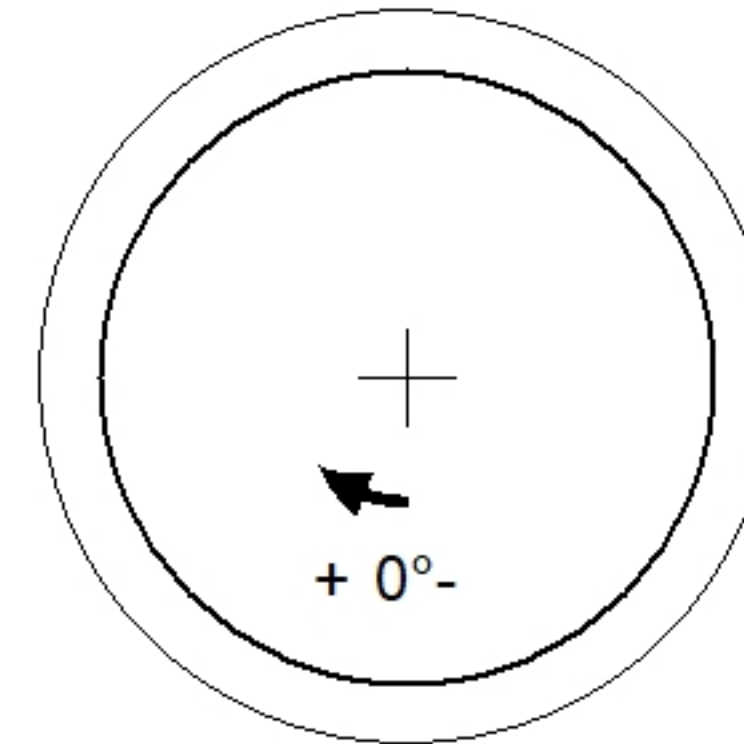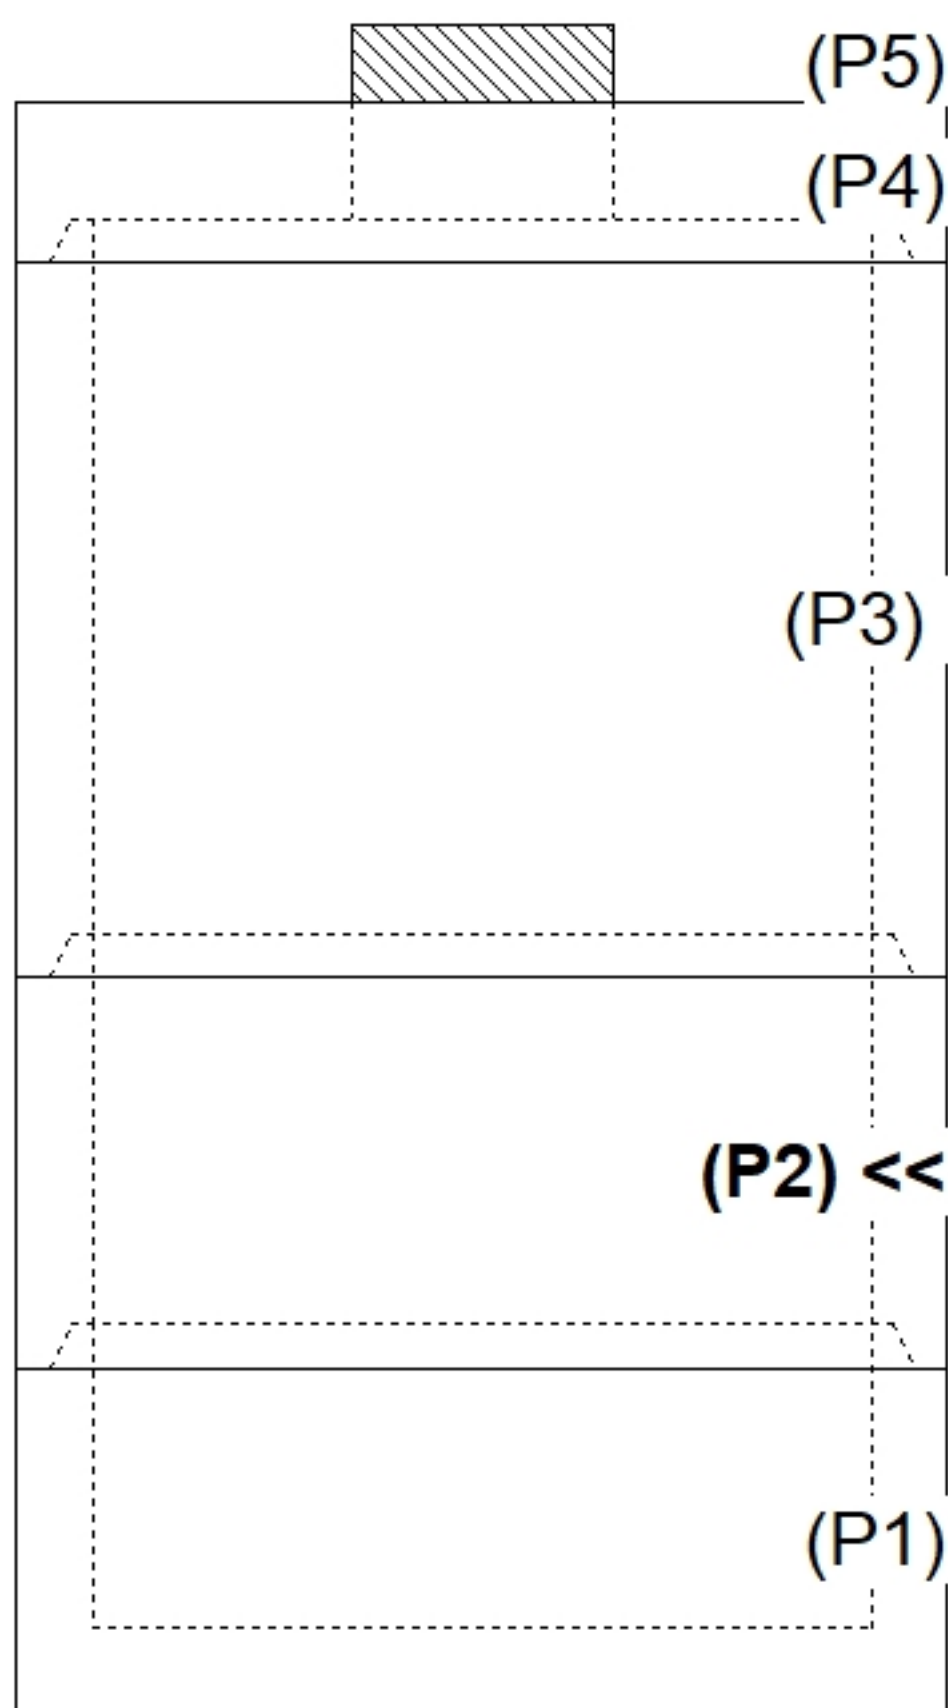

**INSIDE WALL DIMENSIONS**

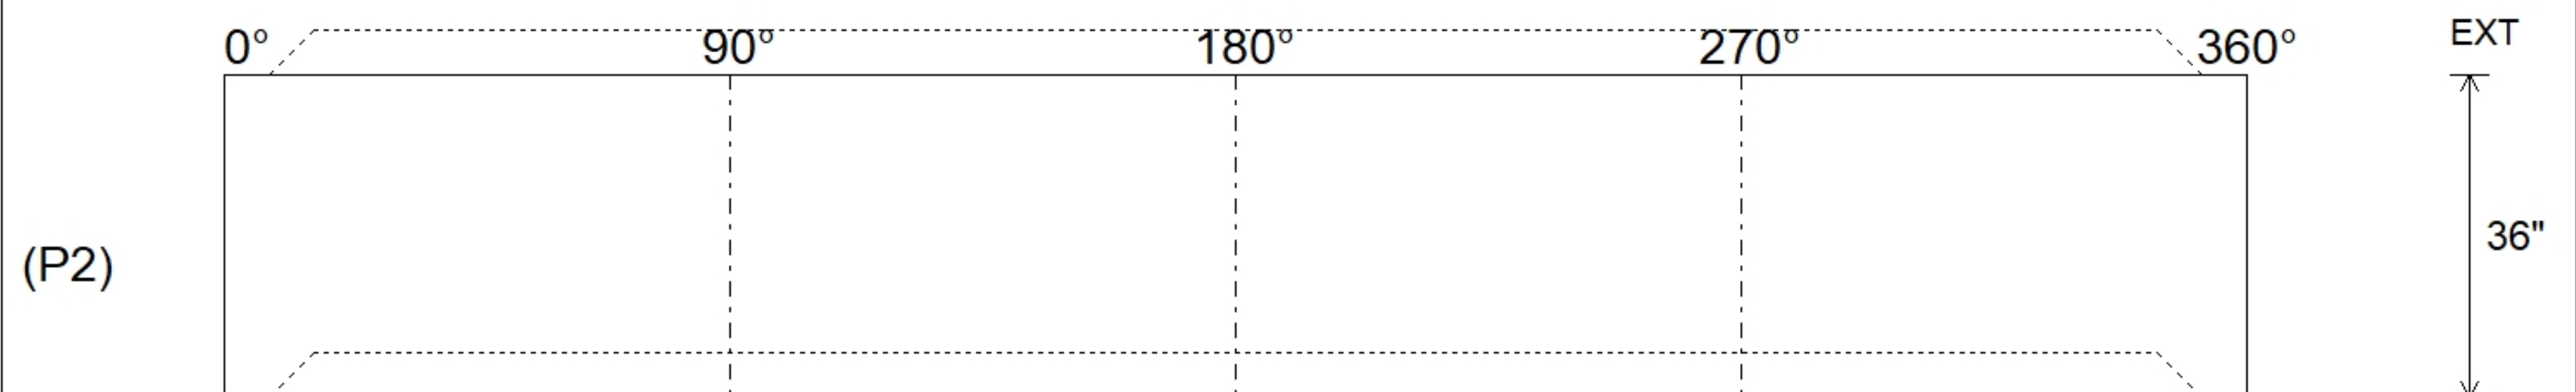

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 7" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"
Coating (Ext):			Weight (Net): 5248 lb Volume (Net): 1.34cu.yd