

Structure ID: 10-CS-5

P3 MH060RS12



MH RISER T/G

P5) 30" - CASTING HEIGHT - 4" P4) 60" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 13" P3) 60" - MH RISER T/G - 12" P2) 60" - MH RISER T/G - 72" P1) 60" - MH BASE T/n - 18" 1) CVSTENCILING 1) ASSEMBLY REQUIRED 3) 60" - Conseal CS-102 1.00" 3) Hole - 16	0 lb 2589 lb 1253 lb 7207 lb 4612 lb 0 lb 0 lb 0 lb 0 lb 0 lb	Structure Notes: 4" CASTING BY OTHERS LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE ICAST TO INSTALL THE INTERNALS CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE
Structure Total: 15661 lb		


Rim: 705.6' Rim to Invert: 6.1' Slack: 11.2" Sump: 57" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

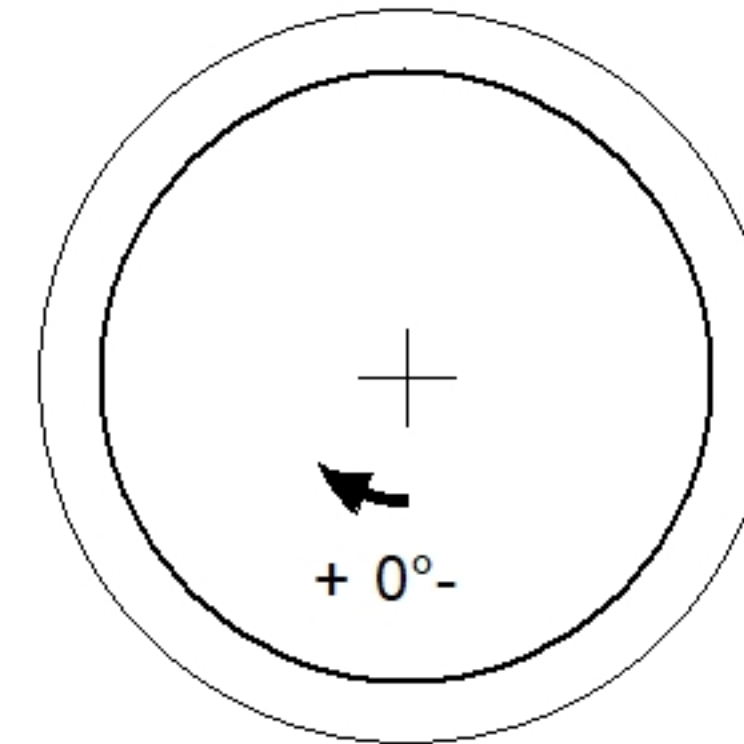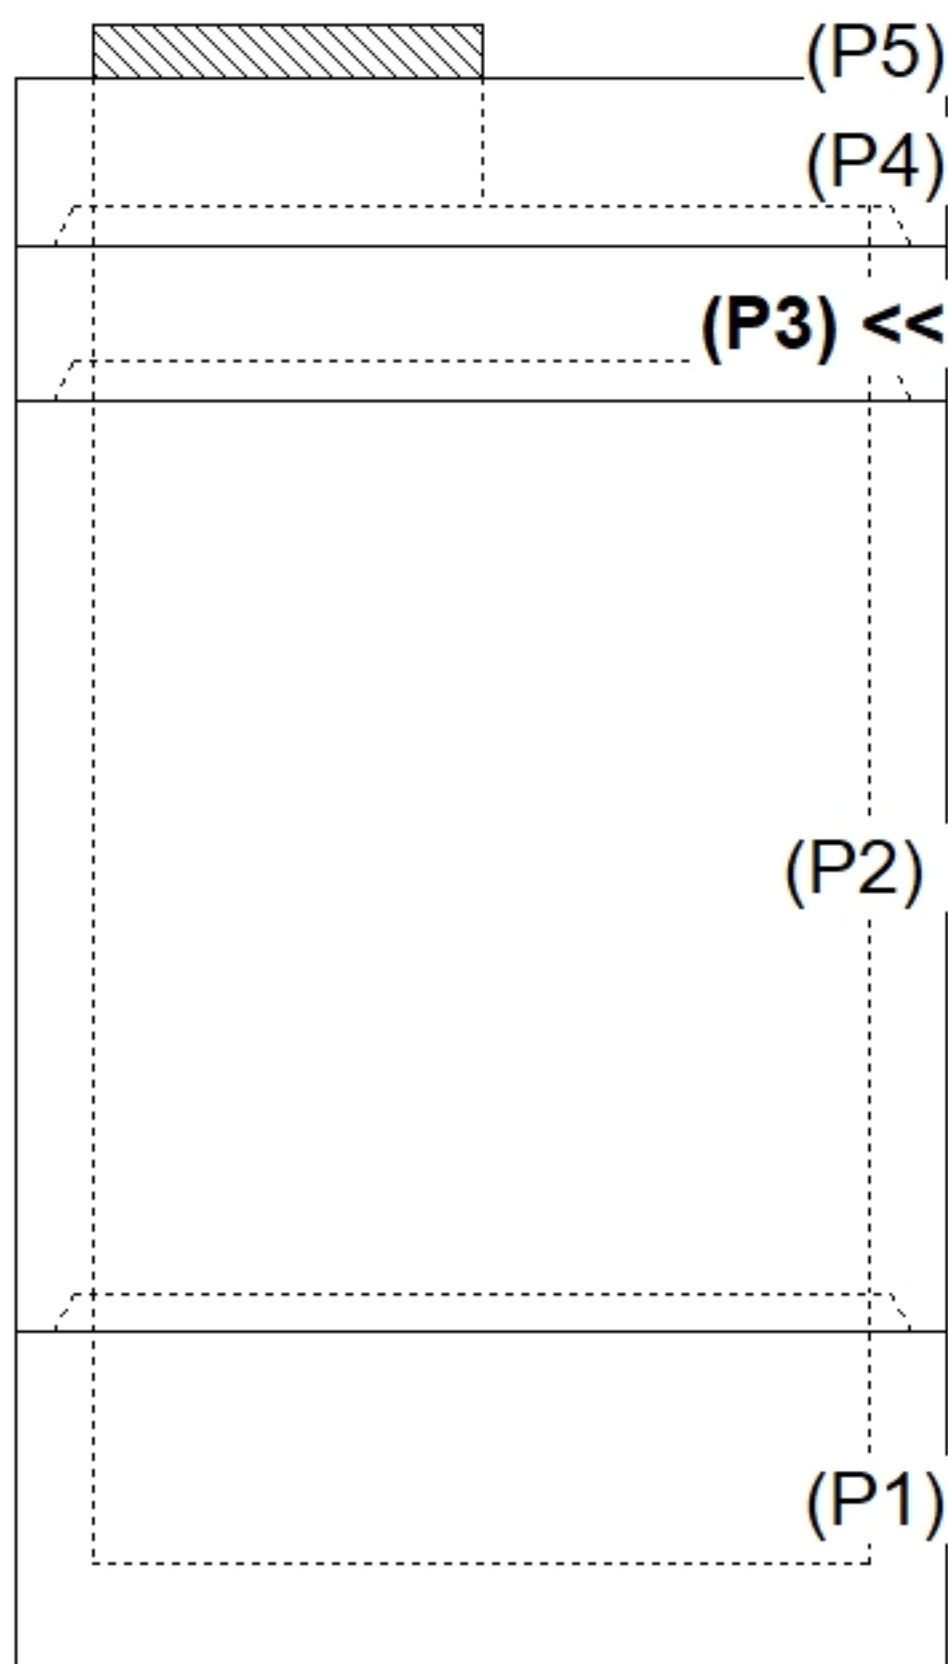

INSIDE WALL DIMENSIONS

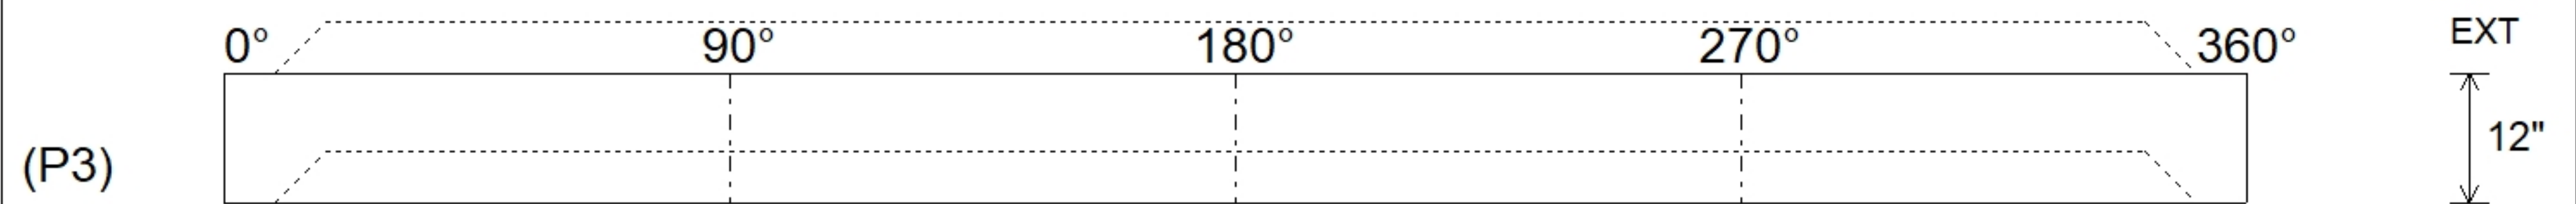

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 12" Height (Ext): 12"
Coating (Ext):			Weight (Net): 1253 lb Volume (Net): 0.32cu.yd