

Job Name: 26-1453 Clarksville, TN SPC13A	Plant: Beaver Dam	Tech: J. Coppage	
Job Location: Clarksville, TN Contractor: Cleary Construction, Inc.	4/23/2026 7:30:05 AM	PC: C. Goff	

**Structure ID: Wet Well-11-11**

**P3 MH120RS96CDARED**

**MH RISER w/CONBLOCK CDA RED T/G**

P6) 30" x 36" - HATCH (CAST FLUSH) - 0"	0 lb
P5) 120" - MH FLAT TOP w/2x 30"x36" Hatches CONBLOCK CDA RED F/G - 18"	15235 lb
P4) 120" - MH RISER w/CONBLOCK CDA RED T/G - 84"	31843 lb
P3) 120" - MH RISER w/CONBLOCK CDA RED T/G - 96"	36468 lb
P2) 120" - MH RISER w/CONBLOCK CDA RED T/G - 96"	36399 lb
P1) 120" - MH BASE SLAB w/CONBLOCK CDA RED T/n - 12"	22837 lb
4) JOINT WRAP - 12" WD x 120" MAC WRAP	0 lb
2) HATCH (Alum.) - HALLIDAY W1S 30"x36"	138 lb
1) This Structure Includes a Cast-in Item - Halliday W1S 30" x 36" Hatches (Supplied by iCast)	0 lb
1) ADMIXTURE CONBLOCK CDA RED	0 lb
4) 120" - Conseal CS-231 1.00" (Double)	0 lb
2) Z-Lok - C107-3	2 lb
1) A-Lok - 0285	1 lb
Structure Total:	142923 lb



**Structure Notes:**

- PER ASTM C-478 SPECIFICATIONS
- CONCRETE: 4,000 PSI AT 28 DAYS
- REINFORCEMENT: PER ASTM A615
- NO STEPS
- CONBLOCK CDA RED ADMIXTURE REQUIRED
- 2 EA. HALLIDAY W1S 30" X 36" HATCHES SUPPLIED BY ICAS - TO BE CAST INTO FLAT LID
- LIFTERS: 4 EA. 8CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AT 0°, 90°, 180°, & 270°, MIN. 24" FROM TOP OF WALLS


Rim: 543.5'    Rim to Invert: 17.73'    Slack: -6"    Sump: 75.24"    Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

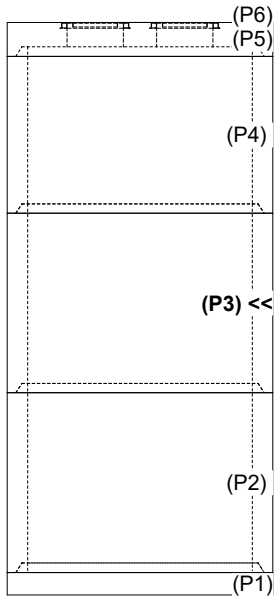

**INSIDE WALL DIMENSIONS**

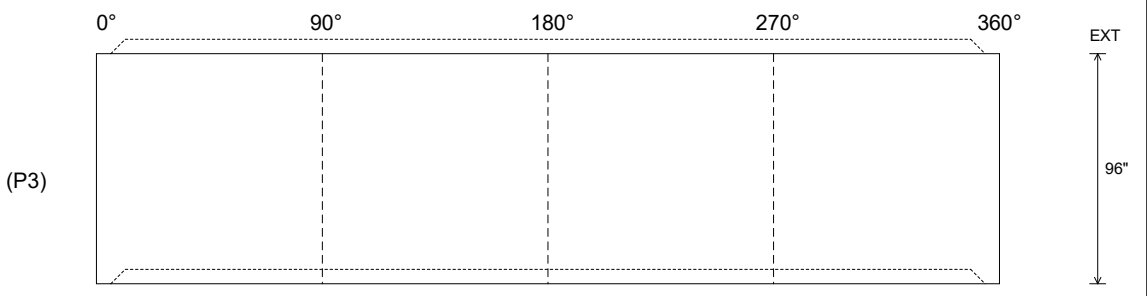

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 11" Floor Height: 0"	Height (Int): 96" Height (Ext): 96"	Weight (Net): 36468 lb Volume (Net): 9.32cu.yd
----------------------------------	------------------------------------	---	--	---