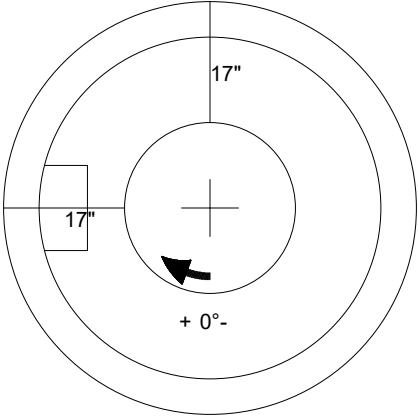



Job Name: 26-1466 - Lower Mill Creek HWDW Protection		Plant: 100	Tech: Jared - F	
Job Location: Cincinnati, OH		7/22/2026 12:41:37 PM	PC: E. Bradley	
Structure ID: 240-9 SS-MH				
P5 MH048CCN36		CON CONE w/24" HOLE F/G		
P6) 24" - CASTING HEIGHT - 7.25" P5) 48" - CON CONE w/24" HOLE F/G - 36" P4) 48" - MH RISER T/G - 60" P3) 48" - MH RISER T/G - 60" P2) 48" - MH RISER T/G - 72" P1) 48" - MH BASE (08"F) T/n - 36" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 4) 48" - Hamilton Kent MH Gasket 1) Kor-N-Seal2 - S206-22 1) Kor-N-Seal2 - S206-28 20) MH Step ML-10-TDS-NCR - 10"		0 lb 2252 lb 4192 lb 4192 lb 5030 lb 3851 lb 0 lb 0 lb 0 lb 1440 lb 0 lb 6 lb 6 lb 0 lb ----- 20969 lb	<u>Structure Notes:</u> . 1. PER CINCINNATI MSD / ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING SUPPLIED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
 48" - CON CONE w/24" HOLE F/G - 36" - (P5)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 2252 lb Volume (Net): 0.57cu.yd