
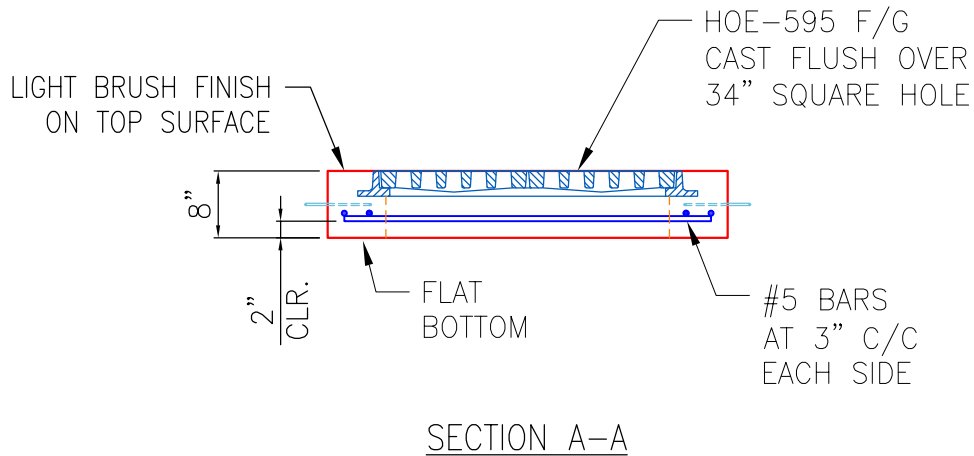


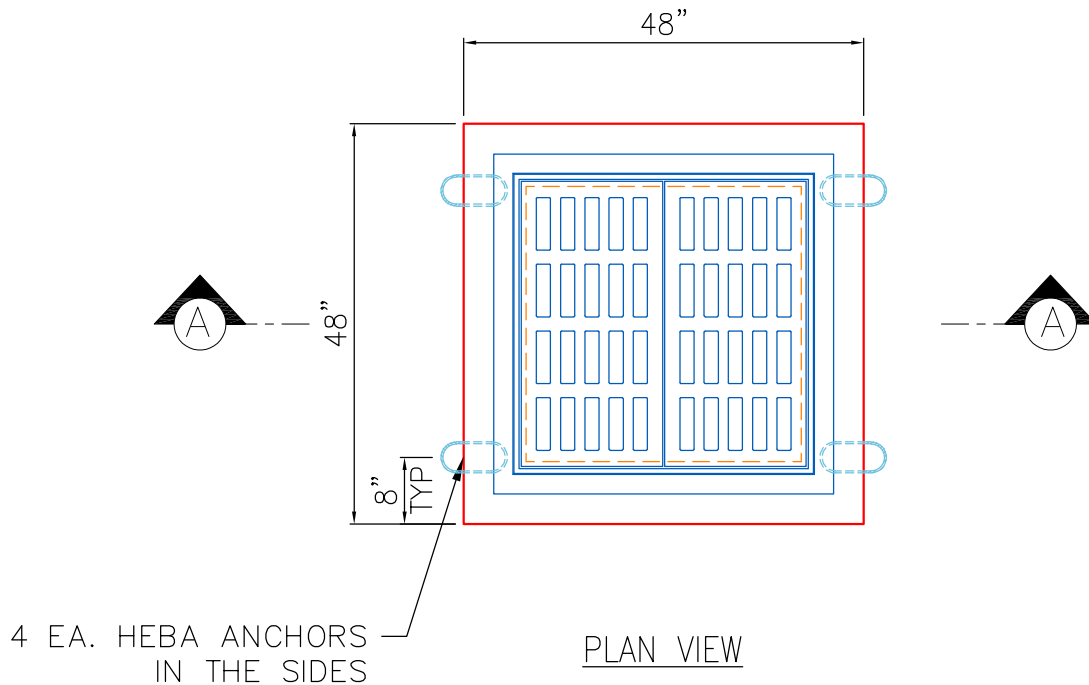

GENERAL NOTES:

1. PER ASTM C913 SPECIFICATIONS
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. REINFORCING PER ASTM A615 (GRADE 60).
#5 BARS AT 3" C.C.E.W.

#5 BAR CUT LIST
8 EA. @ 44" LONG

PRODUCTION WORK ORDER

PRODUCT I.D.:
CTS

DESCRIPTION: CUSTOM TOP SLAB
48"x48"x8"H 6"W w HOE-595



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ NO STEPS.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 1,182 LBS.

TOP SECTION JOINT: FLAT

BASE SECTION JOINT: FLAT

QC CHECK INITIALS:

CUSTOMER: BARTON MALOW COMPANY

PROJECT: FORD LAP

STRUCTURE: 48x48 TOP SLAB w HOE-595

ORDER NO: 26-1487

CHECK: B. SMITH

DRAWING: J. HORSLEY

DATE: 07/08/26

SCALE: NTS

PG. 1 of 1