

Structure ID: AD 302

P1 BX3636-06BAVF

BOX BASE 6inW, 6inF, Variable Ht F/n

P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 6inW, 6inF, Variable Ht F/n - 30" 1) CASTING - TRASHRACKS LFG-3636-P Flat Inlet Grate 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 24" 1) Orifice - 7.5"	0 lb 3447 lb 230 lb 0 lb 0 lb 0 lb ----- Structure Total: 3677 lb
---	--




Structure Notes:
 1. PER ASTM C913 SPECIFICATIONS.
 2. CONCRETE = 4,500 PSI AT 28 DAYS.
 3. LFG-3636-P PLAIN FLAT INLET GRATE - BY ICAST
 REINFORCING PER ASTM A615 (GRADE 60).

Rim: 369.05' Rim to Invert: 2.25' Slack: 0" Sump: 6" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	366.8'	0°	24"	18" HDPE	21.2"	Hole 24	24"	24"	4.375"	0"
Invert 2	366.8'	180°	24"	7.5" Orifice	7.5"	Orifice 7.5"	7.5"	7.5"	6"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

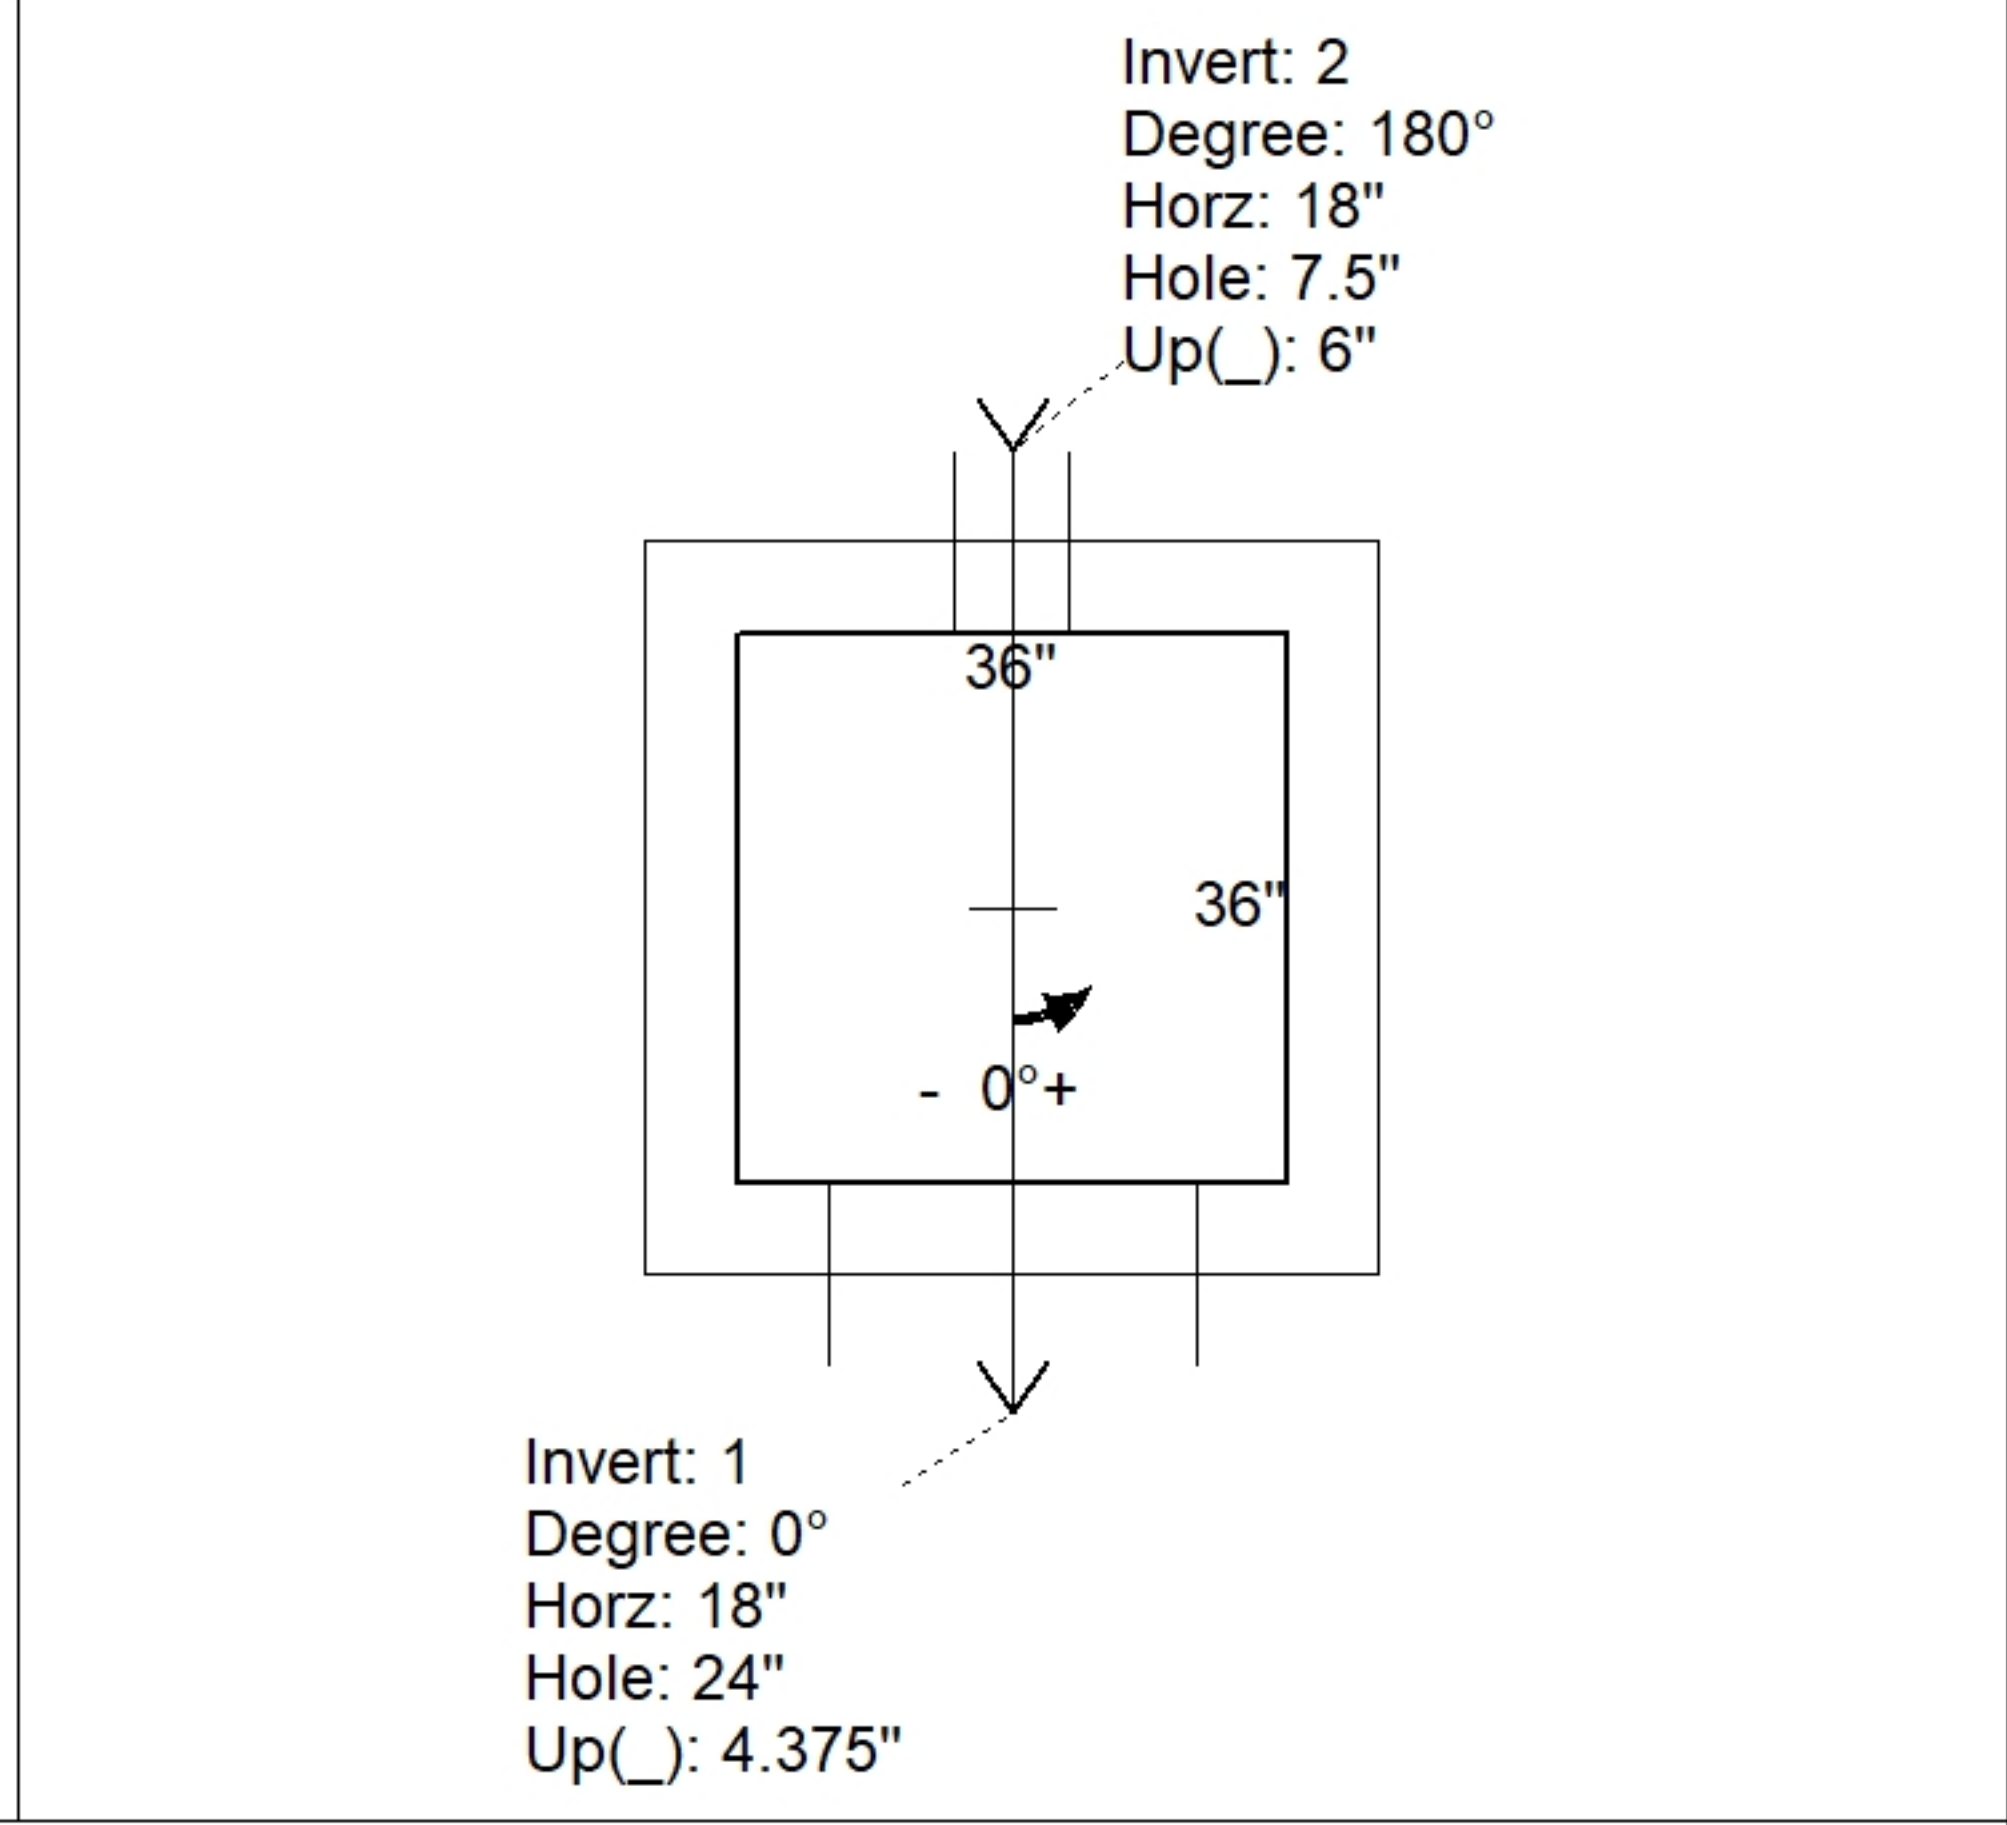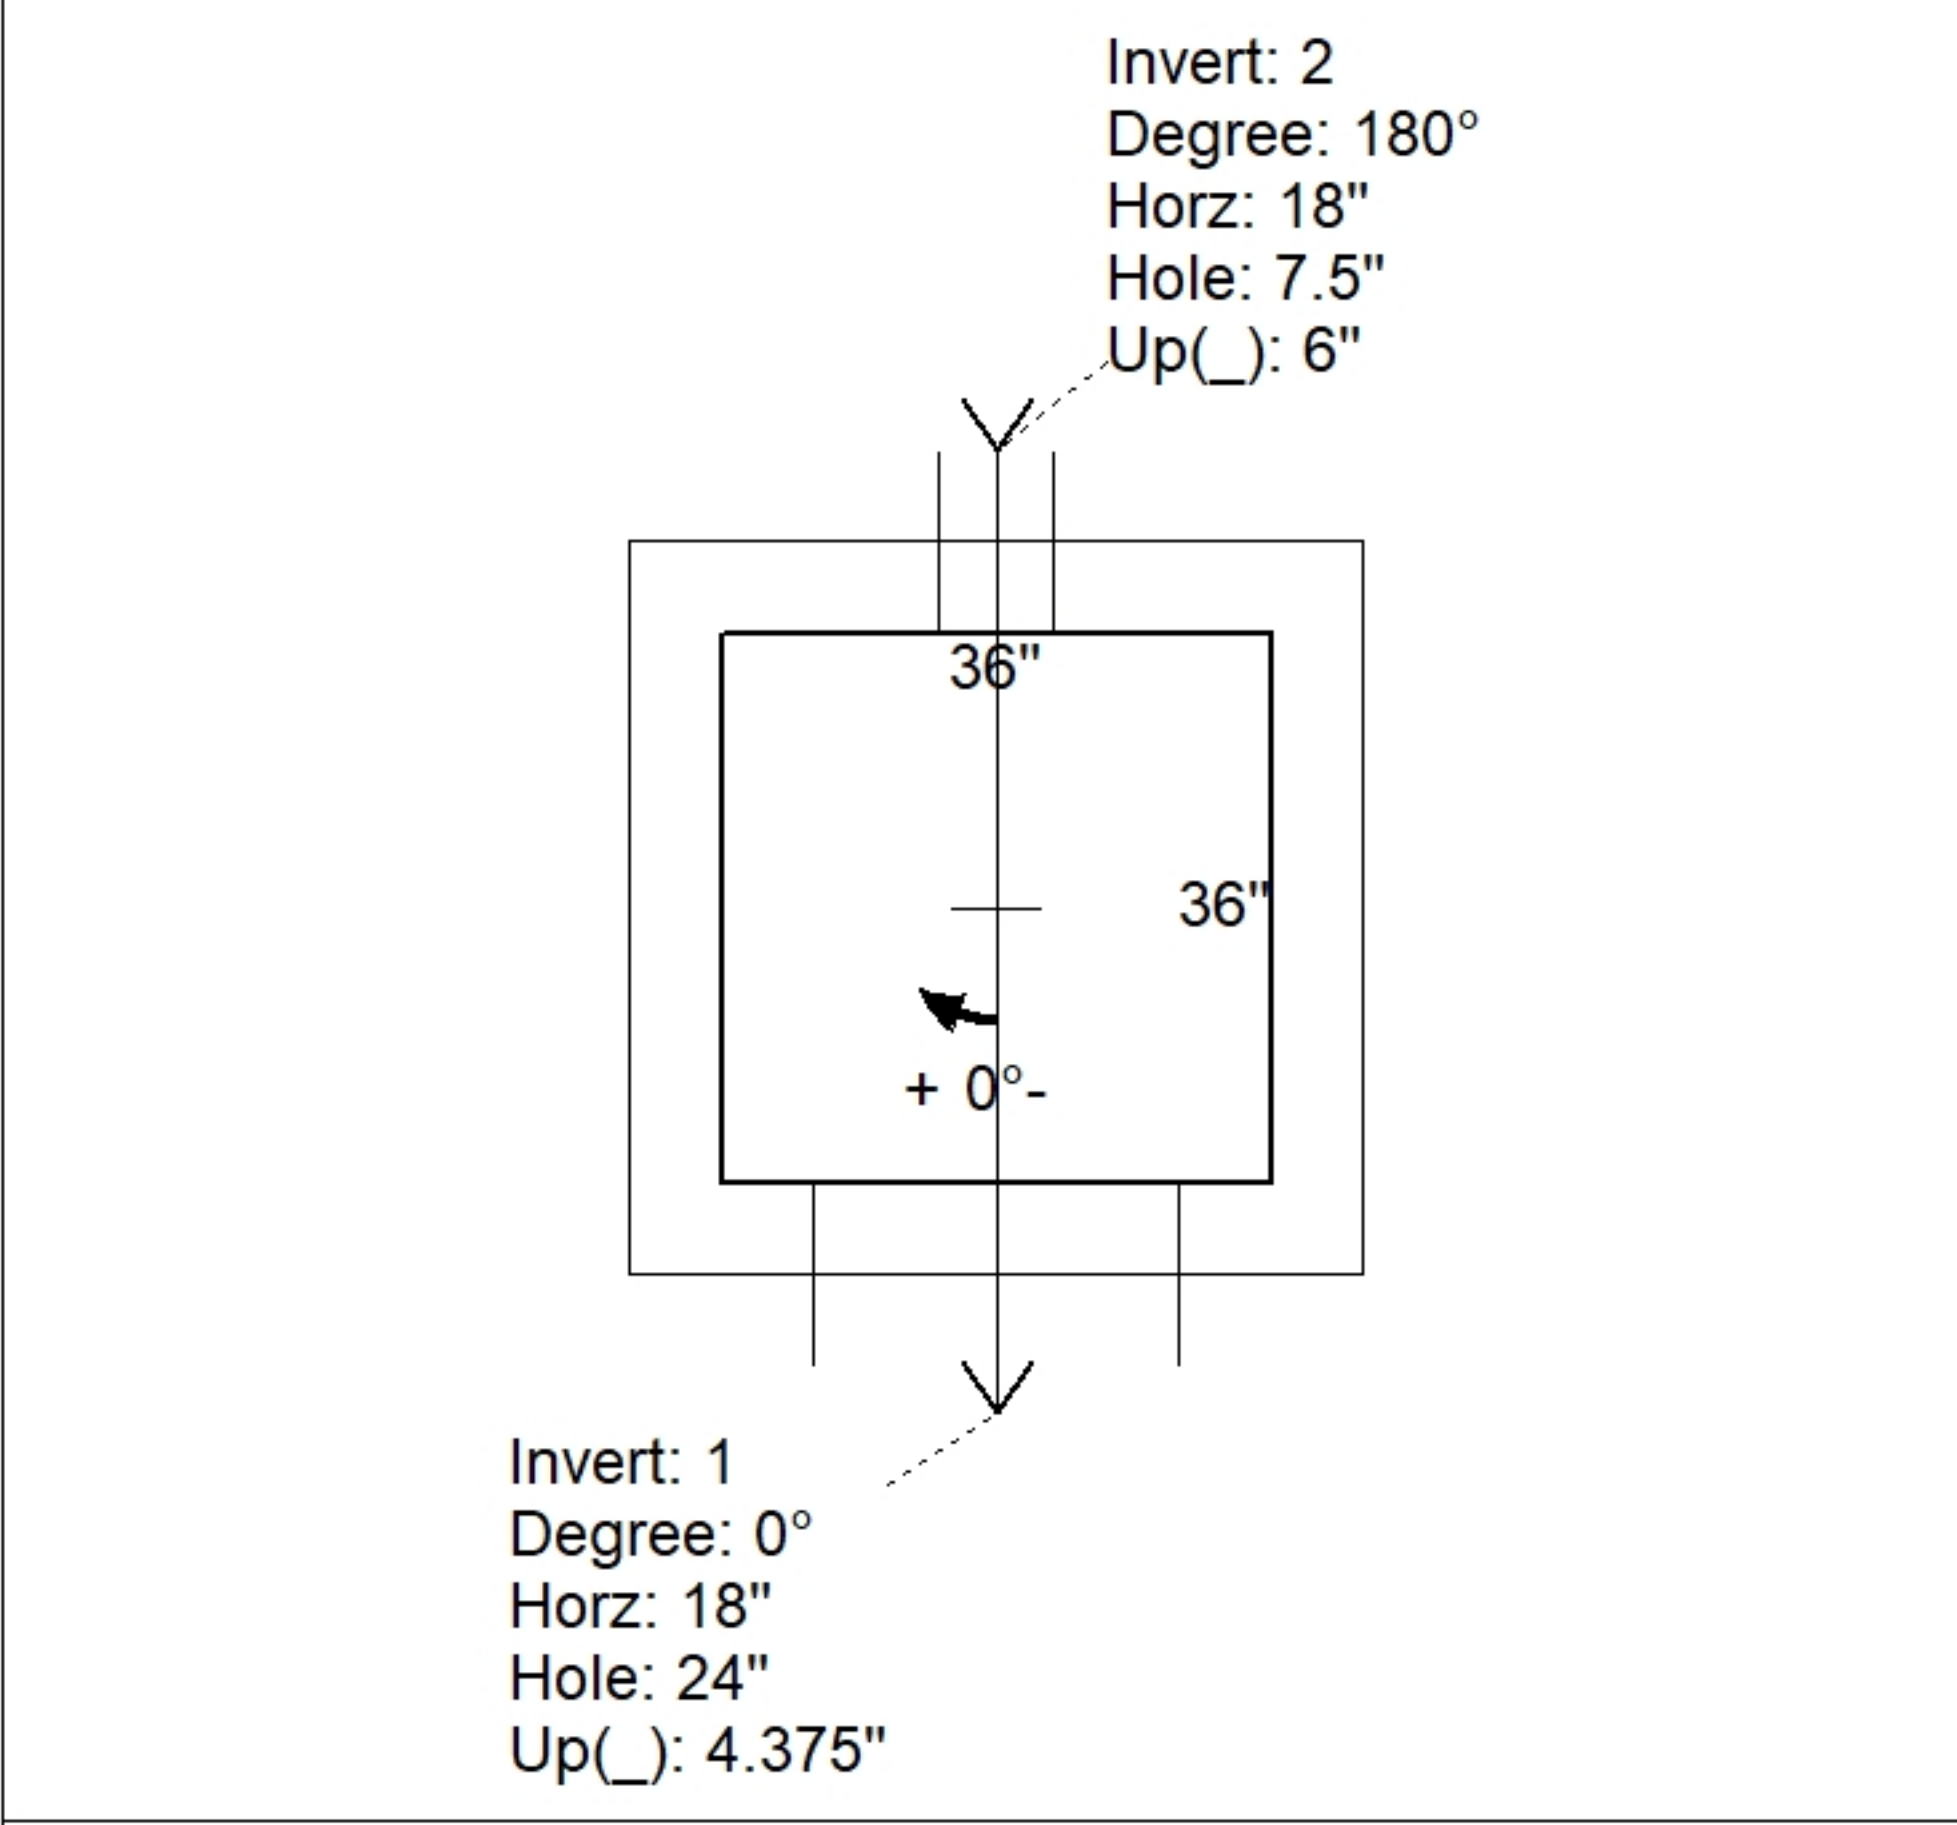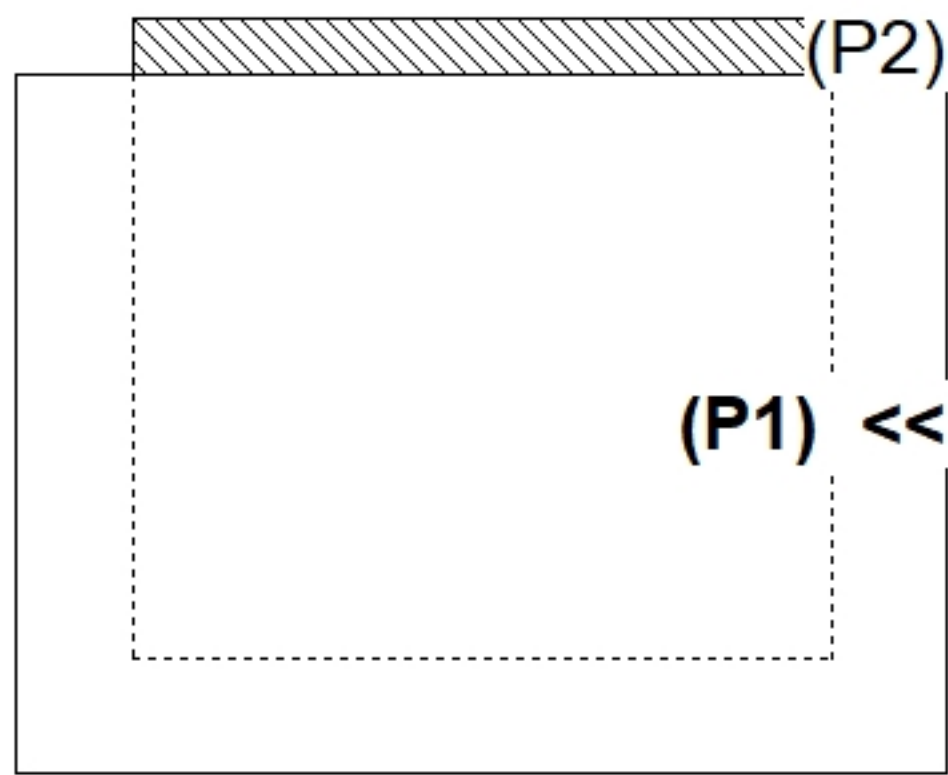

INSIDE WALL DIMENSIONS

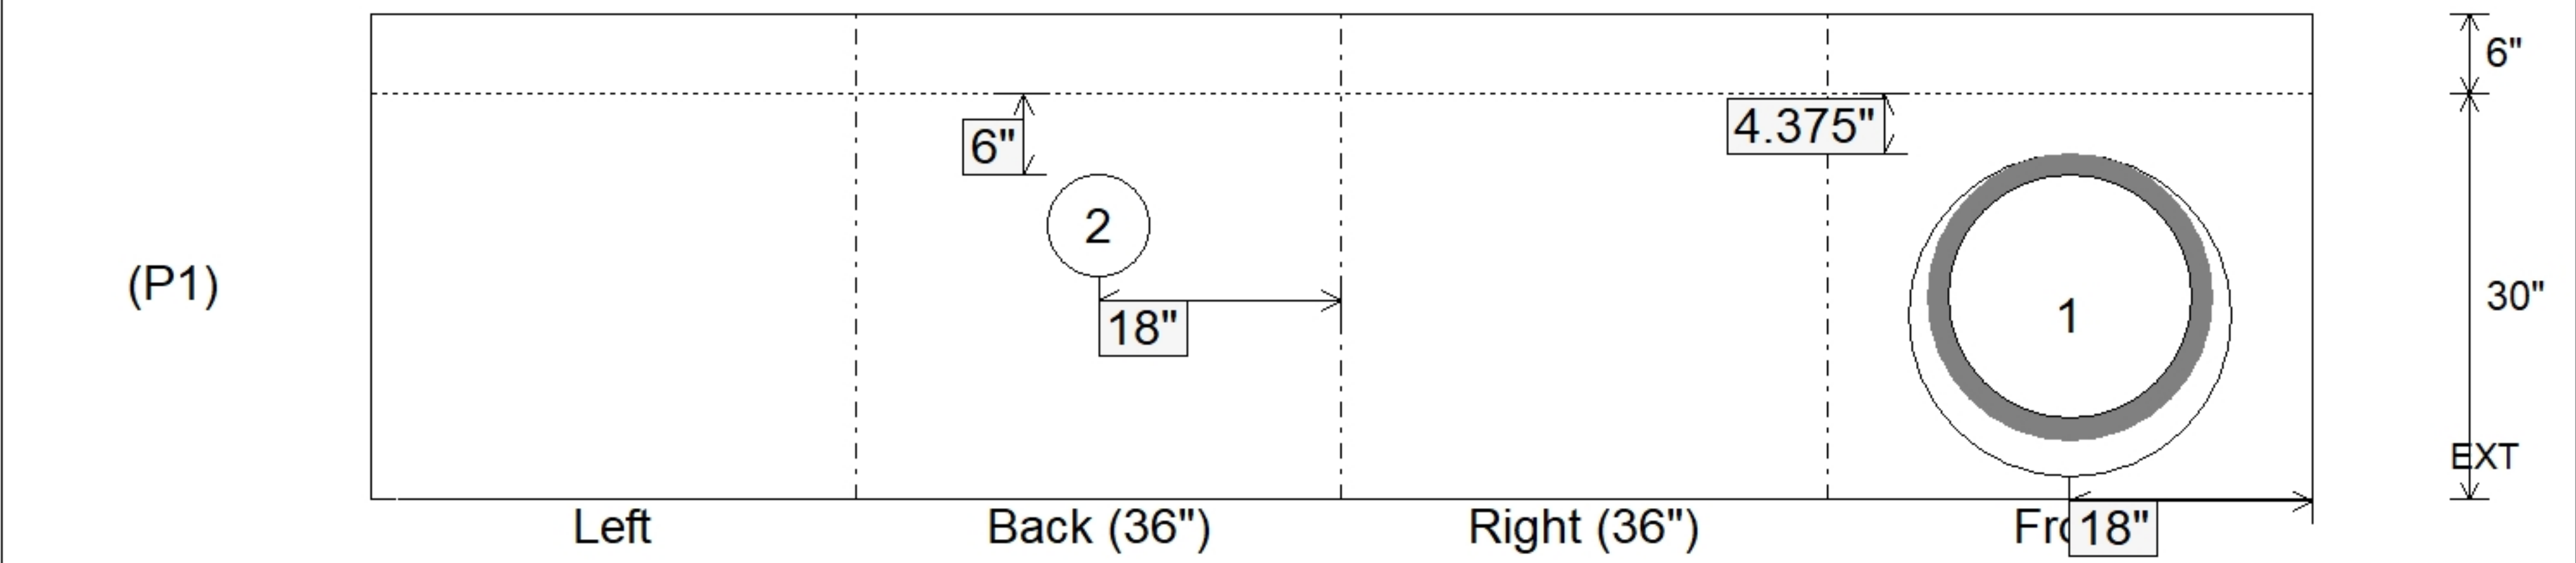

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 30" Height (Ext): 36"	Weight (Net): 3447 lb Volume (Net): 0.88cu.yd
----------------------------------	-------------------------------	--	--	--