

P1 BX2424-08BAVF

BOX BASE 8inW, 8inF, Variable Ht T/n

1660 lb
2650 lb
3044 lb
290 lb
0 lb
0 lb
0 lb

7644 lb

Structure Notes: ** KYTC STATE PROJECT **

1. PER KYTC CBI TYPE B / ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE KY-345 F/G)

REINFORCING PER ASTM A615 (GRADE 60).




- TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 887.27' Rim to Invert: 4.58' Slack: 0.96" Sump: 0" Step Position:


[illegible]

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

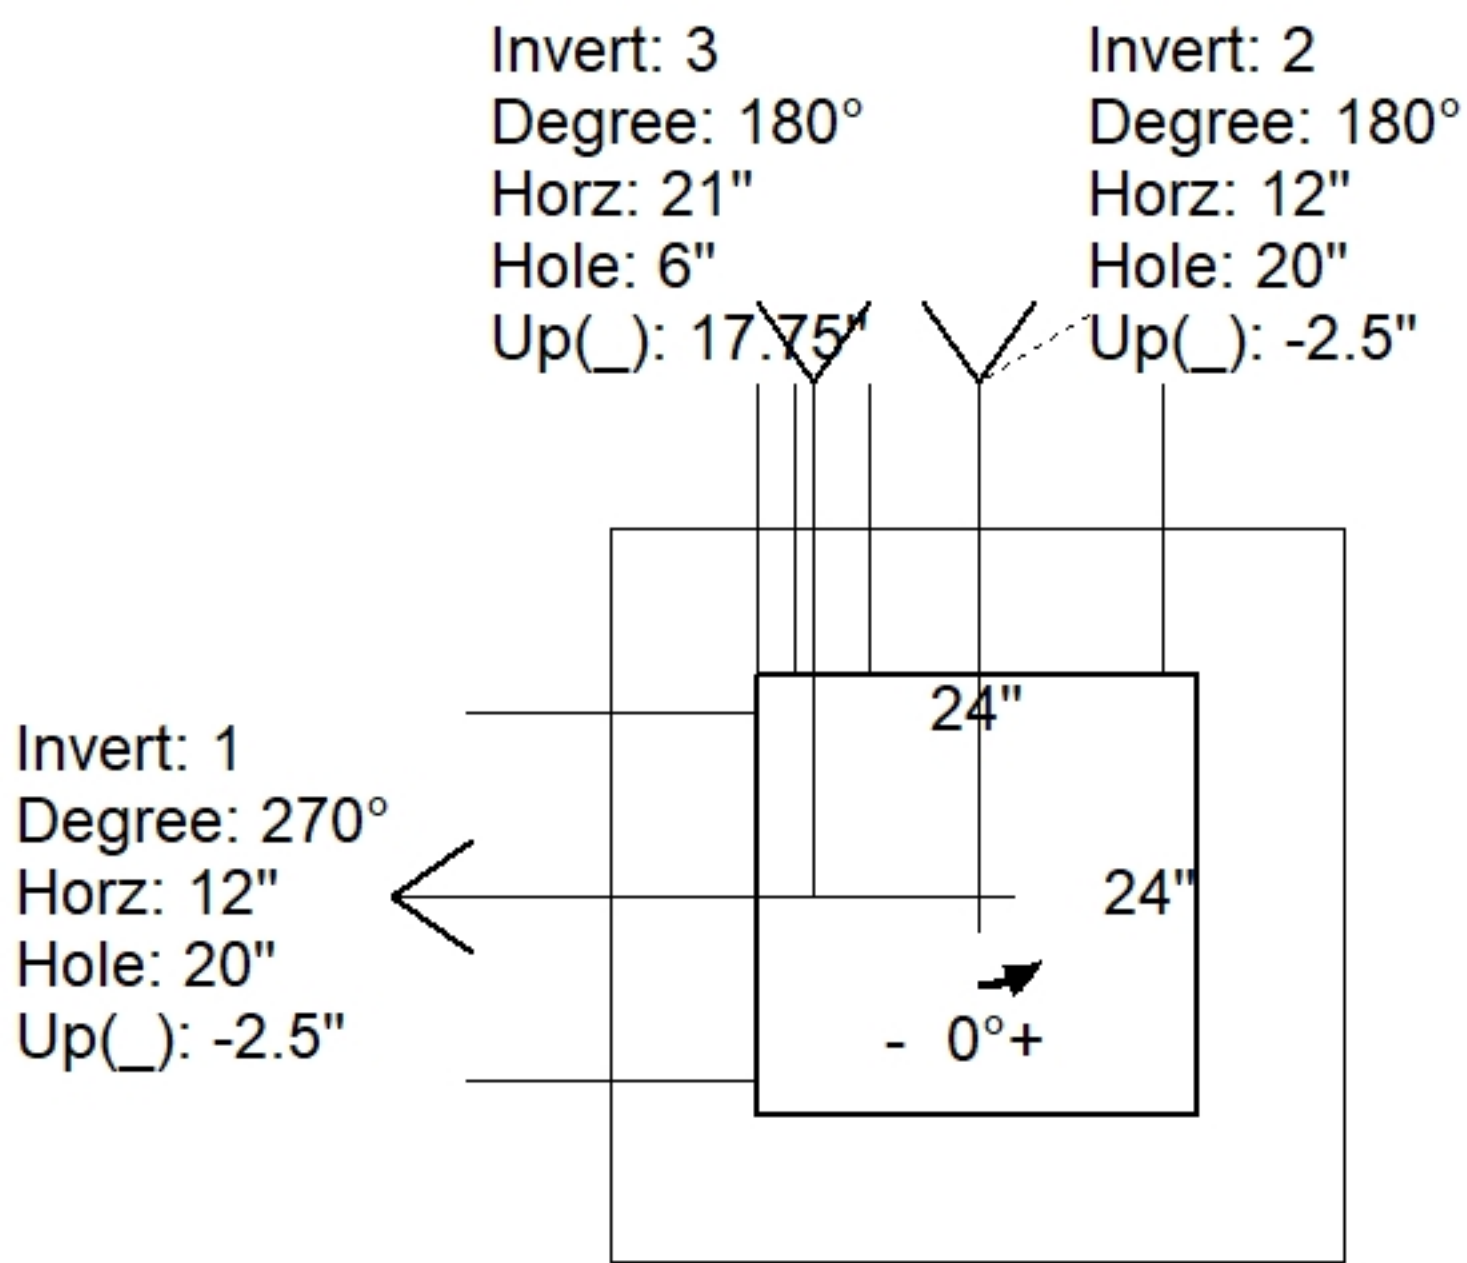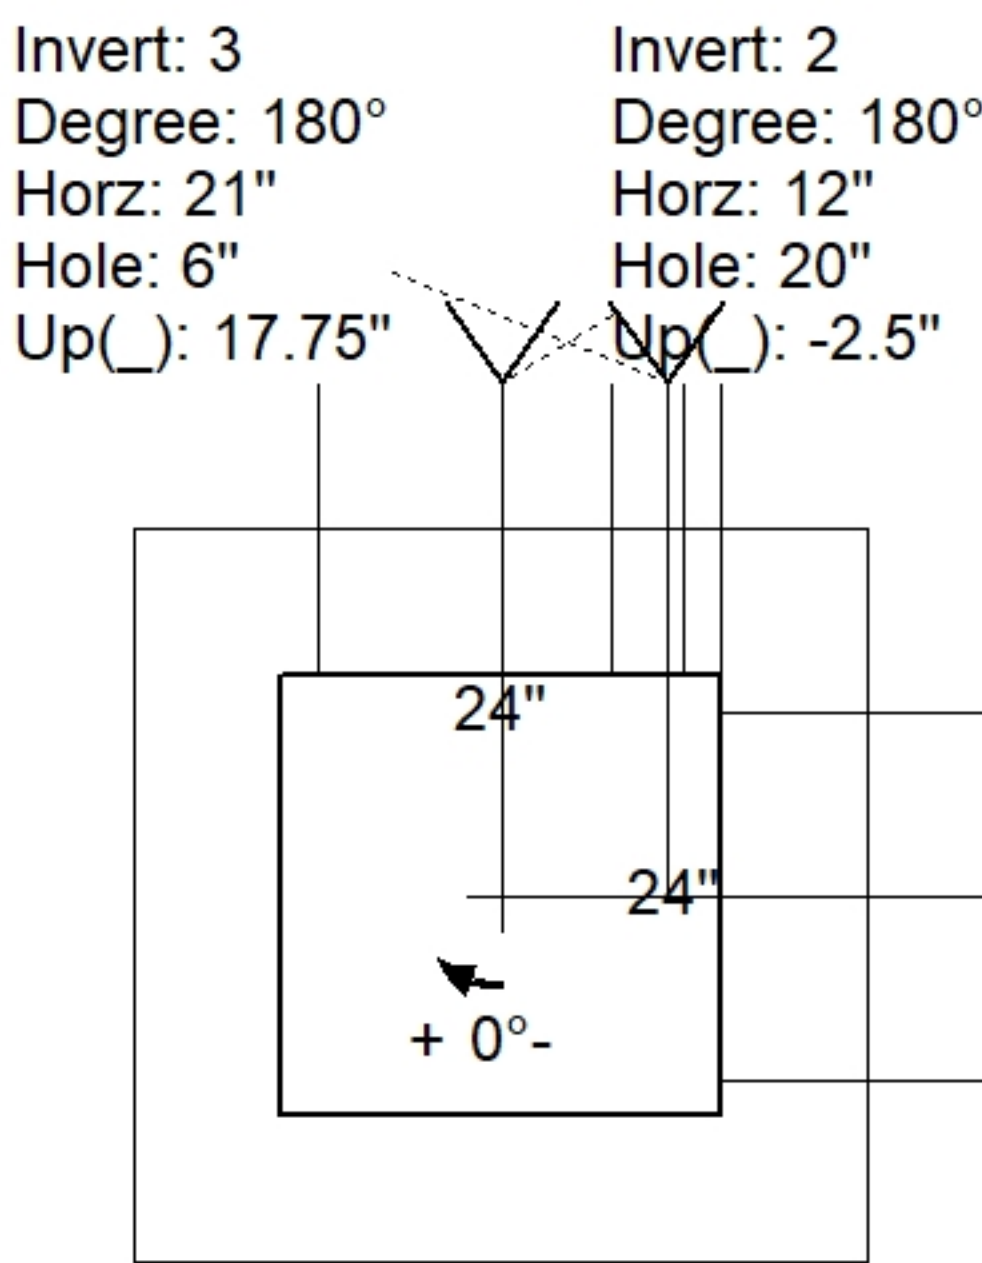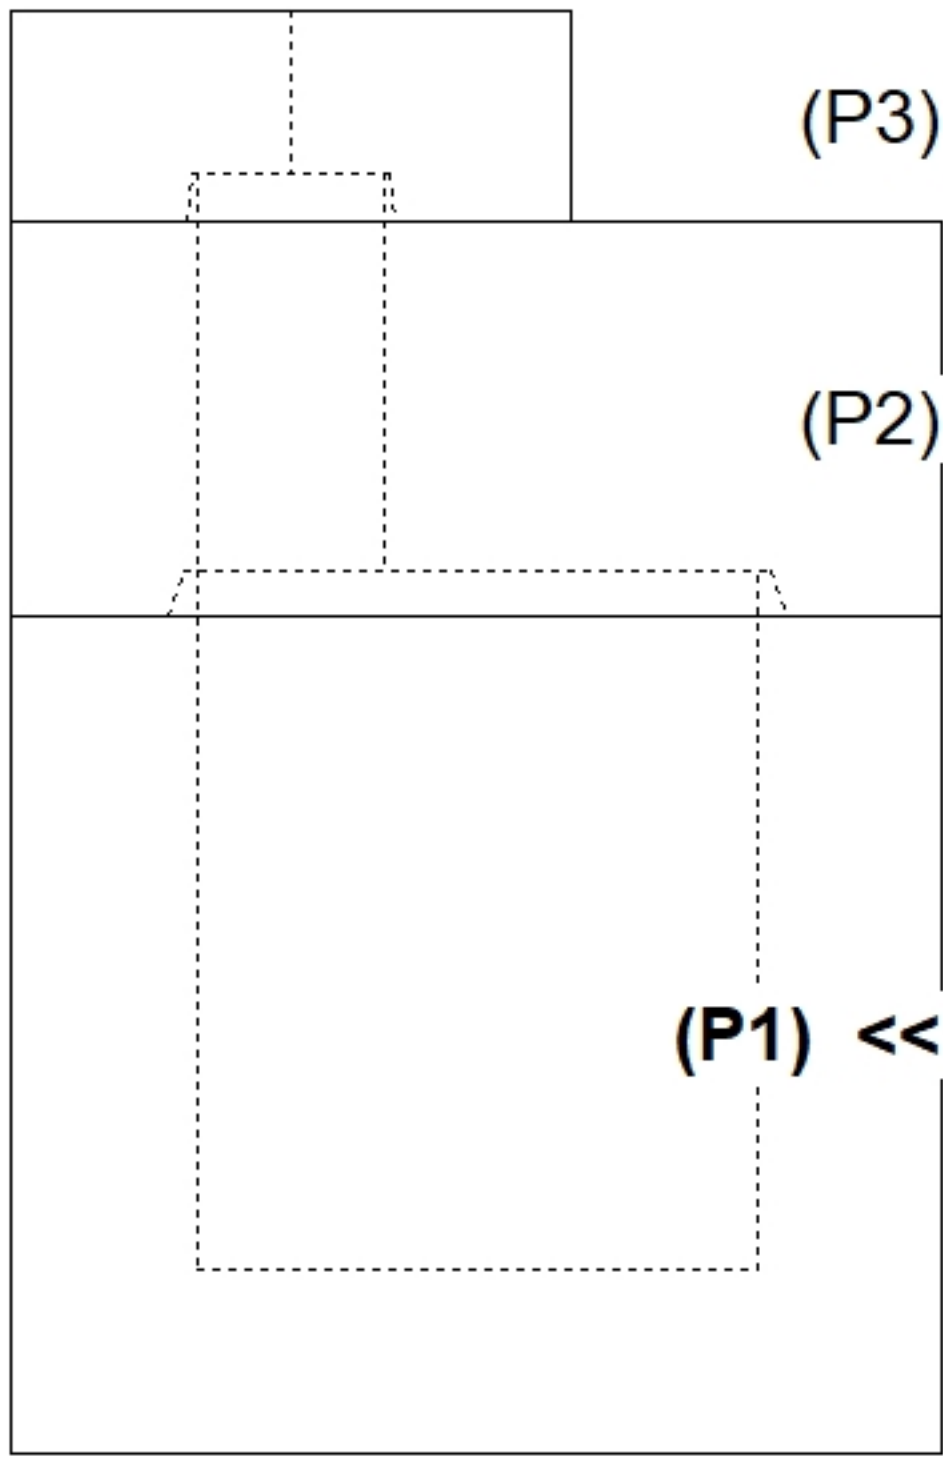

INSIDE WALL DIMENSIONS

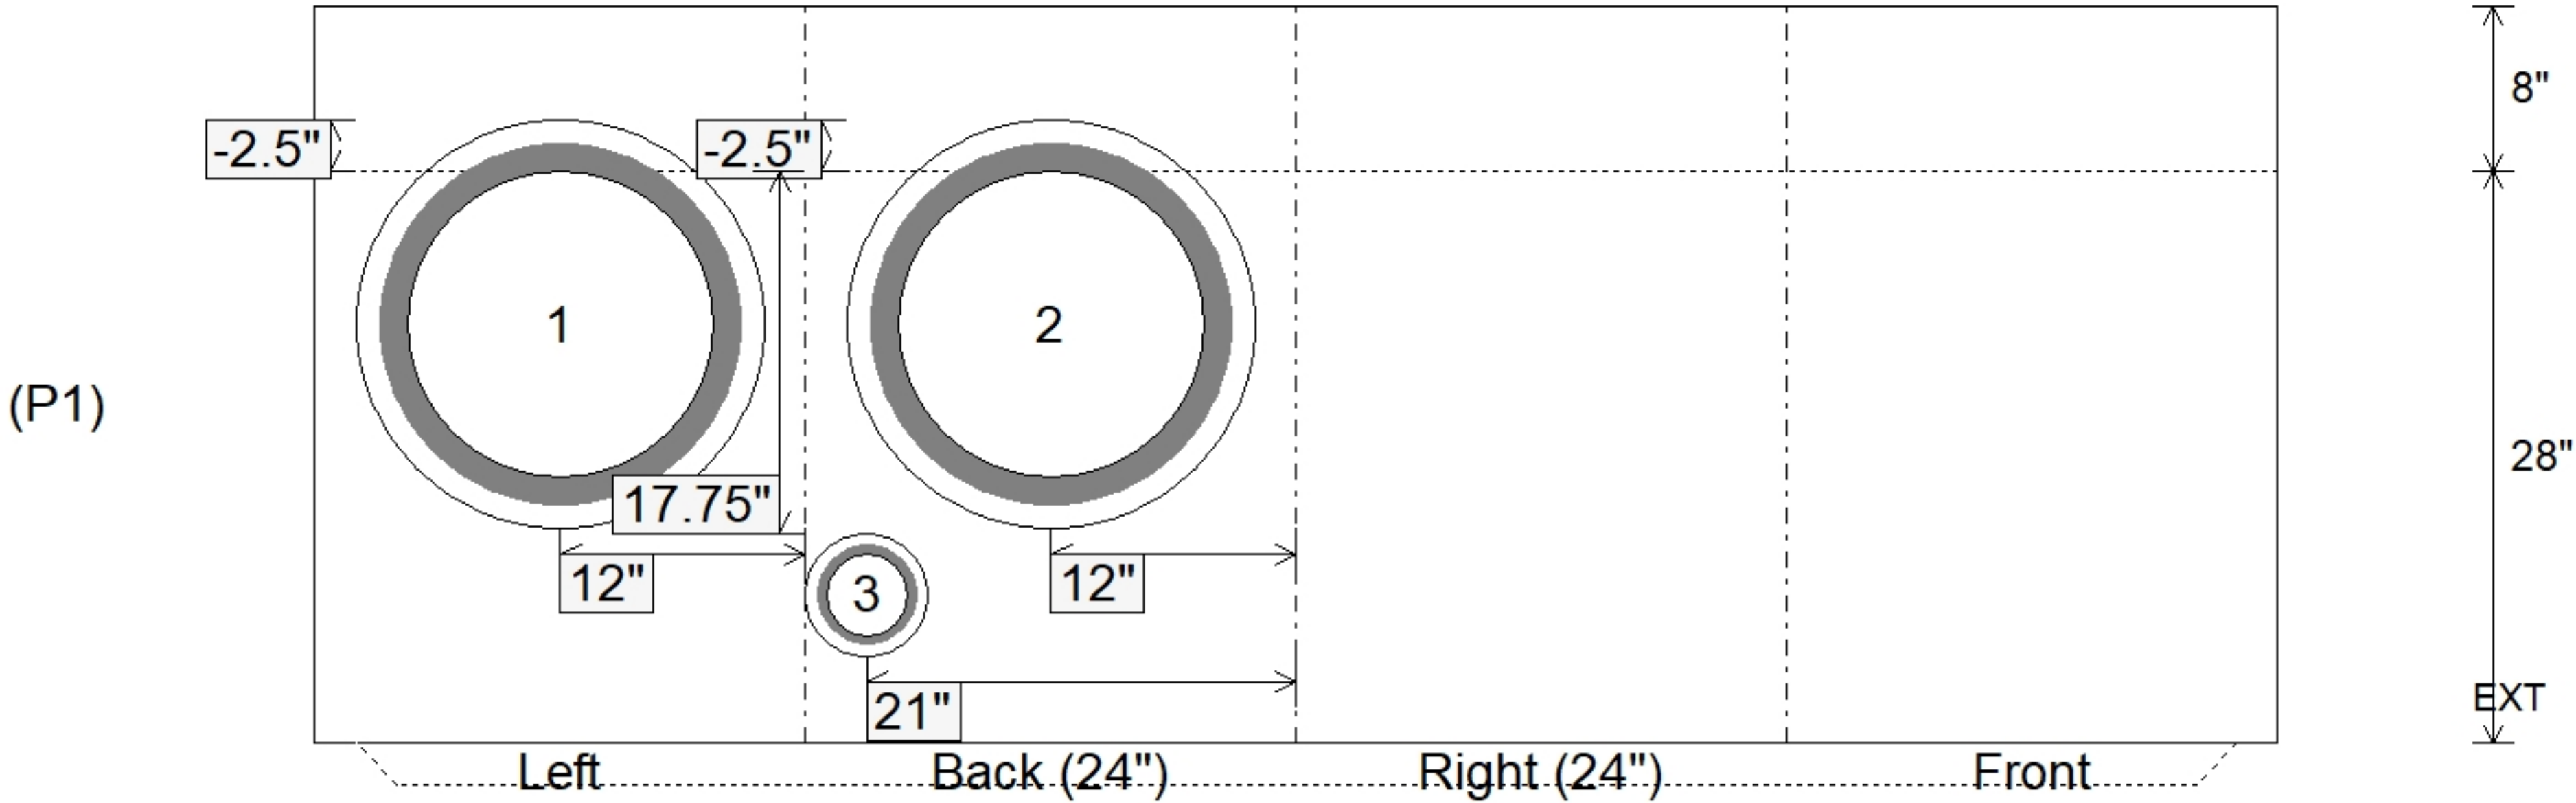

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 28"
Height (Ext): 36"

Weight (Net): 3044 lb
Volume (Net): 0.78cu.yd