


Job Name: 26-1549 Cowan St. Trunk Sewer Job Location: Nashville, TN Contractor: Garney Companies, Inc.					Plant: 100 8/24/2026 11:17:45 AM		Tech: Jared - A PC: Jay Ross Jarvis				
Structure ID: MH-10-13 SS-MH											
P1 MH048BAEVFx			MH BASE EF/Xypex Cust. Ht. 08"F (08"EF =74"OD)								
P7) 24" - CASTING HEIGHT - 7.50" P6) 24" - XYPEX GRADE RING - 4" P5) 48" - CON XYPEX CONE w/24" HOLE-SPECIAL - 36" P4) 48" - MH RISER w/XYPEX/NO STEP - 72" P3) 48" - MH RISER w/XYPEX/NO STEP - 72" P2) 48" - MH RISER w/XYPEX/NO STEP - 72" P1) 48" - MH BASE EF/Xypex Cust. Ht. 08"F (08"EF =74"OD) - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT 1) CASTING - JBS 1123 WT F/C Sanitary 4) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0300					0 lb 270 lb 2251 lb 5030 lb 5030 lb 5030 lb 4494 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 0 lb 2 lb		Structure Notes: PLAN LABEL: MH-10 1. JBS 1123 WT F/C SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. ADMIXTURE = XYPEX C-1000 RED. 5. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. 6. DOUBLE BANDS FOR BOOTS 7. **NO STEPS**				
Structure Total: 23797 lb											
Rim: 413.82'		Rim to Invert: 23.98'		Slack: 2.26"		Sump: 2"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	389.84'	0°	0"	8" DI	9"	A-Lok 0300	10.25"	10.33"	0.875"	0"	
Invert 2	389.94'	241°	121.981"	8" DI	9"	A-Lok 0300	10.25"	10.33"	2.075"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

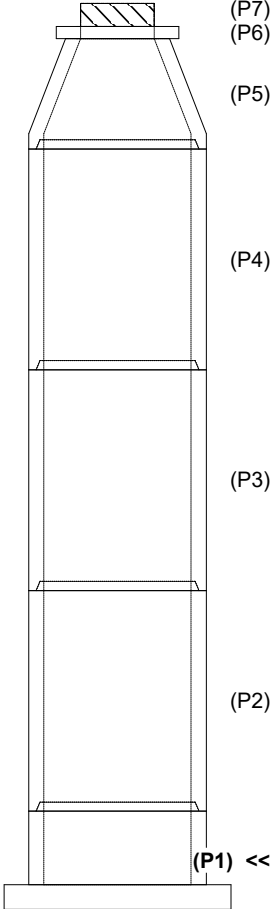

(P7)
(P6)

(P5)


(P4)

(P3)

(P2)

(P1) <<


RIGHT-SIDE UP VIEW (int. dimensions)

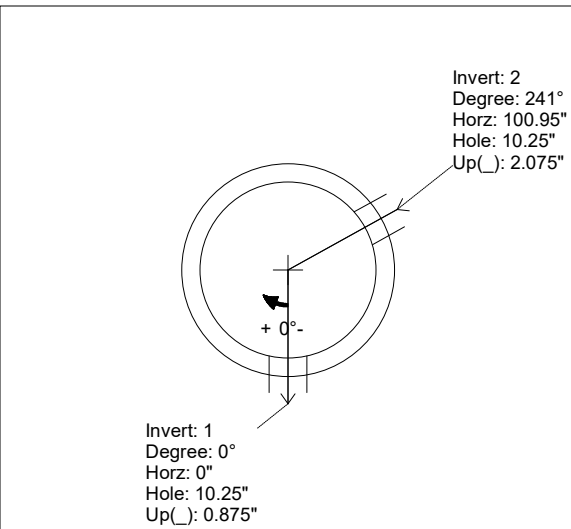

Invert: 2
Degree: 241°
Horz: 100.95"
Hole: 10.25"
Up(): 2.075"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 10.25"
Up(): 0.875"


UPSIDE-DOWN VIEW (int. dimensions)

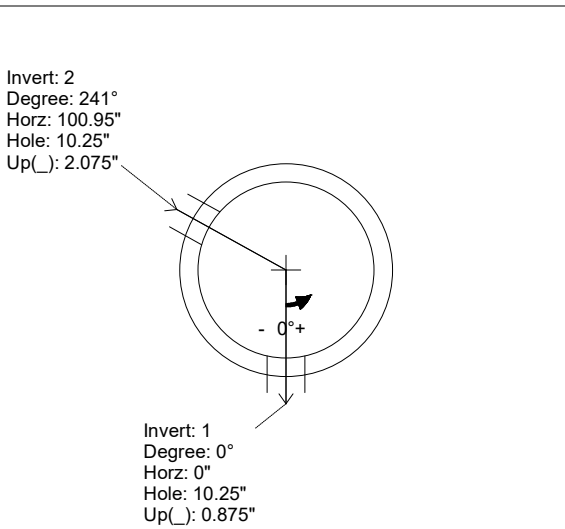

Invert: 2
Degree: 241°
Horz: 100.95"
Hole: 10.25"
Up(): 2.075"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 10.25"
Up(): 0.875"

INSIDE WALL DIMENSIONS

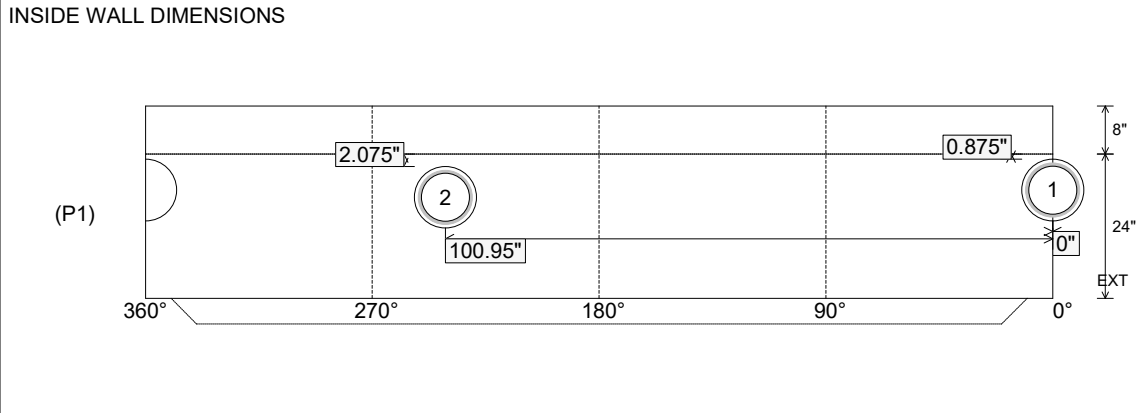


(P1)

360° 270° 180° 90° 0°

8"
24"
EXT

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 8"	Height (Int): 24" Height (Ext): 32"	Weight (Net): 4494 lb Volume (Net): 1.15cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 26-1549 Cowan St. Trunk Sewer Job Location: Nashville, TN Contractor: Garney Companies, Inc.					Plant: 100 8/24/2026 11:17:45 AM		Tech: Jared - A PC: Jay Ross Jarvis				
Structure ID: MH-10-13 SS-MH											
P1 MH048BAEVFx			MH BASE EF/Xypex Cust. Ht. 08"F (08"EF =74"OD)								
P7) 24" - CASTING HEIGHT - 7.50" P6) 24" - XYPEX GRADE RING - 4" P5) 48" - CON XYPEX CONE w/24" HOLE-SPECIAL - 36" P4) 48" - MH RISER w/XYPEX/NO STEP - 72" P3) 48" - MH RISER w/XYPEX/NO STEP - 72" P2) 48" - MH RISER w/XYPEX/NO STEP - 72" P1) 48" - MH BASE EF/Xypex Cust. Ht. 08"F (08"EF =74"OD) - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT 1) CASTING - JBS 1123 WT F/C Sanitary 4) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0300					0 lb 270 lb 2251 lb 5030 lb 5030 lb 5030 lb 4494 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 0 lb 2 lb		Structure Notes: PLAN LABEL: MH-10 1. JBS 1123 WT F/C SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. ADMIXTURE = XYPEX C-1000 RED. 5. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. 6. DOUBLE BANDS FOR BOOTS 7. **NO STEPS**				
Structure Total: 23797 lb					INVERT CHANNEL DRAWING FULL HEIGHT INVERT						
Rim: 413.82'		Rim to Invert: 23.98'		Slack: 2.26"		Sump: 2"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	389.84'	0°	0"	8" DI	9"	A-Lok 0300	10.25"	10.33"	0.875"	0"	
Invert 2	389.94'	241°	121.981"	8" DI	9"	A-Lok 0300	10.25"	10.33"	2.075"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

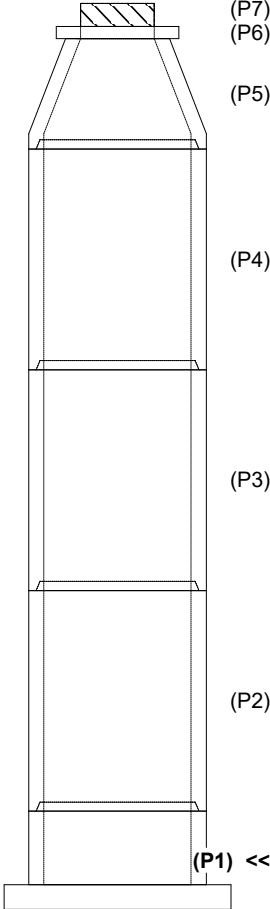

(P7)
(P6)

(P5)


(P4)

(P3)

(P2)

(P1) <<


RIGHT-SIDE UP VIEW (int. dimensions)

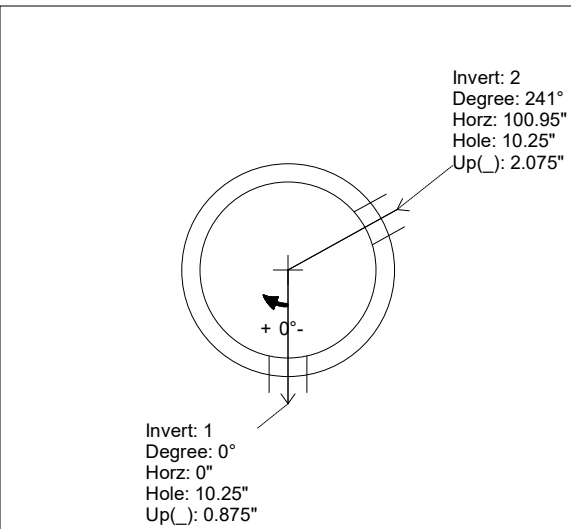

Invert: 2
Degree: 241°
Horz: 100.95"
Hole: 10.25"
Up(): 2.075"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 10.25"
Up(): 0.875"


UPSIDE-DOWN VIEW (int. dimensions)

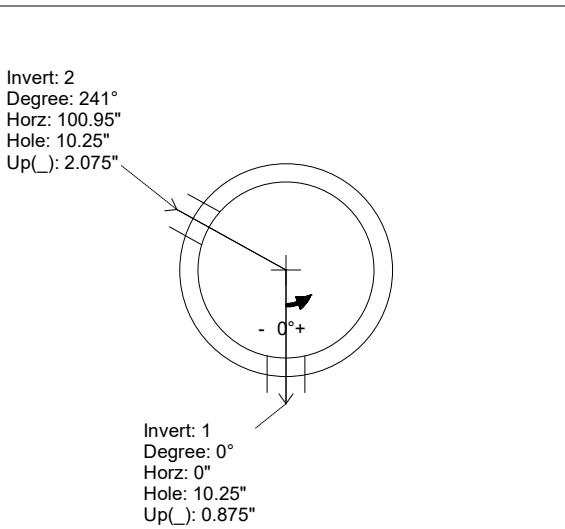

Invert: 2
Degree: 241°
Horz: 100.95"
Hole: 10.25"
Up(): 2.075"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 10.25"
Up(): 0.875"

INSIDE WALL DIMENSIONS

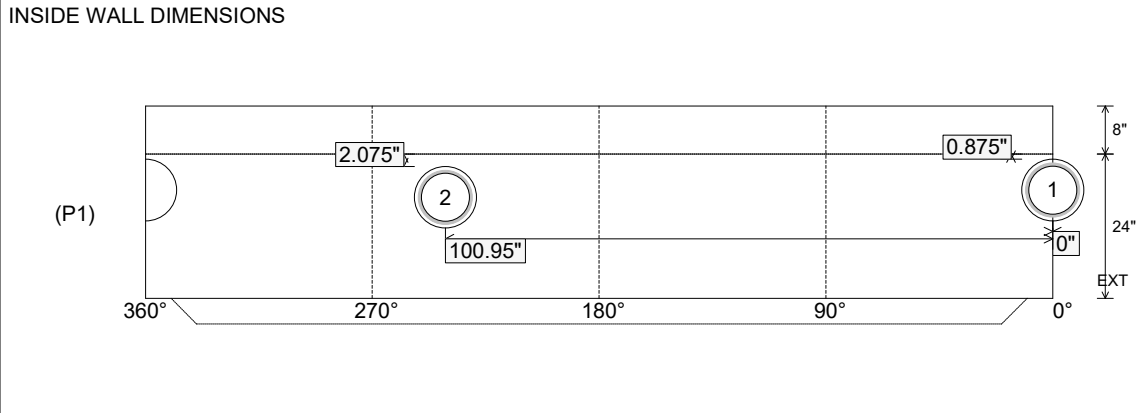

(P1)

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 8"	Height (Int): 24" Height (Ext): 32"	Weight (Net): 4494 lb Volume (Net): 1.15cu.yd
----------------------------------	---------------------------------	--	--	--