

Job Name: 26-1555 - Berry Global East Parking Lot Consolidation
 Job Location: Evansville, IN
 Contractor: Deig Bros Lumber & Construction Co, Inc.

Plant: 100
 4/10/2026 12:21:18 PM

Tech: Jared - F
 PC: A. Chambers



Structure ID: CI 102-3 ST-IN

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P3) 24" - CASTING HEIGHT - 10"
- P2) 24" x 36" - CB FLAT TOP 8"W w/24"Hole F/F - 6"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 52"
- 1) CASTING - BMP SNOOT 18F w/ KIT
- 1) CASTING - HOE R-3305 TYPE 3 F/C
- 1) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 14

0 lb
 819 lb
 6588 lb
 25 lb
 443 lb
 0 lb
 0 lb

 Structure Total: 7876 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE R-3305 TYPE 3 F/C).



REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 385.18' Rim to Invert: 2.7' Slack: 0.4" Sump: 36" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (↓)	Offset
Invert 1	382.48'	25°	23.25"	10" HDPE	11.4"	Hole 14	14"	15.447"	35.25"	-8"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

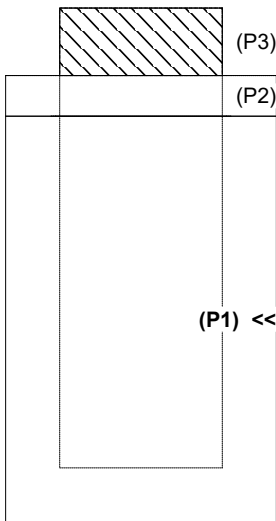


Invert: 1
 Degree: 25°
 Horz: 11.625"
 Hole: 14"
 Up(↓): 35.25"



Invert: 1
 Degree: 25°
 Horz: 11.625"
 Hole: 14"
 Up(↓): 35.25"

INSIDE WALL DIMENSIONS

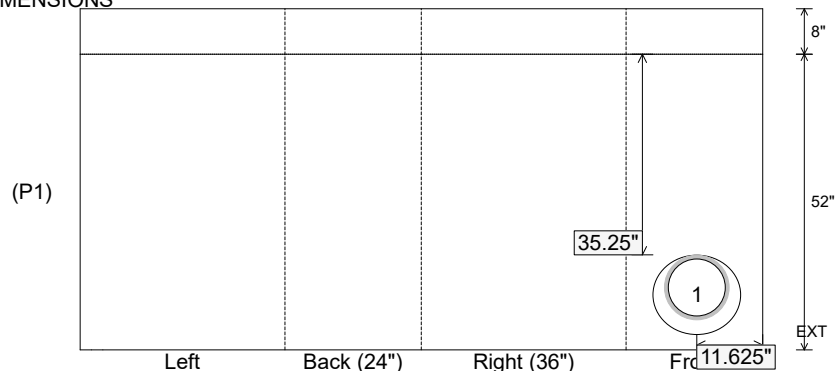

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 52"
 Height (Ext): 60"

Weight (Net): 6588 lb
 Volume (Net): 1.68cu.yd