




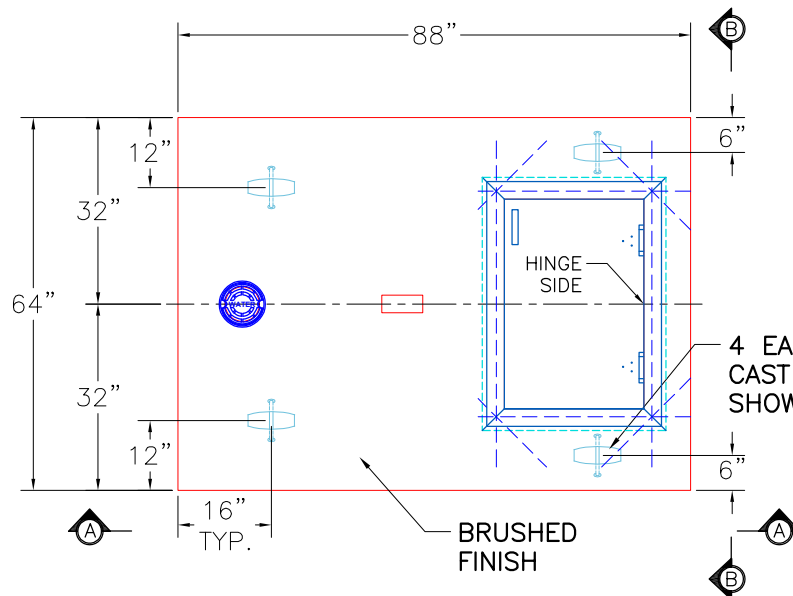

TOP VIEW

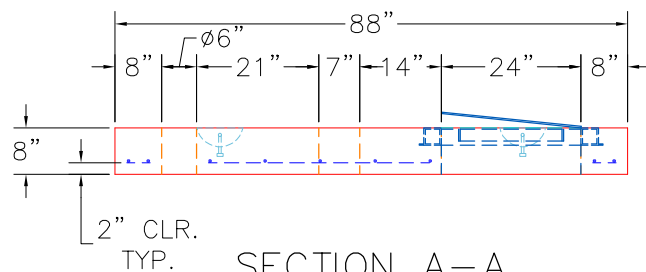

SECTION A-A

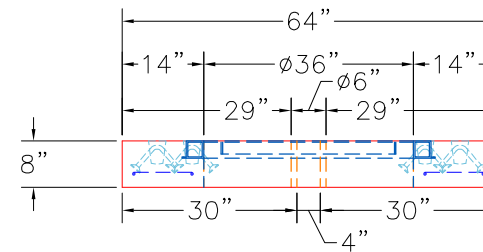

SECTION B-B

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615. (GRADE 60).
- TOP SLAB: #4 BAR @ 6" C.C.E.W.
4. WEIGHTS: TOTAL = 3,160 LBS
5. CASTING: CLAY & BAILEY 2194 TOP HAT F/C BY ICAST. CAST-IN.
6. HATCH: HALLIDAY S1R 24" X 36" BY ICAST. CAST-IN.

4 EA. CONAC 5CA14 ANCHORS
CAST IN THE TOP SLAB AS
SHOWN FOR HANDLING.

BRUSHED
FINISH

PRODUCTION WORK ORDER

PRODUCT I.D.: BX048072-08LD08S

DESCRIPTION: 48" X 72" X 8" THICK TOP SLAB



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING(S) CORRECT LOCATION.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: CONVERGENT WATER TECHNOLOGIES

PLANT: BEAVER DAM, KY.

PROJECT: PALM ST. SMART POND

WEIGHT: 3,160 LBS.

STRUCTURE: QL1

TOP SECTION JOINT: N/A

ORDER NO: 26-1706

BASE SECTION JOINT: N/A

PC: C. GOFF

DRAWING: S. FELLETER

QC CHECK INITIALS:

DATE: 07/29/26

SCALE: NTS

PG. 1 of 1